


CODED - Cloud-Optimized Distributed Earth Data

IPFS (InterPlanetary File System) is a viable way to preserve scientific data. A **Zarr** or **Icechunk** dataset converts to content-addressed **IPFS** in one command, pins on a service like Filebase, and re-opens straight into **xarray** - takedown-resistant, verifiable, and performant enough for real work.

Cory Levinson • Rich Signell • Brian Terry

★ An ESIP Funding Friday Project

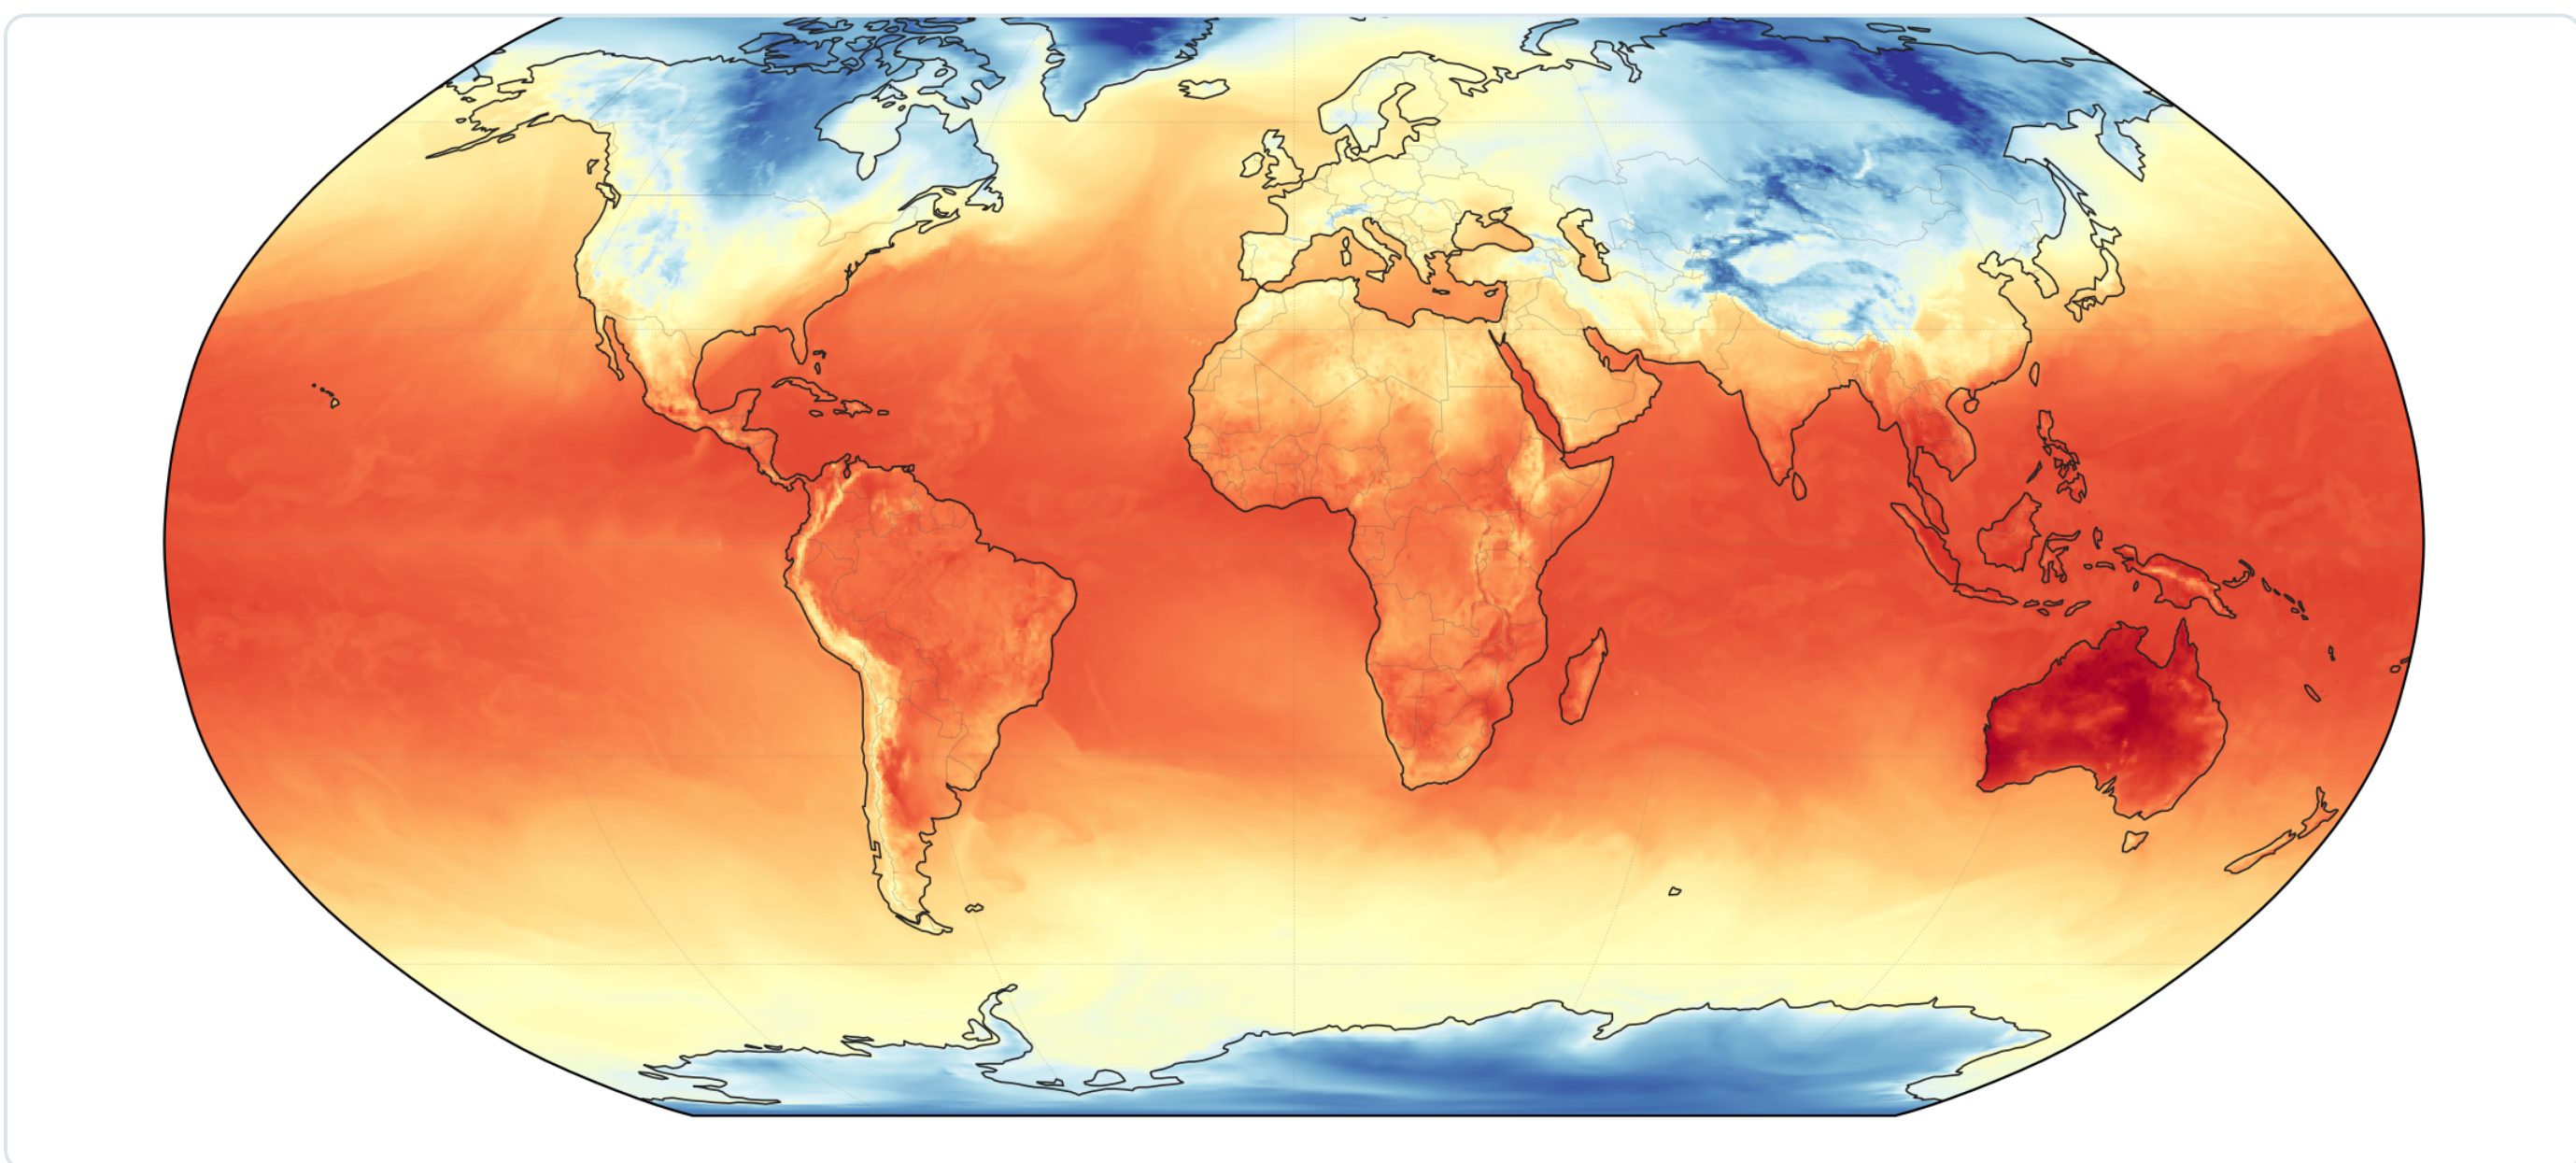

Live proof: this global ERA5 2 m-temperature field was opened **straight from IPFS** - `icechunk.http_storage("ipfs.io/ipfs/<CID>")` → `xr.open_zarr` - in **<1 s**. Content-addressed data, real analysis, no download step.

Why preserve on IPFS?

Important environmental datasets can vanish when an institution reorganizes, loses funding, or is told to take them down. **IPFS** stores data by **content hash**, not by owner or location - so a dataset stays reachable and verifiable no matter who hosts it.

The good news: the cloud-optimized formats the community already uses - Zarr and Icechunk - drop onto IPFS as-is, and open right back up in xarray.

What we verified

- **It survives your node.** With our EC2 node off, the CID still resolved & opened via public gateways (Filebase, ipfs.io, dweb.link) - Filebase kept serving it.
- **The data is exactly the data.** The CID is a hash of the bytes - tamper-evident, byte-identical across every read (maxdiff 0.0).
- **No new tooling.** `ipfs add` to publish, `icechunk.http_storage` to read - the formats you already use, unchanged.

Step 1 • Preserve your dataset - CID on Filebase

Have an existing **Zarr** or **Icechunk** store you can't afford to lose? Add it to IPFS for a content identifier (CID), then pin that CID on **Filebase** (an IPFS + Filecoin pinning service, free to 5 GB / 500 pins) - or **any public IPFS node** - so it stays available, verifiable, and independent of any single institution.

```
# add your existing store to IPFS → one root CID
cid=$(ipfs add -rQ --cid-version=1 my.icechunk/)
# pin that CID on Filebase (IPFS + Filecoin) - stays alive
# independent of your own node. Same CID, now persistent.
```

The **CID is a hash of the data** — tamper-evident and location-independent. Our live ERA5 store:
`bafybeiecltl3mtags2i3jeumxe5c7zuvj2r76zxwsg6tfljiouvvywqzbaq`
One CID = the whole queryable store. Re-chunked to 100 blocks (5 timesteps each) to fit the free-tier pin budget - **data byte-identical** (maxdiff 0.0).

... and it's performant enough

We read the **same 2.08 GB ERA5** temperature slice (100 Icechunk blocks) over IPFS via `http_storage`, against a **native Icechunk-on-S3** baseline. Every path returns a bit-identical mean = **286.5062 K**.

	~8 s warm / local read (beats S3-Icechunk)	~260 MB/s once cached locally
Read path	Same-region	Cross-region
IPFS local pin / warm	~8 s	~8 s
Icechunk-on-S3 (baseline)	~14 s	~14 s
IPFS cold, first pull	~75 s	~101 s

Only the first cross-network pull of the full 2 GB is slow; it caches away and repeat reads beat S3. Pin near your readers (or co-locate a gateway) and IPFS delivers S3-class throughput.

How we built this →
We chatted with an OpenClaw AI agent over Telegram - it ran the benchmarks, spun nodes up and down, and drafted these figures.



Step 2 • Icechunk reads IPFS - no adapter

Icechunk 2.0.5 ships `http_storage(base_url=...)`, a read-only store over HTTP. Point it at an IPFS gateway path and the whole repo opens in `xarray` - the on-disk layout survives `ipfs add -r` untouched. **Zero adapter code.**

```
import icechunk, xarray as xr

GATEWAY = "https://ipfs.io"
CID = "bafybeiecltl3mtags2i3jeumxe5c7zuvj2r76zxwsg6tfljiouvvywqzbaq"

# read-only Icechunk repo, straight from a CID over IPFS
storage = icechunk.http_storage(f"{GATEWAY}/ipfs/{CID}")
repo = icechunk.Repository.open(storage)
ds = xr.open_zarr(repo.readonly_session("main").store,
                  consolidated=False, chunks={})
```

Old CID → old snapshot (reproducibility). Dedup across versions comes free - edits reuse unchanged blocks.

Bottom Line

IPFS is a practical preservation layer for cloud-native Earth data - today. Convert in one command, pin it on a cooperating organization's IPFS node or a commercial pinning service, re-open in `xarray`. Your data becomes content-addressed, takedown-resistant, and reproducible - and it reads back fast enough for real analysis.

Live demo & notebooks: github.com/ESIPFed/coded-blog (see `ipfs-agent/`)

Scan the codes below to run it yourself →



Demo notebook
read ERA5 from IPFS



Final report
full write-up

Acknowledgements: This work was carried out by **chatting with an OpenClaw AI agent over Telegram** (AWS VM, Claude via Amazon Bedrock) - the team steered; the agent ran the benchmarks, provisioned & tore down nodes, and drafted the figures. Thanks to AWS for the ESIP Credits!