






Anchor Layout & Floats




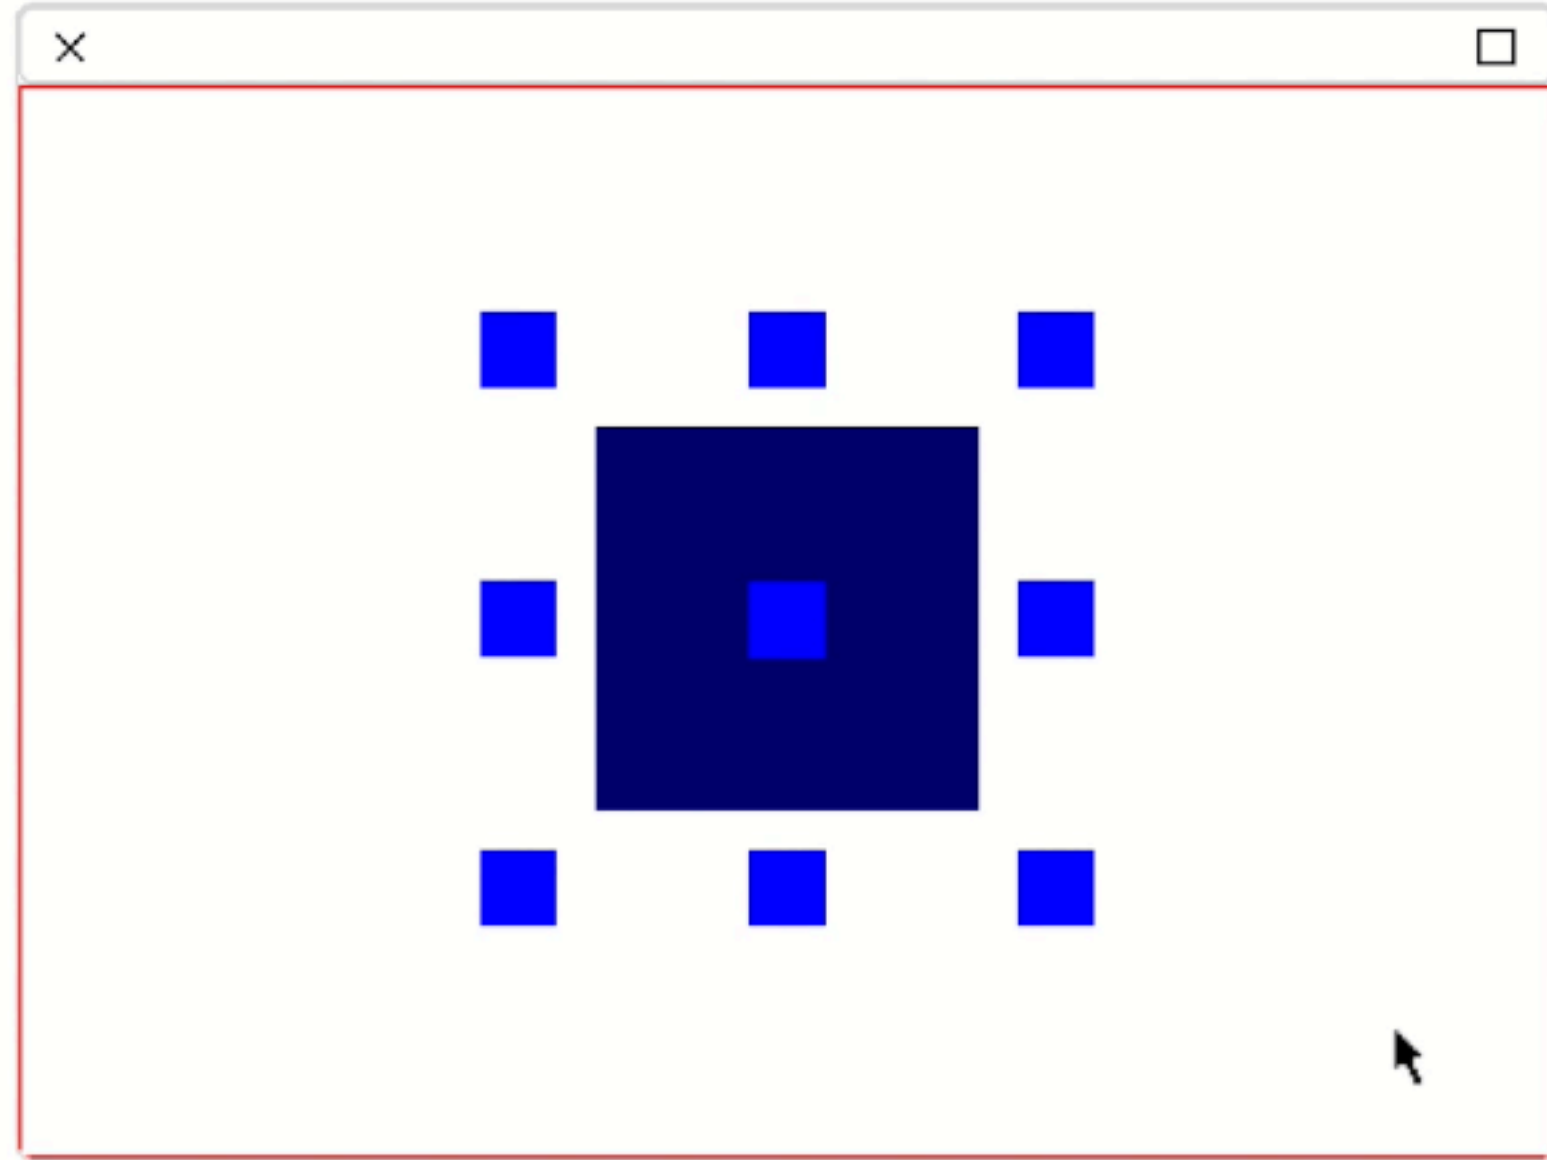

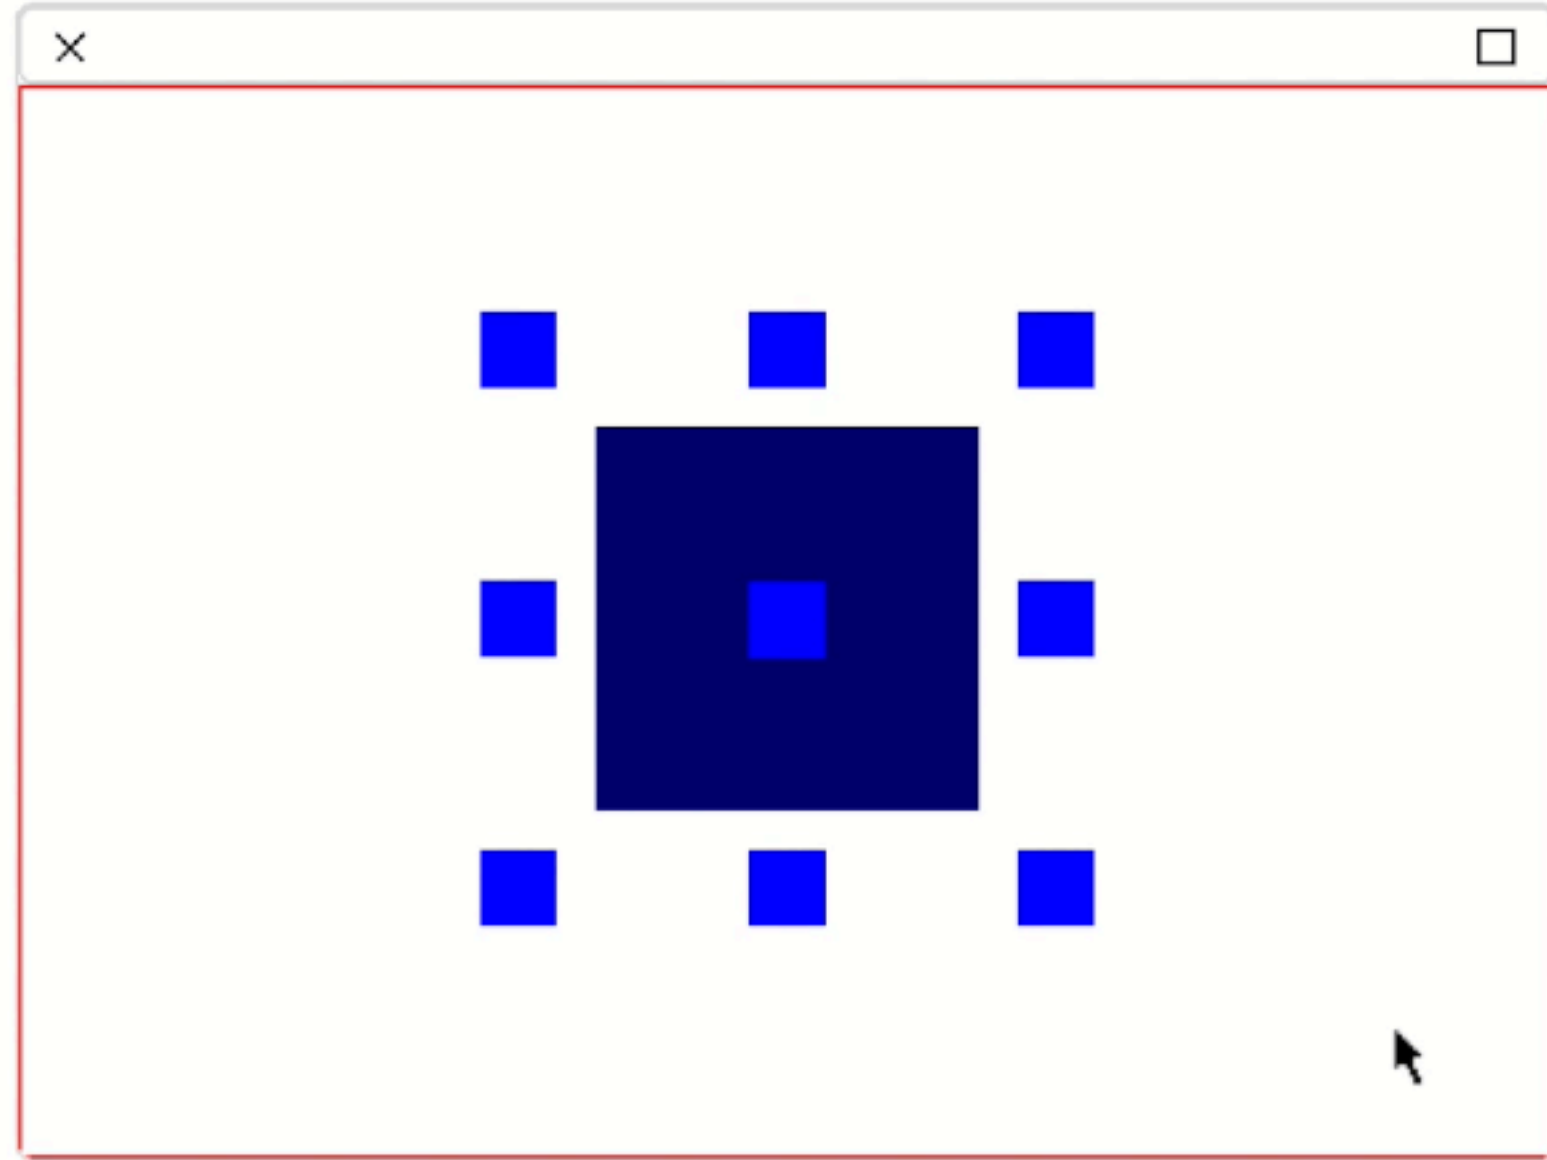

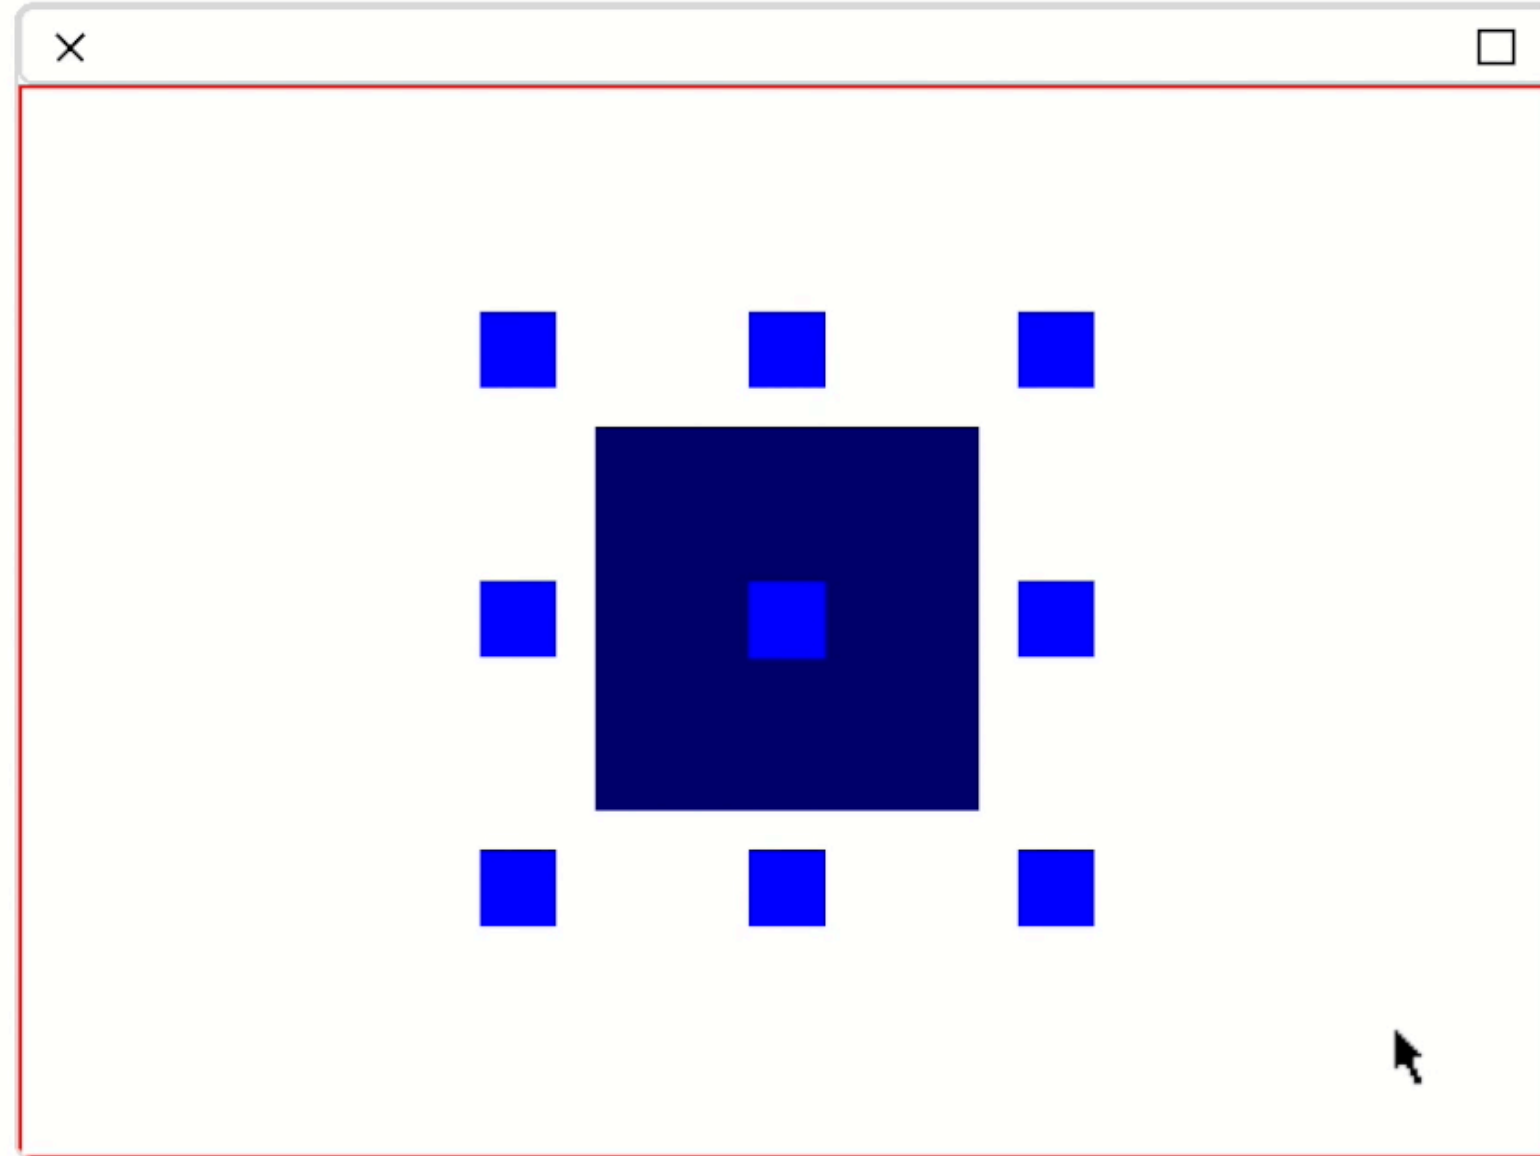

Anchor Layout & Floats

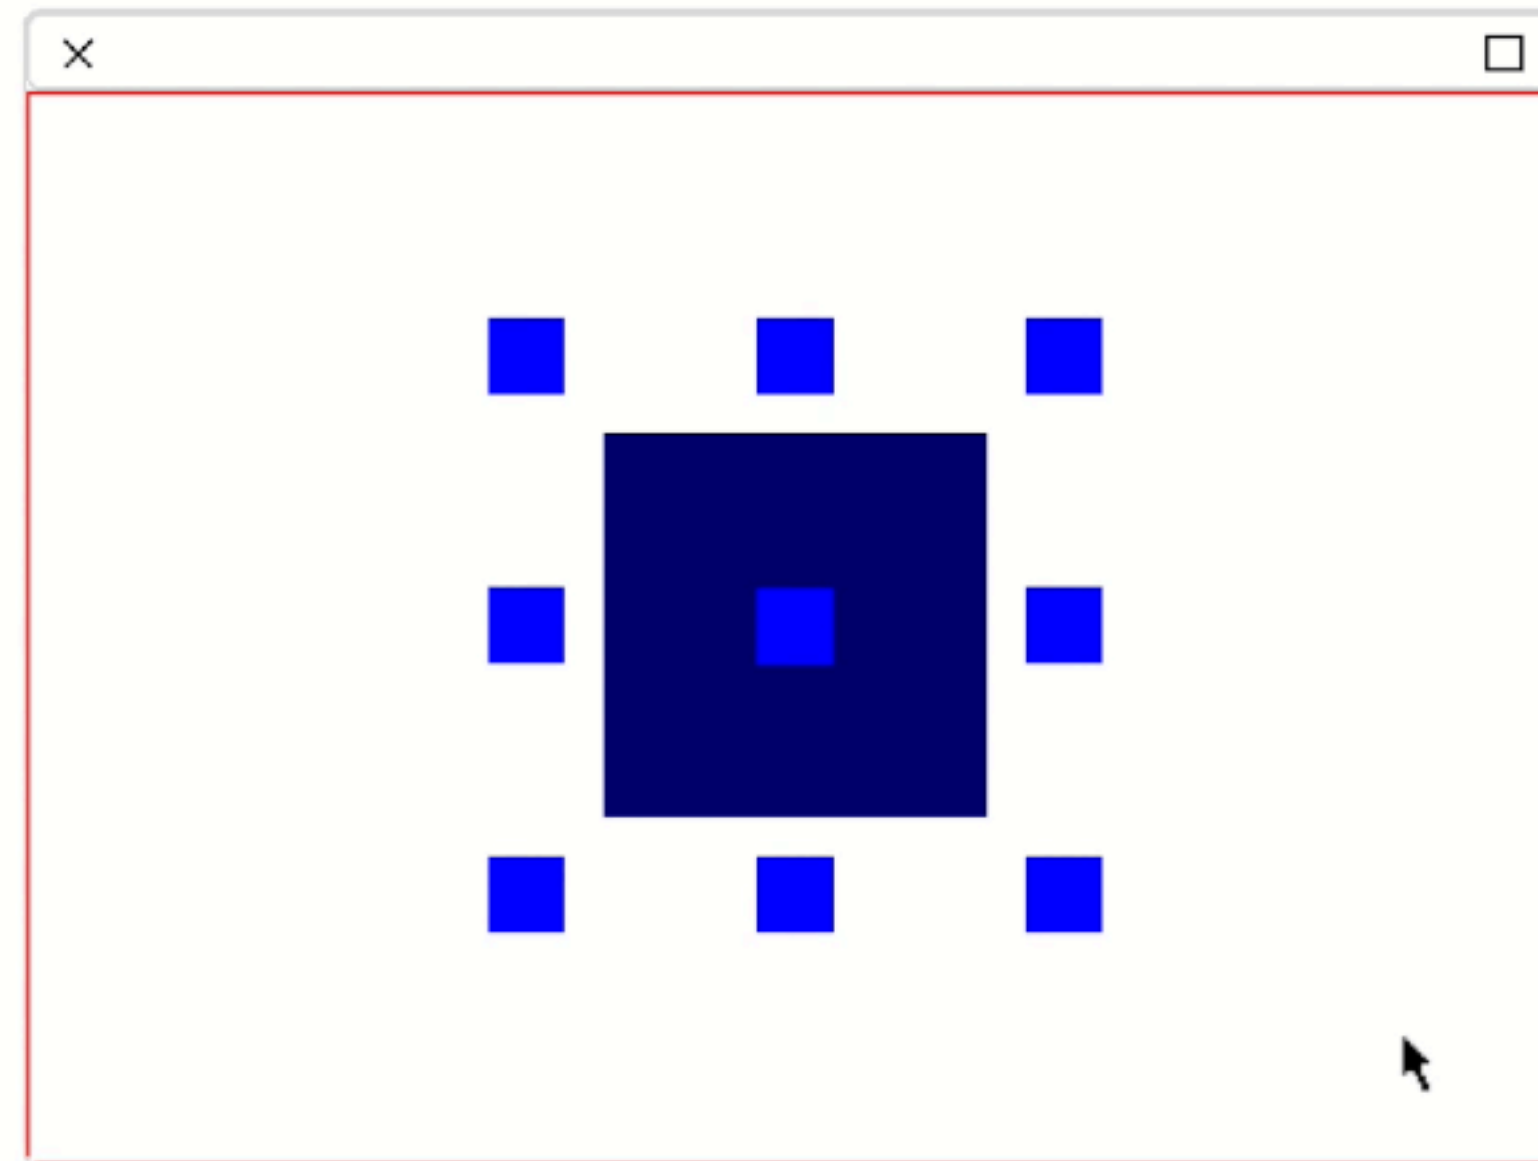

Tree



The screenshot shows the 'Mini browser' window with the following structure:

- Left Panel (Class Hierarchy):**
 - BaselineOfBloc
 - BaselineOfBlocBenchs
 - BaselineOfBlocSerializatio
 - BaselineOfBlocTutorialsBc
 - ▼ Bloc
 - Space** (selected)
 - Effect
 - Utilities - Equalizer
 - DataStructure - Rope
 - Utilities - Selection
 - Events
 - Basic-Math
- Right Panel (Class Side):**
 - Class side (checkbox)
 - BLAttachedCachedSpa
 - ▼ BLAttachedSpaceRefer
 - BLAttachedCached:
 - BLDetachedSpaceRefe
 - BLNullSpaceReference
 - BLSpace** (selected)
 - ▼ BLSpaceReference
 - BLAttachedSpaceR
 - BLDetachedSpaceR
 - BLNullSpaceRefere
 - TBLSpaceProperties
- Method List:**
 - event handling
 - children dispatching
 - api - tasks** (selected)
 - initialization
 - cursor managing
 - change - rendering
 - api - displaying
 - accessing
 - window - properties
 - event management accessing
 - shortcut management
 - event management
 - debug - asserting
- Task Queue Methods:**
 - dequeueTask:
 - enqueueTask:
 - enqueueTasksFrom:** (selected)
 - taskQueue

The main editor area displays the implementation of the `enqueueTasksFrom:` method:

```

1 enqueueTasksFrom: aTaskQueue
2
3 aTaskQueue isEmpty ifTrue: [ ^ self ].
4 aTaskQueue tasks do: [ :eachTask | eachTask onEnqueued: self ].
5 self taskQueue enqueueFrom: aTaskQueue.
6 self requestNextPulse
  
```