



The University of New Mexico

Working with Callbacks

Ed Angel

Professor of Computer Science,
Electrical and Computer
Engineering, and Media Arts
University of New Mexico



Objectives

- Learn to build interactive programs using GLUT callbacks
 - Mouse
 - Keyboard
 - Reshape
- Introduce menus in GLUT



The mouse callback

`glutMouseFunc (mymouse)`

`void mymouse (GLint button, GLint
state, GLint x, GLint y)`


- Returns

- which button (`GLUT_LEFT_BUTTON`,
`GLUT_MIDDLE_BUTTON`,
`GLUT_RIGHT_BUTTON`) caused event
- state of that button (`GLUT_UP`, `GLUT_DOWN`)
- Position in window



Positioning

- The position in the screen window is usually measured in pixels with the origin at the top-left corner
 - Consequence of refresh done from top to bottom
- OpenGL uses a world coordinate system with origin at the bottom left
 - Must invert y coordinate returned by callback by height of window
 - $y = h - y;$

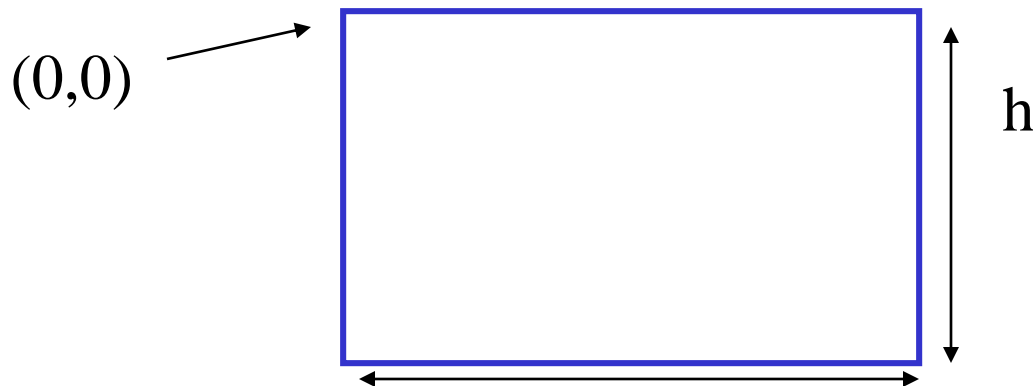



Obtaining the window size

- To invert the y position we need the window height
 - Height can change during program execution
 - Track with a global variable
 - New height returned to reshape callback that we will look at in detail soon
 - Can also use query functions
 - `glGetIntv`
 - `glGetFloatv`
- to obtain any value that is part of the state



Terminating a program

- In our original programs, there was no way to terminate them through OpenGL
- We can use the simple mouse callback

```
void mouse(int btn, int state, int x, int y)
{
    if(btn==GLUT_RIGHT_BUTTON && state==GLUT_DOWN)
        exit(0);
}
```



Using the mouse position

- In the next example, we draw a small square at the location of the mouse each time the left mouse button is clicked
- This example does not use the display callback but one is required by GLUT; We can use the empty display callback function

```
mydisplay() { }
```



Drawing squares at cursor location

```
void mymouse(int btn, int state, int x, int y)
{
    if(btn==GLUT_RIGHT_BUTTON && state==GLUT_DOWN)
        exit(0);
    if(btn==GLUT_LEFT_BUTTON && state==GLUT_DOWN)
        drawSquare(x, y);
}

void drawSquare(int x, int y)
{
    y=w-y; /* invert y position */
    points[i] = point2(x+size, y+size);
    points[i+1] = point2(x-size, y+size);
    points[i+2] = point2(x-size, y-size);
    points[i+3] = point2(x+size, y-size);
    i+=4
}
```




Using the motion callback

- We can draw squares (or anything else) continuously as long as a mouse button is depressed by using the motion callback
`-glutMotionFunc (drawSquare)`
- We can draw squares without depressing a button using the passive motion callback
`-glutPassiveMotionFunc (drawSquare)`



Using the keyboard

```
glutKeyboardFunc(mykey)
```

```
void mykey(unsigned char key,  
            int x, int y)
```

- Returns ASCII code of key depressed and mouse location

```
void mykey()  
{  
    if(key == 'Q' | key == 'q')  
        exit(0);  
}
```



Special and Modifier Keys

- GLUT defines the special keys in `glut.h`
 - Function key 1: `GLUT_KEY_F1`
 - Up arrow key: `GLUT_KEY_UP`
 - `if (key == 'GLUT_KEY_F1'`
- Can also check if one of the modifiers
 - `GLUT_ACTIVE_SHIFT`
 - `GLUT_ACTIVE_CTRL`
 - `GLUT_ACTIVE_ALT`is depressed by
`glutGetModifiers()`
 - Allows emulation of three-button mouse with one- or two-button mice




Reshaping the window

- We can reshape and resize the OpenGL display window by pulling the corner of the window
- What happens to the display?
 - Must redraw from application
 - Two possibilities
 - Display part of world
 - Display whole world but force to fit in new window
 - Can alter aspect ratio







The University of New Mexico

Reshape possibilities

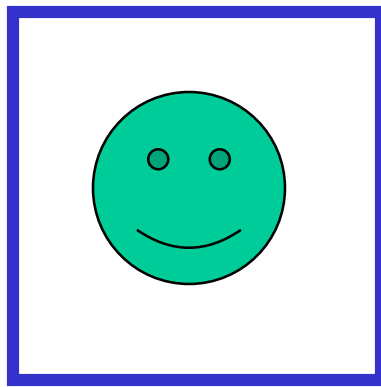

original

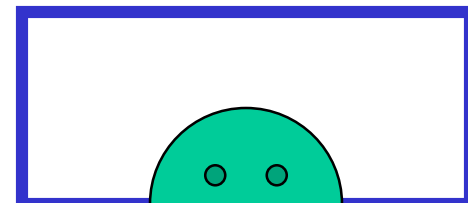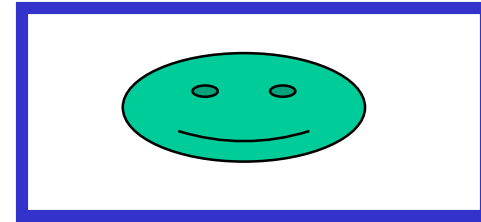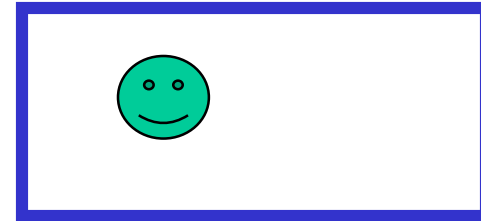

reshaped



The Reshape callback

glutReshapeFunc (myreshape)

void myreshape(int w, int h)

- Returns width and height of new window (in pixels)
- A redisplay is posted automatically at end of execution of the callback
- GLUT has a default reshape callback but you probably want to define your own
- The reshape callback is good place to put viewing functions because it is invoked when the window is first opened



Toolkits and Widgets

- Most window systems provide a toolkit or library of functions for building user interfaces that use special types of windows called *widgets*
- Widget sets include tools such as
 - Menus
 - Slidebars
 - Dials
 - Input boxes
- But toolkits tend to be platform dependent
- GLUT provides a few widgets including menus



Menus


-
- GLUT supports pop-up menus
 - A menu can have submenus
 - Three steps
 - Define entries for the menu
 - Define action for each menu item
 - Action carried out if entry selected
 - Attach menu to a mouse button



Defining a simple menu

- In `main.c`

```
menu_id = glutCreateMenu(mymenu);  
glutAddmenuEntry("clear Screen", 1);  
  
gluAddMenuEntry("exit", 2);  
  
glutAttachMenu(GLUT_RIGHT_BUTTON);
```

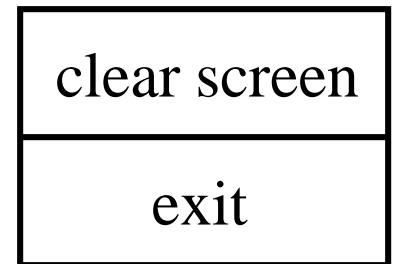

entries that appear when
right button depressed

identifiers



Menu actions

- Menu callback

```
void mymenu(int id)
{
    if(id == 1) glClear();
    if(id == 2) exit(0);
}
```

- Note each menu has an id that is returned when it is created
- Add submenus by

```
glutAddSubMenu(char *submenu_name, submenu id)
```

entry in parent menu



Other functions in GLUT

- Dynamic Windows
 - Create and destroy during execution
- Subwindows
- Multiple Windows
- Changing callbacks during execution
- Timers
- Portable fonts (deprecated)