



**Escape - an EU Horizon 2020 project - 824064**

# **Abell1656: the Coma Cluster of Galaxies**

Massimo Ramella & Giulia Iafrate  
INAF - Osservatorio Astronomico di Trieste

last update 03.02.2020

Massimo Ramella & Giulia Iafrate  
*Initial development of the tutorial*

Caroline Bot & Thomas Boch  
*updated for the doctoral day in Paris*

Jenny G. Sorce  
*updated with the new template for ASTERICS & new plots*

Katharina A. Lutz  
*updated to Aladin v10 and ESCAPE template*

# Contents

<b>1</b>	<b>Introduction</b>	<b>4</b>
<b>2</b>	<b>Display the region of Abell 1656 in Aladin</b>	<b>4</b>
<b>3</b>	<b>Load the SDSS-DR9 catalogue and select galaxies</b>	<b>5</b>
<b>4</b>	<b>Identify the brightest sources as being stars contaminating the sample</b>	<b>7</b>
<b>5</b>	<b>Build a subset of galaxies with photometry (rmag) and redshift (zsp) in SDSS</b>	<b>7</b>
<b>6</b>	<b>Improve the completeness with other sources of redshifts in vizier</b>	<b>8</b>
<b>7</b>	<b>Build the final catalogue including Rines+ redshifts</b>	<b>9</b>
<b>8</b>	<b>Determine the cz distribution, <math>\langle cz \rangle</math> and dispersion in TOPCAT</b>	<b>10</b>
<b>9</b>	<b>Look for HST spectra in the Coma Cluster</b>	<b>11</b>
<b>10</b>	<b>Visualize and analyse the HST spectrum with CASSIS</b>	<b>11</b>
<b>11</b>	<b>Fit a gaussian and a continuum to the hydrogen line</b>	<b>14</b>
<b>12</b>	<b>Scripting in a Jupyter notebook [optional]</b>	<b>15</b>

# 1 Introduction


Goals:

- Examine the Coma cluster of galaxies (Abell 1656) using VO data and tools in order to perform a quick evaluation of the mean redshift and velocity dispersion of the cluster.
- Use redshifts and photometry (Petrosian r magnitude) of the SDSS survey and then add redshifts of the CAIRNS survey (Rines et al. 2003) in order to improve the completeness of the redshift sample.
- Look for hydrogen lines in HST spectra in the direction of this cluster and check whether the lines are consistent with foreground or with galaxy velocities.

The software packages we require to tackle these tasks are Aladin, TOPCAT and CASSIS.

## 2 Display the region of Abell 1656 in Aladin

- Launch Aladin: Open a terminal and type: `java -jar Aladin.jar &`.
- In Aladin, enter ‘A1656’ (Coma Cluster) in the **Command** slot of the main window.



- Zoom/unzoom to work with galaxies in a region of about 40 by 40 arcmin around the Coma cluster. At the distance of Coma, 40 arcmin corresponds to 1.1 Mpc (with  $H_0=71 \text{ km s}^{-1} \text{ Mpc}^{-1}$ ,  $\Omega_\Lambda=0.73$  and  $\Omega_m=0.27$ ), a region large enough for our purposes. Tip: The cyan/blue numbers at the bottom of the main viewing window and in the overview panel in the bottom right corner of Aladin indicate the area shown in the main viewing window (Figure 1). As a second option draw a 40' long arrow with the **dist** button

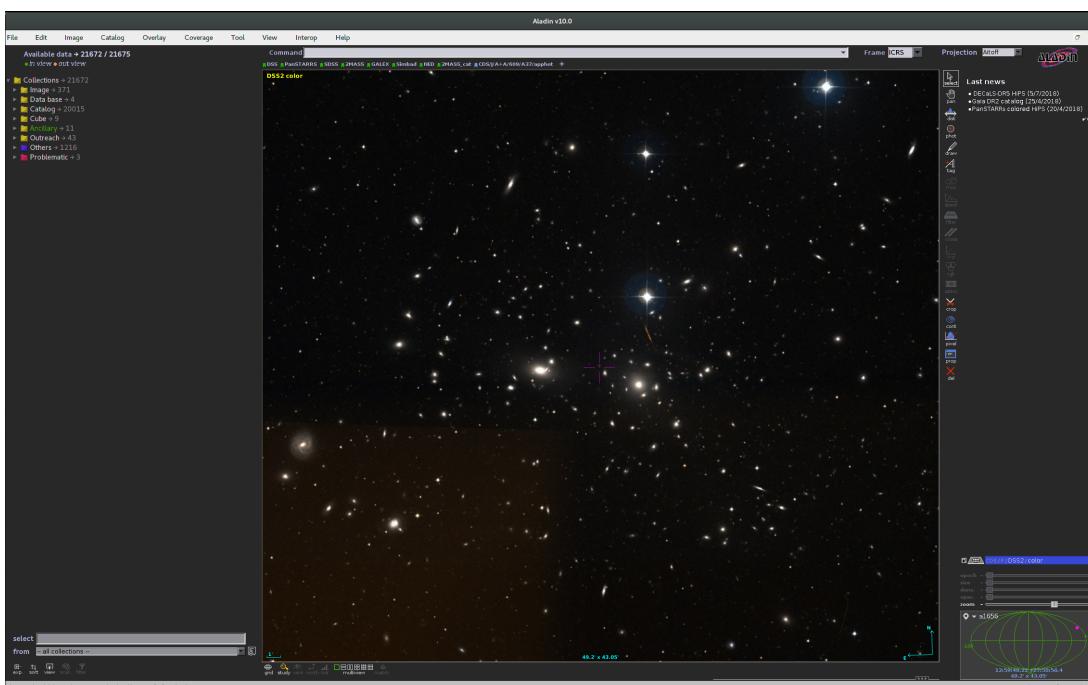


Figure 1: Abell 1656 (Coma Cluster) in Aladin

### 3 Load the SDSS-DR9 catalogue and select galaxies

- Load the SDSS-DR9 catalogue through the DATA TREE: Type "SDSS" in the **Select** line below the **DATA TREE** to limit the resources shown in the DATA TREE to those connected to SDSS  
**select SDSS**. You can further narrow down your search by restricting the collection of data sets with **from from Large catalogs**. More complex filters can be created by clicking on . Under "Catalog" → "VizieR" → "II-Photometric Data" click on SDSS-DR8, make sure that the **in view** box is ticked and click **Load** (Figure 2).

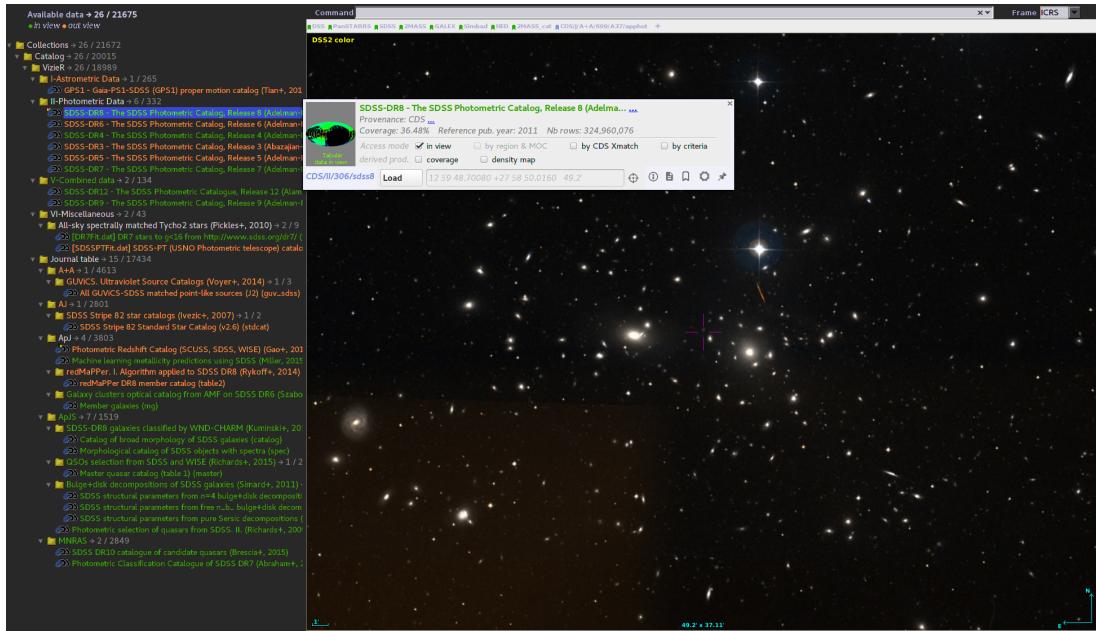


Figure 2: The Aladin DATA TREE when filtered to "SDSS" resources in "large catalogues". Green resources have entries in the area of the sky that is currently shown in the main viewing window, orange ones not. The grey pop-up window allows you to load the data in different ways, e. g. load all data within the field of view or filter the catalogue by MOC.

- Catalogue data of approximately 50,000 sources have now been loaded. To limit this sample to galaxies ( $cl=3$ ) that are also SDSS primary sources ( $mode=1$ ) we continue as follows (Figure 3):

- In the Aladin stack (right), select the catalogue plane, click on the **Filter** button and write the following syntax in the **Advanced mode** tab:  
 $\$c1=3 \& \$mode=1\{draw\}$   
 Clicking **Apply** ensures that our sample is selected according to our selection criteria and that only sources that adhere to these criteria are shown in the main viewing window.
- Still in the filter window, clicking **Export** will build a new plane with only filtered sources included.
- Note that the **Pick** line above the free syntax field is helpful to create other filters.

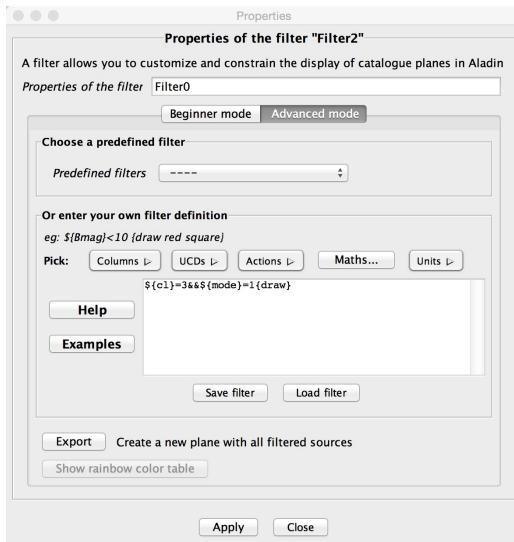


Figure 3: Filtering with Aladin

- Rename this new plane SDSSgalaxies using the **Properties** button . Depending on your field of view the new filtered catalogue includes around 35,000 sources.
- Broadcast the filtered catalogue to TOPCAT. You can do so by right-clicking on the catalogue plane and selecting **Broadcast selected tables to...> topcat**. Beware that TOPCAT must be launched for this function to be enabled.

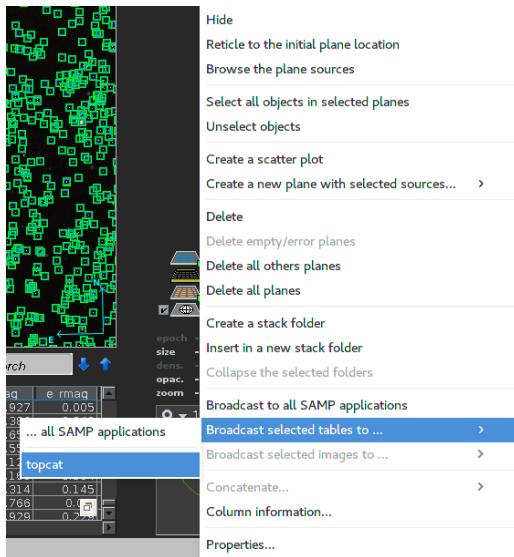


Figure 4: Broadcasting the filtered catalogue to TOPCAT.

- In TOPCAT, display the column metadata with . In the new window, deselect all rows and then select only the four necessary columns: RA\_ICRS (\$10), DE\_ICRS (\$11), zsp (\$12) and rmag (\$17).

## 4 Identify the brightest sources as being stars contaminating the sample

- In the main TOPCAT window, open the subset window  and build a subset of the brightest sources (with magnitudes  $\text{rmag} < 11.5$ ):
  - In the subset-window, click on  to define a new row subset.
  - Subset name:** ‘stars’.
  - Expression:**  $\$17 < 11.5$  or  $\text{rmag} < 11.5$  (Note: TOPCAT expressions do not differentiate small/capital letters. Depending on the column names of the table you might have to use  $\$ID$  of the column rather than its name.  $\$ID$  can be found with **Views → Column Info** or  in the main TOPCAT window).
- There are two options to check in Aladin that each source in the star subsample is indeed a star:
  - In the main TOPCAT window, select the ‘stars’ subset of the SDSSgalaxies catalogue  and broadcast it to Aladin (**Interop → Send table to → Aladin** or ). Switch to Aladin and look through the sources by clicking on their entry in the table. Zoom/unzoom as necessary.
  - In TOPCAT go to **Views → Activation Action** or . In the newly opened window, tick the box of and select **Send Sky Coordinates**. Upon selection you can edit the settings for this activation action. See Figure 5 for the options chosen for our case. If you now display the table cell data () you can click on any table entry and the corresponding source will be displayed in Aladin. Again zoom/unzoom as necessary.

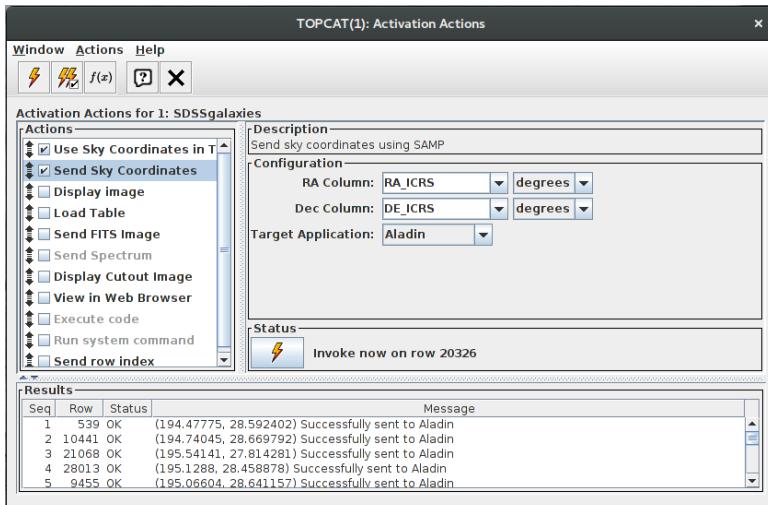


Figure 5: Setting up activation actions in TOPCAT.

## 5 Build a subset of galaxies with photometry (rmag) and redshift (zsp) in SDSS

- In the main TOPCAT window, open the subset window  again and build a subset of galaxies (no stars, i.e.  $\text{rmag} > 11.5$ ) with magnitude  $\text{rmag}$  brighter than 17.77 mag (completeness limit

of the SDSS spectroscopic sample) and redshift information. This can be done with the subset expression: `zsp>0 && rmag<=17.77 && rmag>11.5`. Call this subset ‘`zsp17`’.

- In the main window of TOPCAT select the subset ‘`zsp17`’ and duplicate the table (**File → Duplicate Table**).
- Rename the new table to ‘`zsp17`’.

## 6 Improve the completeness with other sources of redshifts in VizieR

- In TOPCAT, build the subset ‘`nozsp17`’ that contains galaxies with the same magnitude selection as before but no redshifts (use `! (zsp>0)` instead of `zsp>0` in the above expression). Again depending on your field of view the new subset contains between 100 and 200 entries.
- Select the subset ‘`nozsp17`’ in TOPCAT main window, duplicate the table and rename the new table ‘`nozsp17`’.
- In TOPCAT main window, search optical catalogues with redshifts:
  - Go to **VO → VizieR catalogue service**.
  - Select **Cone selection**: **Object name**=‘A1656’, click on **resolve**, **radius**=‘40’ arcmin. Then select **All Rows**.
  - In the **catalogue selection** section: select the **by Keywords** tab and enter ‘redshifts Rines’, load the **Rines+ 2003** catalogue. Two tables are loaded. Delete the cluster catalogue to keep only the galaxy one (**File → Discard Table(s)**).

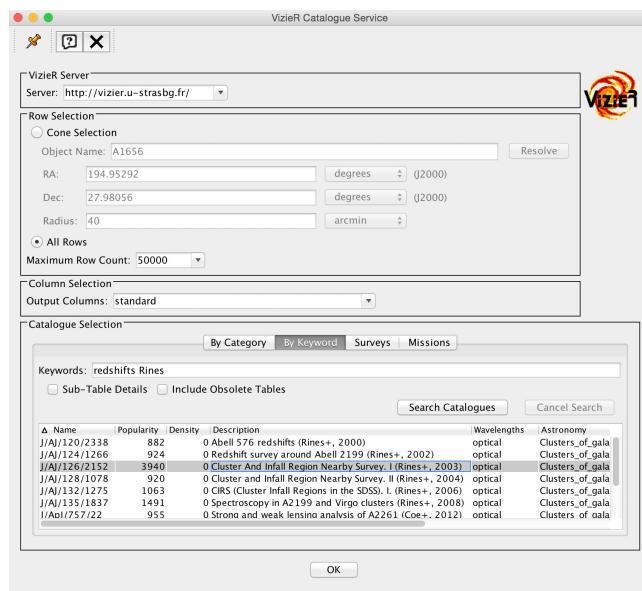


Figure 6: Loading a catalogue from VizieR with TOPCAT.

- Find redshifts in Rines+ catalogue for galaxies without redshift in `nozsp17`:
  - X-match the ‘`nozsp17`’ and the Rines catalogue (**Joins → pair match or** 
  - Use **sky** algorithm with ‘5 arcsec’ max error and choose **Best match, symmetric**. See Figure 7 for more details.

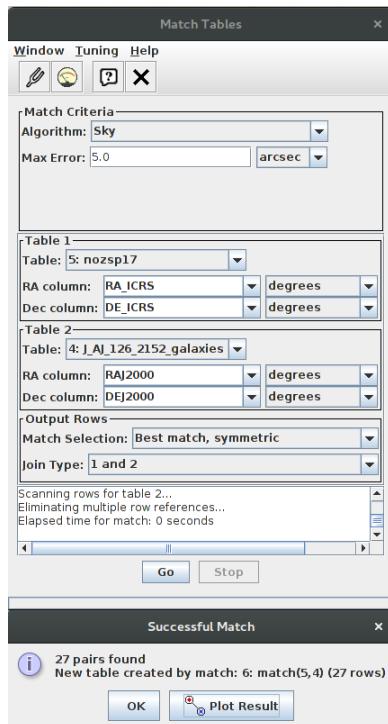


Figure 7: X-matching with TOPCAT.

## 7 Build the final catalogue including Rines+ redshifts

- Add a new column to ‘zsp17’ catalogue to get the apparent radial velocity cz:
  - Click **Table Columns** , then do **Columns** → **New Synthetic Column** or click .
  - **Name:** ‘czsp’
  - **Expression:** `toInteger(zsp*300000)`
- Concatenate ‘zsp17’ and match tables (**Joins** → **Concatenate Tables**). Fill in the **Appended Table** tabs. The final catalogue contains around to 700 galaxies.

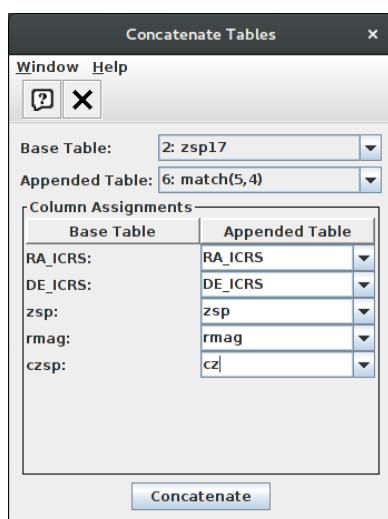


Figure 8: Concatenating with TOPCAT.

## 8 Determine the cz distribution, $\langle cz \rangle$ and dispersion in TOPCAT

- View the histogram of ‘czsp’ values with 
- Isolate the main peak of Coma in the histogram by selecting the appropriate region scrolling your mouse or playing with **Axes** (**Range tab**) and **Bins** (**Bin size**)  (see Figure 9 for an example).

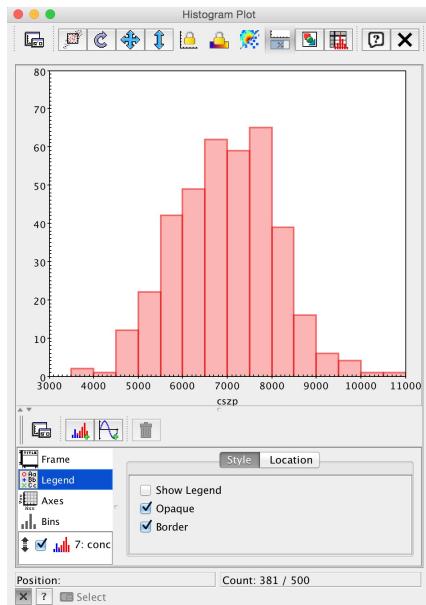


Figure 9: Main peak of the Coma cluster.

- Build a new subset named ‘Coma’ using the range of cz observed in the histogram (proceed as before to build new subsets or once having zoomed in on the Coma peak use this button:  ).
- Select this Coma subset in the main window of TOPCAT and open the **Row Statistics** window  . You will find something like  $\langle cz \rangle \approx 7000 \text{ km s}^{-1}$  and  $\text{SD} \approx 1000 \text{ km s}^{-1}$  both in excellent agreement with more refined analyses (Figure 10).

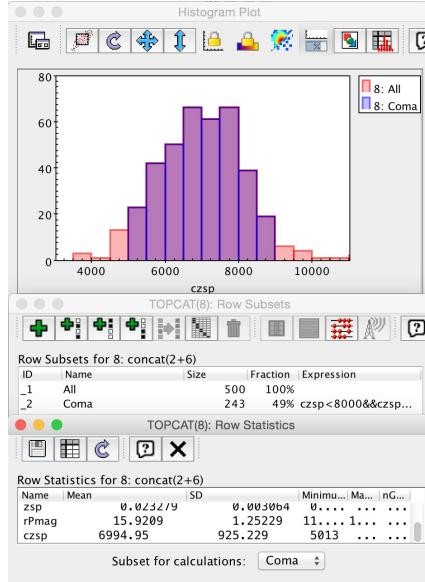


Figure 10: Statistics with TOPCAT.

## 9 Look for HST spectra in the Coma Cluster

- Go back to the Aladin window. Adjust the main viewing window such that once again it is centred on "A1656" and has a field of view of approximately  $40 \times 40$  arcmin.
- Type "HST" in the **Select** line and set **from** to "- - all collections - -". Narrow down the search in the Data discovery Tree filter window by ticking the box of **SSA** (for Simple Spectral Access) in the **Technical** tab.
- Select **Others** → **SSA** → **mast.stsci** → **Hubble Space Telescope Spectra**, tick **in view** and then **Load** the table.
- Find the table entry for source 1257-2840 and (left-) click on the link in the url of the spectrum (in the first column). This will open an menu and allow you to broadcast the spectrum to CASSIS (if CASSIS is up and running).

#	url	ra obs	dec obs	coord targ	coord obs	object
1	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
2	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
3	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
4	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
5	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
6	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
7	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
8	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
9	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
10	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
11	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
12	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
13	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
14	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
15	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
16	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
17	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
18	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
19	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
20	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
21	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
22	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
23	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
24	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
25	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
26	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
27	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
28	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
29	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
30	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
31	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
32	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
33	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
34	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
35	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
36	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
37	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
38	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
39	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
40	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
41	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
42	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
43	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
44	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
45	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
46	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
47	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
48	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
49	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
50	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
51	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
52	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
53	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
54	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
55	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
56	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
57	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
58	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
59	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
60	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
61	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
62	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
63	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
64	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
65	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
66	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
67	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
68	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
69	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
70	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
71	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
72	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
73	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
74	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
75	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
76	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
77	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
78	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
79	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
80	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
81	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
82	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
83	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
84	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
85	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
86	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1258+285
87	<a href="http://archive.s">http://archive.s</a>	195.2537375	28.3289472	195.25373750	2.195.2537375	28. QSO-1

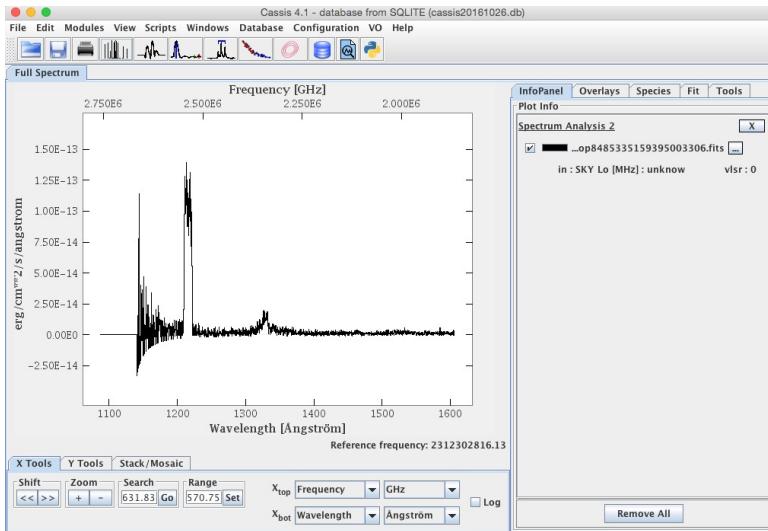


Figure 12: Visualisation of the spectrum with CASSIS.

- To check that these are hydrogen lines ( $\text{Ly}\alpha$ ), one at the local velocity, the other at the velocity of the Coma cluster (Figure 13):
  - Select the **Species** tab. Choose the **Full NIST** database in the **Template** section.
  - Unselect all species by clicking on the **Sel.** column.
  - Select the sole **HI** line by ticking only this line.
  - The maximum **Eup threshold** is by default too low for our case. Remove the ‘150.0K’ and replace it with ‘\*’ to get all the HI transitions without any threshold in energy.
  - Tick **show signal** and click **Display** at the bottom of the window. A green tick appears below the largest of the two lines. This confirms that this line is an Hydrogen line at a zero velocity. Clicking on the green tick gives more information on the line parameters. A right click allows you to edit the overlay (useful for a copy-paste).

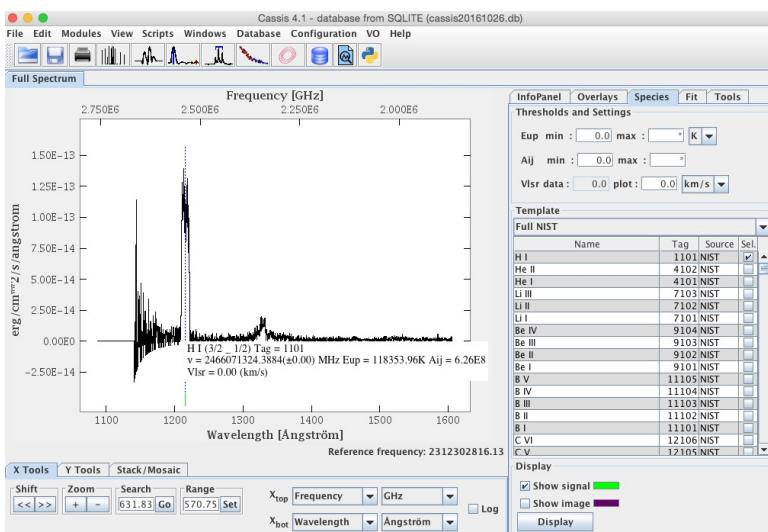


Figure 13: Spectrum with CASSIS. The the blue, dotted line and the green dash mark the location of the  $\text{Ly}\alpha$  line at a line of sight velocity of  $0.0 \text{ km s}^{-1}$

- To look for the LSR velocity of the galaxy in SIMBAD:

- Go back to the Aladin window and centre the image on the pointing centre of the HST spectral observations by double-clicking on the table row of the source 1257-2840. Zoom in or out as necessary.
- Make sure that the **Simbad Pointer** is activated (a tick next to **Tool → Simbad pointer**).
- Hover over of the pointing centre of the HST spectral observations until a small window appears.

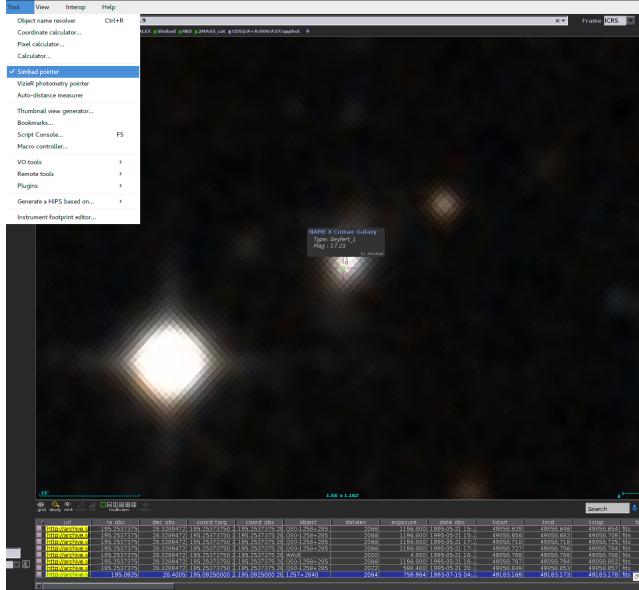


Figure 14: How to enable and operate the SIMBAD pointer in Aladin.

- Clicking on the name of this galaxy (NAME X COMAE GALAXY) opens a web browser with all the SIMBAD information for this object.
- The radial velocity for this galaxy is  $27332.1 \text{ km s}^{-1}$ .
- Note that this galaxy is not part of the Coma cluster since the velocity of the Coma cluster is  $6845 \text{ km s}^{-1}$ . This value can be found with SIMBAD looking for A1656. The hierarchical link [parents](#) on NAME X COMAE GALAXY in SIMBAD confirms that the probability of this galaxy to belong to Coma is 0%.
- Go back to CASSIS and change the **Vlsr plot** field from 0 to  $2.7e4 \text{ km s}^{-1}$  (Figure 15). As soon as you click **Display** again, the green tick corresponding to the HI line moves right under the second fainter line in the HST spectrum. This confirms that this line is associated to this Seyfert 1 galaxy.

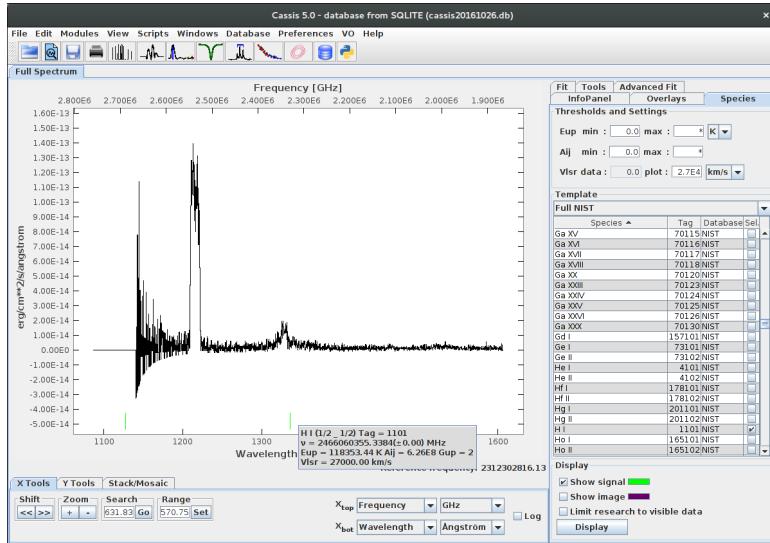


Figure 15: HI line of the Seyfert 1 galaxy.

## 11 Fit a gaussian and a continuum to the hydrogen line

- Focus on a small portion of the spectrum, centred on the HI line of the Seyfert 1 galaxy and fit the line with a Gaussian profile and a continuum: In the **spectrum analysis** (if necessary open by clicking window, reduce the wavelength range: 1300 to 1375 Angström and click ).
- In the CASSIS main window, select the **Fit** tab and add two components using the **Manage Components** menu: a polynomial baseline and a Gaussian line.
- Change the **degree** of the polynomial to ‘ 0 ’ in order to fit a constant baseline.
- For the Gaussian component, the purple/blue fields should be filled with initial values in order to start the fitting procedure. They can be filled by hand but a useful way of filling them in is: use the middle button of your mouse to click and drag the region of the line or alternatively with a trackpad press both ctrl+alt and click and drag to draw the region. Beware that the Gaussian parameters should stay violet/blue (do not click on any of them) if you want them to fill in automatically. The position of the peak (**x<sub>0</sub>**), its height (**I<sub>0</sub>**) and the width of the line (**FWHM**) are estimated automatically from the selection. This selection, visible in purple/blue on Figure 16, can be erased using the **reset** buttons in **Selections [with middle-click-and-drag]**.
- Click on **Fit current** to perform a fit of the line+baseline. The different components of the fit can be selected or deselected in the **InfoPanel**.
- Go back to the **Fit** panel and note the central wavelength of this line as inferred from the best fit: 1327 Angström.

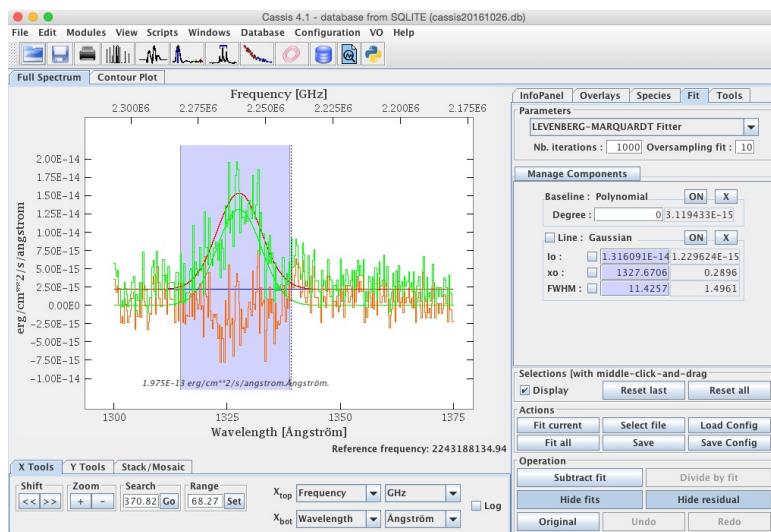


Figure 16: Fit of the spectrum.

- Given that the rest wavelength for the Lyman  $\alpha$  line is 1215.67 Å, the velocity of the galaxy is  $v=c \times \Delta\lambda / \lambda_0 = 27,420 \text{ km s}^{-1}$  or in redshift,  $z=v/c=0.0914$ .
- This value can be compared to the value given in SIMBAD.

## 12 Scripting in a Jupyter notebook [optional]

The tasks in this tutorial can also be carried out using a Jupyter notebook. Go now to

[https://mybinder.org/v2/gh/kathl/VOtutorials\\_with\\_Python/master](https://mybinder.org/v2/gh/kathl/VOtutorials_with_Python/master)

and wait a moment for everything to load. You should then see list of files. Click on the link to

[Abel1656\\_The\\_Coma\\_Cluster\\_of\\_Galaxies.ipynb](#)

and follow the instructions there. You can also download the Jupyter notebook from the github repository to your machine. It was created to run with the packages as listed in the requirements.txt file. Using pip<sup>1</sup> you can install all these packages with the command `pip install [name of the package]`.

---

<sup>1</sup><https://pip.pypa.io/en/stable/>