www.tntextbooks.in

DO YOU KNOW?

ASCII (American Standard Code for Information Interchange) was first developed and published in 1963 by the X3 committee, a part of the American Standards Association (ASA).

String Literals

Sequence of characters enclosed within double quotes are called as String literals. By default, string literals are automatically added with a special character **'\0' (Null)** at the end. Therefore, the string "welcome" will actually be represented as "welcome\0" in memory and the size of this string is not 7 but 8 characters i.e., inclusive of the last character \0.

Valid string Literals : "A", "Welcome" "1234"

Invalid String Literals : 'Welcome', '1234'

Evaluate Yourself

1. What is meant by literals? How many types of integer literals available in C++?
2. What kind of constants are following?
   i) 26 ii) 015 iii) 0xF iv) 014.9
3. What is character constant in C++?
4. How are non graphic characters represented in C++?
5. Write the following real constants into exponent form: i) 32.179 ii) 8.124 iii) 0.00007
6. Write the following real constants into fractional form: i) 0.23E4 ii) 0.517E-3 iii) 0.5E-5
7. What is the significance of null (\0) character in a string?

9.3.4 Operators

The symbols which are used to do some mathematical or logical operations are called as **"Operators".** The data items or values that the operators act upon are called as **"Operands".**

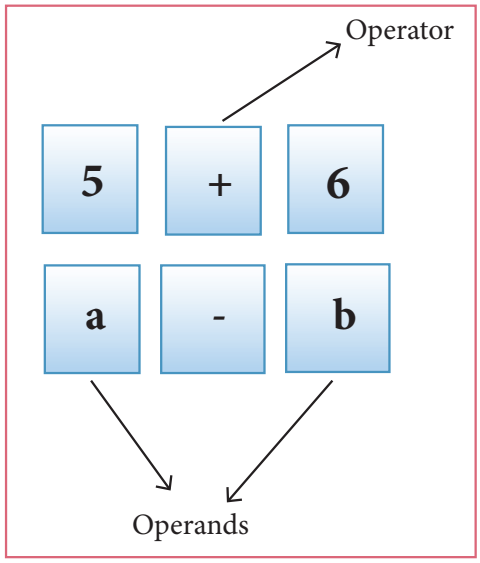

In C++, The operators are classified on the basis of the number of operands.

(i) **Unary Operators** - Require only one operand

(ii) **Binary Operators** - Require two operands

(iii) **Ternary Operators** - Require three operands

C++ Operators are classified as:

(1) Arithmetic Operators

(2) Relational Operators

(3) Logical Operators

(4) Bitwise Operators

(5) Assignment Operators

(6) Conditional Operator

(7) Other Operators