www.tntextbooks.in

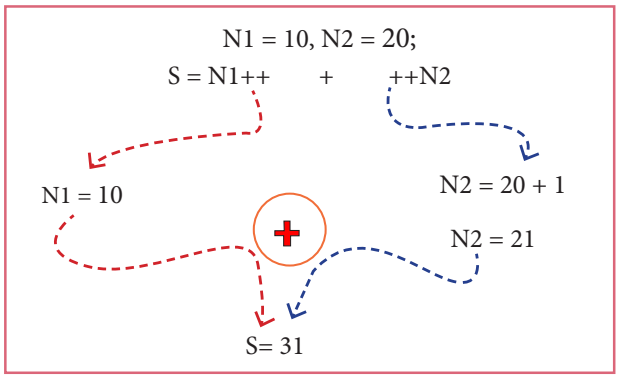

Figure 9.3 Postfix Increment Working process

In the above example, the value assigned to operand N1 is taken into consideration, first and then the value will be incremented by 1.

Operator	Operation	Example (Assume n=2; what will be value of a)	
		Prefix	Postfix
++	Increment	a=++n;	a=n++;
		Value of a = 3	Value of a = 2
--	Decrement	a=--n;	a=n--;
		Value of a=1	Value of a=2

(2) Relational Operators

Relational operators are used to determine the relationship between its operands. When the relational operators are applied on two operands, the result will be a Boolean value i.e 1 or 0 to represents True or False respectively. C++ provides six relational operators. They are,

Operator	Operation	Example
>	Greater than	a > b
<	Less than	a < b
>=	Greater than or equal to	a >= b
<=	Less than or equal to	a <= b
==	Equal to	a == b
!=	Not equal	a != b

- In the above examples, the operand *a* is compared with *b* and depending on the relation, the result will be either 1 or 0. i.e., 1 for true, 0 for false.
- All six relational operators are binary operators.