(5) Assignment Operator:

Assignment operator is used to assign a value to a variable which is on the left hand side of an assignment statement. = (equal to) is commonly used as the assignment operator in all computer programming languages. This operator copies the value at the right side of the operator to the left side variable. It is also a binary operator.

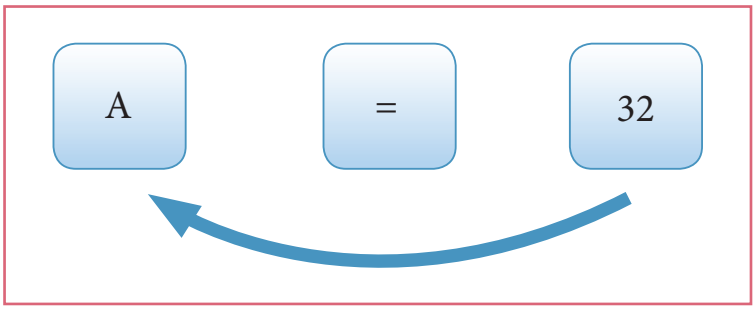

C++ uses different types of assignment operators. They are called as Shorthand assignment operators.

Operator	Name of Operator	Example
+=	Addition Assignment	a = 10; c = a += 5; (ie, a = a + 5) c = 15
-=	Subtraction Assignment	a = 10; c = a -= 5; (ie. a = a – 5) c = 5
*=	Multiplication Assignment	a = 10; c = a *= 5; (ie. a = a * 5) c = 50
/=	Division Assignment	a = 10; c = a /= 5; (ie. a = a / 5) c = 2
%=	Modulus Assignment	a = 10; c = a %= 5; (ie. a = a % 5) c = 0

Discuss the differences between = and == operators

(6) Conditional Operator:

In C++, there is only one conditional operator is used. **?:** is a conditional Operator. This is a Ternary Operator. This operator is used as analternate to if … else control statement. We will learn more about this operator in later chapters along with if …. else structure.