www.tntextbooks.in

Evaluate Yourself

1. What is use of operators?
2. What are binary operators? Give examples arithmetic binary operators.
3. What does the modulus operator % do?
4. What will be the result of 8.5 % 2?
5. Assume that R starts with value 35. What will be the value of S from the following expression? S=(R--)+(++R)
6. What will be the value of j = - - k + 2k. if k is 20 initially ?
7. What will be the value of p = p * ++j where j is 22 and p = 3 initially?
8. Give that i = 8, j = 10, k = 8, What will be result of the following expressions?
   (i) i < k (ii) i < j (iii) i > = k (iv) i = = j (v) j ! = k
9. What will be the order of evaluation for the following expressions?
   (i) i + 3 >= j - 9 (ii) a +10 < p - 3 + 2 q
10. Write an expression involving a logical operator to test, if marks are 75 and grade is 'A'.

9.4 I/O Operators

9.4.1 Input operator:

C++ provides the operator >> to get input. It extracts the value through the keyboard and assigns it to the variable on its right; hence, it is called as **"Stream extraction"** or **"get from"** operator.

It is a binary operator i.e., it requires two operands. The first operand is the pre-defined identifier cin (pronounced as C-In) that identifies keyboard as the input device. The second operand must be a variable.

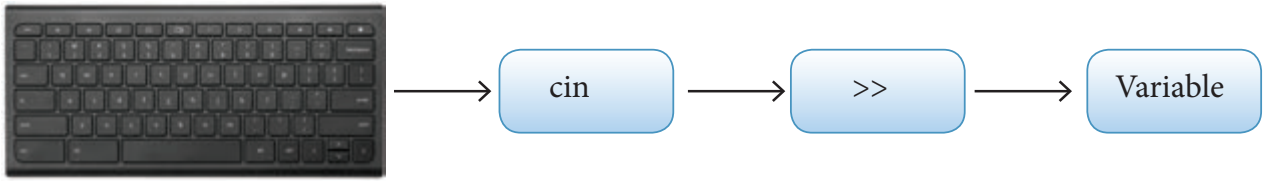


Figure 9.4 Working process of cin