www.tntextbooks.in

To receive or extract more than one value at a time, >> operator should be used for each variable. This is called cascading of operator.

Example:

cin >> num;	Pre-defined object cin extracts a value typed on keyboard and stores it in variable **num.**
cin >>x >> y;	This is used to extract two values. cin reads thefirst value and immediately assigns that to variable x; next, it reads the second value which is typed after a space and assigns that to y. Space is used as a separator for each input.

9.4.2 Output Operator:

C++ provides << operator to perform output operation. The operator << is called the **"Stream insertion"** or **"put to"** operator. It is used to send the strings or values of the variables on its right to the object on its left. << is a binary operator.

The first operand is the pre-defined identifier cout (pronounced as C-Out) that identifies monitor as the standard output object. The second operand may be a constant, variable or an expression.

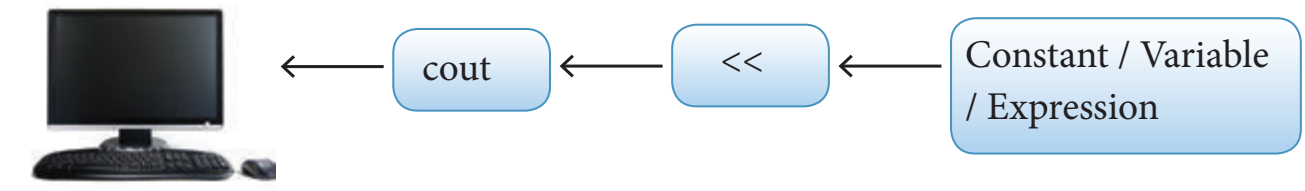

Figure 9.5 Working process of cout

To send more than one value at a time, << operator should be used for each constant/ variable/expression. This is called **cascading of operator**.