www.tntextbooks.in

Example:

cout << “Welcome”;	Pre-defined object cout sends the given string “Welcome” to screen.
cout << “The sum = “ << sum;	First, cout sends the string “The Sum = “ to the screen and then sends the value of the variable sum; Usually, cout sends everything specified within double quotes or single quotes i.e., string or character constants, except non-graphical characters.
cout <<“\n The Area: “ <<3.14*r*r;	First, cout sends everything specified within double quotes except \n to the screen, and then it evaluates the expression 3.14*r*r and sends the result to the screen. \n – is a non graphical character constant to feed a new line.
cout << a + b ;	cout sends the sum of a and b to the output console (monitor)

9.4.3. Cascading of I/O operators

The multiple use of input and output operators such as >> and << in a single statement is known as cascading of I/O operators.

Cascading cout:

```
int Num=20;
cout << “A=” << Num;
```

The Figure 9.6 is used to understand the working of Cascading cout statement

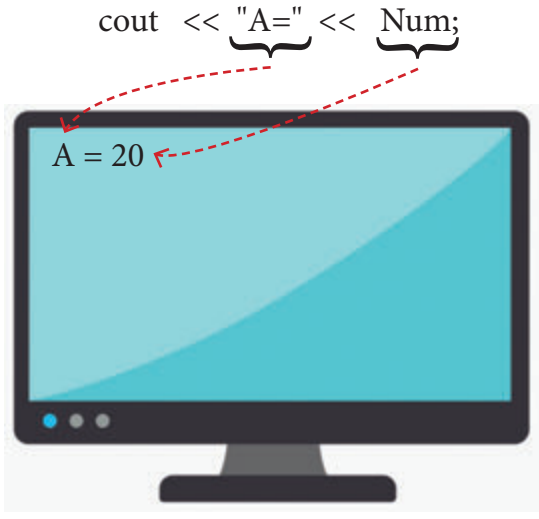

Figure 9.6 Cascading cout