www.tntextbooks.in

unsigned int and unsigned long int, you can use suffix letter **L** or **U** (either case) with 45 i.e. **45L** or **45U**. This type of declaration instructs the compiler to store the given values as long and unsigned. 'F' can be used for floating point values, example: 3.14F

9.13 Variables

Variables are user-defined names assigned to specific memory locations in which the values are stored. Variables are also identifiers; and hence, the rules for naming the identifiers should be followed while naming a variable. These are called as symbolic variables because these are named locations.

There are two values associated with a symbolic variable; they are **R**-value and **L**-value.

- R-value is data stored in a memory location
- L-value is the memory address in which the R-value is stored.

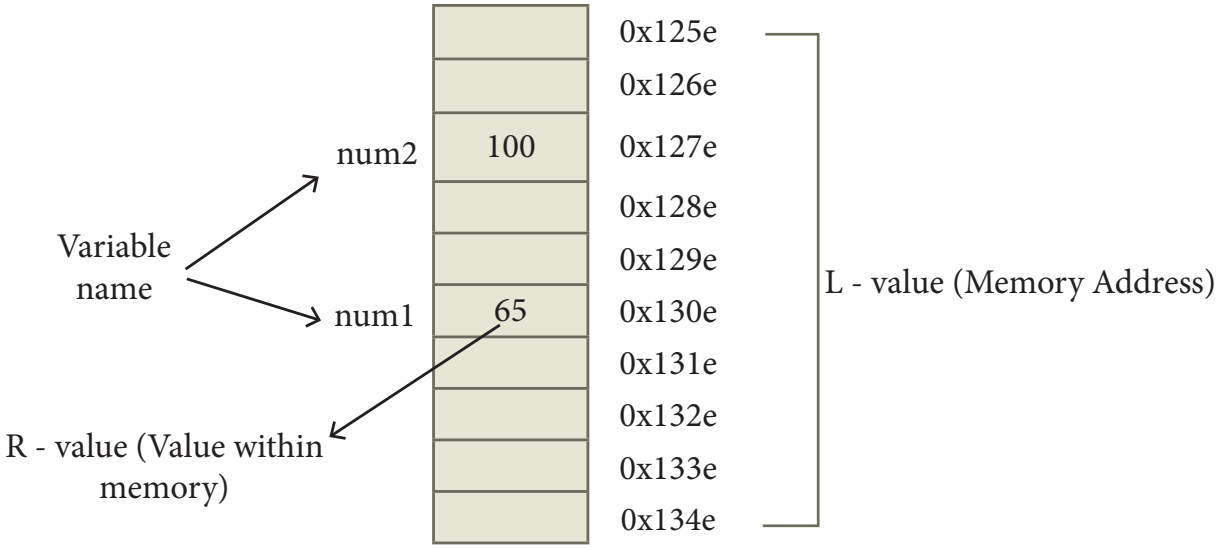

Figure 9.14 Memory allocation of a variable

Remember that, the memory addresses are in the form of Hexadecimal values

9.13.1 Declaration of Variables:

Every variable should be declared before they are actually used in a program. Declaration is a process to instruct the compiler to allocate memory as per the type that is specified along with the variable name. For example, if you declare a variable as int type, in Dev C++, the compiler allocates 4 bytes of memory. Thus, every variable should be declared along with the type of value to be stored.

Declaration of more than one variable:

More than one variable of the same type can be declared as a single statement using a comma separating the individual variables.