www.tntextbooks.in

Syntax:

<data type> <var1>, <var2>, <var3> …… <var_n>;

Example:

int num1, num2, sum;

In the above statement, there are three variables declared as int type. Which means, in **num1, num2** and **sum**, you can store only integer values.

For the above declaration, the C++ compiler allocates 4 bytes of memory (i.e. 4 memory boxes) for each variable.

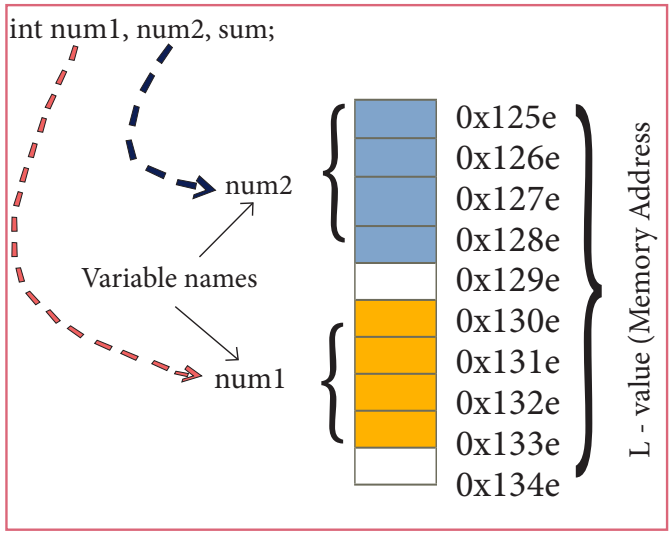

Figure 9.15 Memory allocation of int type variables

If you declare a variable without any initial value, the memory space allocated to that variable will be occupied with some unknown value. These unknown values are called as **"Junk"** or **"Garbage"** values.

```
#include <iostream>
using namespace std;
int main()
{
        int num1, num2, sum;
        cout << num1 << endl;
        cout << num2 << endl;
        cout << num1 + num2;
}
```