www.tntextbooks.in

The output will be,

```
Enter Basic Pay: 12000
Enter D.A : 1250
Enter H.R.A : 1450
                    Basic Pay  :      12000
           Dearness Allowance  :       1250
       House Rent Allowance    :       1450
                    Gross Pay  :      14700
                        G.P.F  :       1325
                   Income Tax  :       1470
                      Net Pay  :      11905
```

(HOT: Try to make multiple output statements as a single cout statement)

In the above program, every output statement has two setw( ) manipulators; first setw (25) creates a filed with 25 spaces and second setw(10) creates another field with 10 spaces. When you represent a value to these fields, it will show the value within the field from right to left.

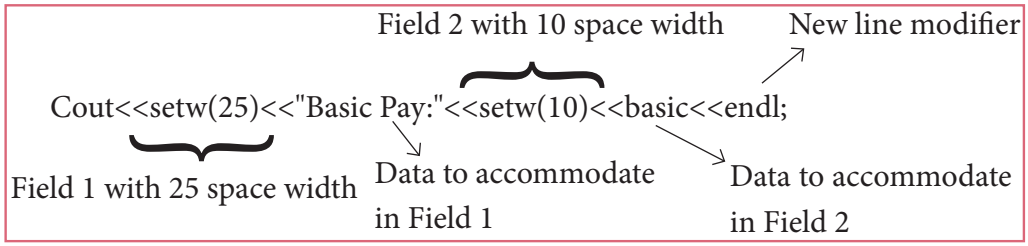

In field1 and field 2, the string "Basic Pay: " and the value of basic pay are shown as given in Figure 9.16 below.

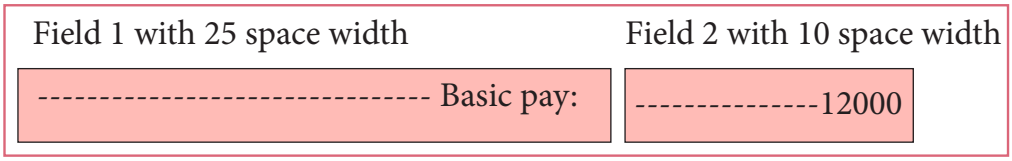

Figure 9.16 setw( ) function

setfill ( )

This manipulator is usually used after setw. If the presented value does not entirely fill the given width, then the specified character in the setfill argument is used for filling the empty fields.