www.tntextbooks.in

```
        cout<<"\nEnter the rate ";
        cin>>rate;
        if ( qty> 500)
        dis=10;
        tot = (qty * rate) - ( qty * rate * dis / 100);
        cout<<"The total expenses is "<< tot;
        return 0;
}
```

Output

```
First Run
Enter the quantity 550
Enter the rate 10
The total expenses is 4950
Second Run
Enter the quantity 450
Enter the rate 10
The total expenses is 4500
```

In the first execution of the program, the test condition evaluates to true, since qty> 500. Therefore, the variable dis which is initialized to 0 at the time of declaration, now gets a new value 10. The total expenses is calculated using a new dis value.

In the second execution of the program, the test condition evaluates to false, since qty> 500. Thus, the variable dis which is initialized to 0 at the time of declaration, remains 0. Hence, the expression after the minus sign evaluates to 0. So, the total expenses is calculated without discount.

Illustration 10.2 C++ program to check whether a person is eligible to vote using if statement
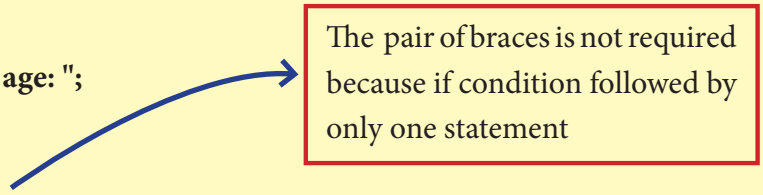
```
#include <iostream>
using namespace std;
int main()
{
        int age;
        cout<< "\n Enter your age: ";
        cin>> age;
        if(age>=18)
                cout<< "\n You are eligible for voting ....";
        cout<< "This statement is always executed.";
        return 0;
}
```