www.tntextbooks.in

```
int i;
for(i = 0; i< 10; i ++ )
        cout<< "value of i : " <<i<<endl;
return 0;
}
```

Output

```
value of i : 0
value of i : 1
value of i : 2
value of i : 3
value of i : 4
value of i : 5
value of i : 6
value of i : 7
value of i : 8
value of i : 9
```

The following lines describes the working of the above given for loop:

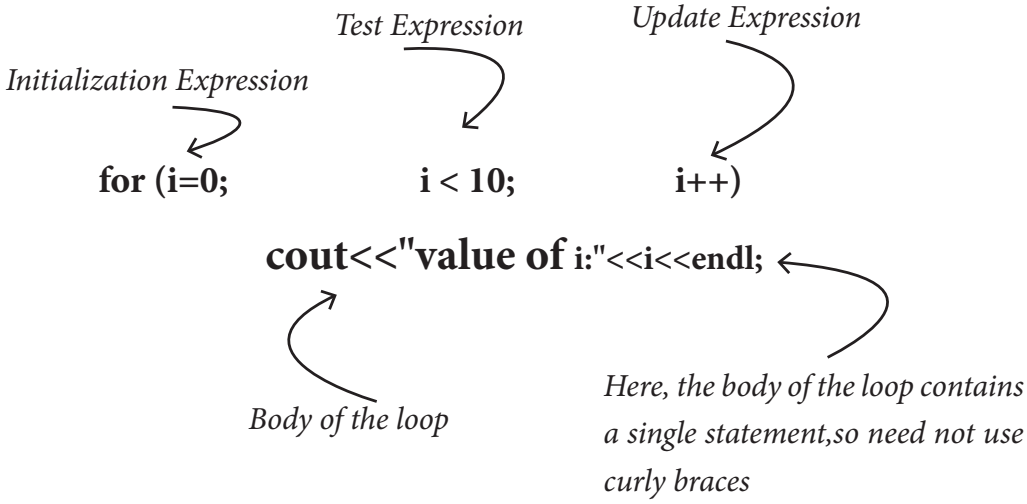

In the above program, first the variable i is initialized, next i is compared with 10, if i is less than ten, the value of i is incremented. In this way, the numbers 0 to 9 are displayed. Once i becomes 10, it is no longer < 10. So, the control comes out of the for loop.