www.tntextbooks.in

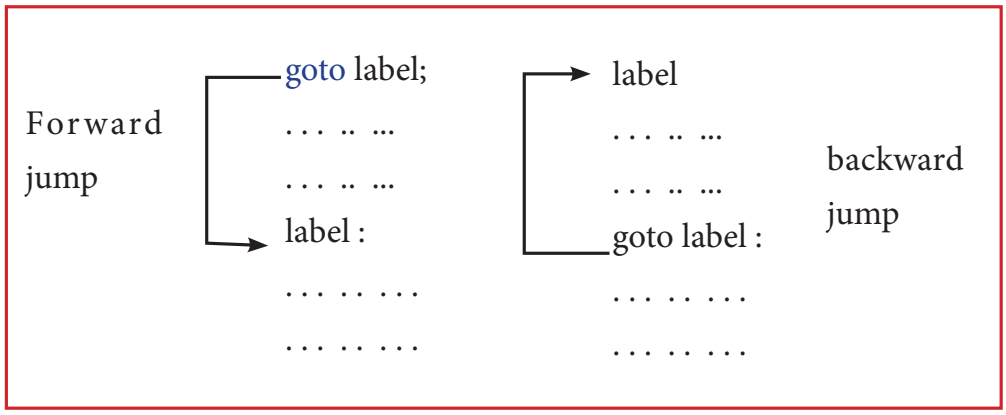

In the syntax above, label is an identifier. When goto label; is encountered, the control of program jumps to label: and executes the code below it.

Illustration 10.18 C++ program to calculate average of given numbers using goto statement

```
# include <iostream>
using namespace std;
int main()
{
float num, average, sum = 0.0;
int i, n;
cout<< "Maximum number of inputs: ";
cin>> n;
for(i = 1; i<= n; ++i)
{
cout<< "Enter n" <<i<< ": ";
cin>>num;
if(num< 0.0)
{
// Control of the program move to jump:
        goto jump;
}
sum += num;
}
jump:
average = sum / (i - 1);
cout<< "\nAverage = " << average;
return 0;
}
```

Output

```
Maximum number of inputs: 5
Enter n1: 10
Enter n2: 20
Enter n3: -2
Average = 15
```