www.tntextbooks.in

Output

```
Count : 0
Count : 1
Count : 2
Count : 3
Count : 4
Count : 5
```

In the above example, while condition specified the loop will iterate 20 times but, as soon as the count reaches 5, the loop is terminated, because of the break statement.

10.6.3 continue statement

The continue statement works quite similar to the break statement. Instead of terminating the loop (break statement), continue statement forces the loop to continue or execute the next iteration. When the continue statement is executed in the loop, the code inside the loop following the continue statement will be skipped and next iteration of the loop will begin.

The following Figure describes the working flow of the continue statement

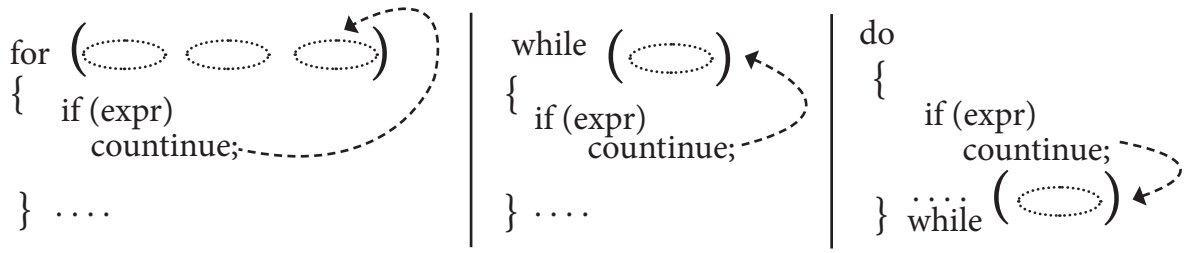

The workflow of the continue statement

Illustraion 10.20 C++ program to display numbers from 1 to 10 except 6 using continue statement

```
#include <iostream>
using namespace std;
 int main()
{
for (int i = 1; i<= 10; i++) {
if (i == 6)
continue;
```