www.tntextbooks.in

11.5.5.1 Formal Parameters and Actual Parameters or Arguments

Arguments or parameters are the means to pass values from the calling function to the called function. The variables used in the function definition as parameters are known as formal parameters. The constants, variables or expressions used in the function call are known as actual parameters.

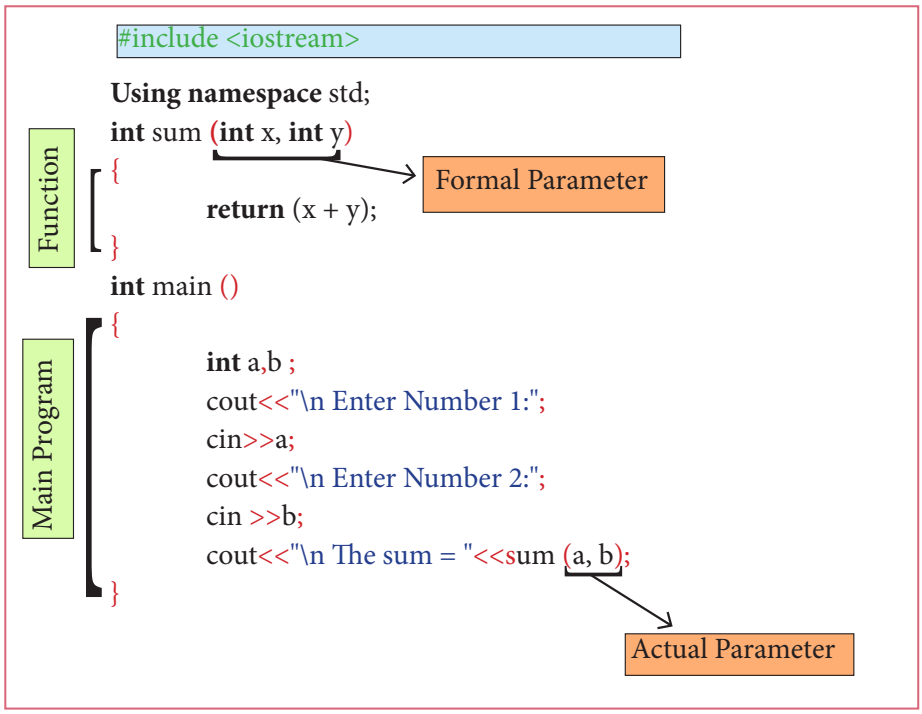

Figure 11.2 Formal and Actual Parameters

11.5.5.2 Default arguments

In C++, one can assign default values to the formal parameters of a function prototype. The Default arguments allows to omit some arguments when calling the function.

When calling a function,

- For any missing arguments, complier uses the values in default arguments for the called function.
- The default value is given in the form of variable initialization.

  Example : **void defaultvalue(int n1=10, n2=100);**
- The default arguments facilitate the function call statement with partial or no arguments.

Example : **defaultvalue(x,y);**

defaultvalue(200,150);

defaultvalue(150);

defaultvalue(x,150);