www.tntextbooks.in

Iteration	i < 4	cin>> age [i];	Value received	age	i++ (i=i+1)
1	4 > 0 (T)	cin>> age[0];	18	age [0] = 18	1
2	4 > 1 (T)	cin>> age[1];	17	age [1] = 17	2
3	4 > 2 (T)	cin>> age[2];	21	age [2] = 21	3
4	4 > 3 (T)	cin>> age[3];	23	age [3] = 23	4
5	4 > 4 (F)	Exit from loop			

After the successful execution of the above statements, the given values will be stored in memory like,

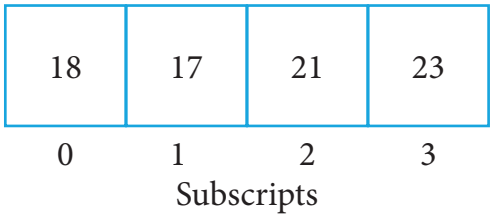

Second for loop:

```
for (int j = 0; j < 4; j++)
        cout<< age[j]<<endl;
```

The above statements are used to read the values from the memory and display the values.

The following table shows the execution of the above code.

Iteration	j< 4	cout << age[j];	values read from memory	Output	j++
1	4 > 0 (T)	cout << age[0];	18	18	1
2	4 > 1 (T)	cout << age[1];	17	17	2
3	4 > 2 (T)	cout << age[2];	21	21	3
4	4 > 3 (T)	cout << age[3];	23	23	4
5	4 > 4 (F)	Exit from loop			

So, the final output will be:

```
Enter the age of four persons:
18
17
21
23
```