www.tntextbooks.in

```
        for(!=0,j=len-1;i<len/2;++i,--j)
        {
        if(a[j]!=a[i])
                        flag=0;
        }

        if(flag==1)
                cout<<"\n The String is palindrome";
        else
                cout<<"\n The String is not palindrome";

        return 0;
}
```

Output:

```
        Enter a string : madam
        The String is palindrome
```

12.3 Two-dimensional array

Two-dimensional (2D) arrays are collection of similar elements where the elements are stored in certain number of rows and columns. An example m × n matrix where m denotes the number of rows and n denotes the number of columns is shown in Figure12.4

int arr[3][3];

2D array conceptual memory representation

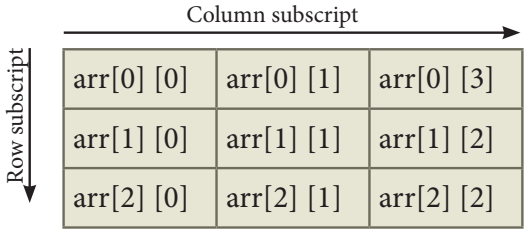

The array arr can be coneptually viewed in matrix form with 3 rows and coloumns. point to be noted here is since the subscript starts with 0 arr [0][0] represents the first element.

Figure 12.4

12.3.1 Declaration of 2-D array

The declaration of a 2-D array is

data-type array_name[row-size][col-size];