www.tntextbooks.in

**Syntax**

**return_type class_name :: function_name (parameter list)**

{

**function definition**

}

For example:

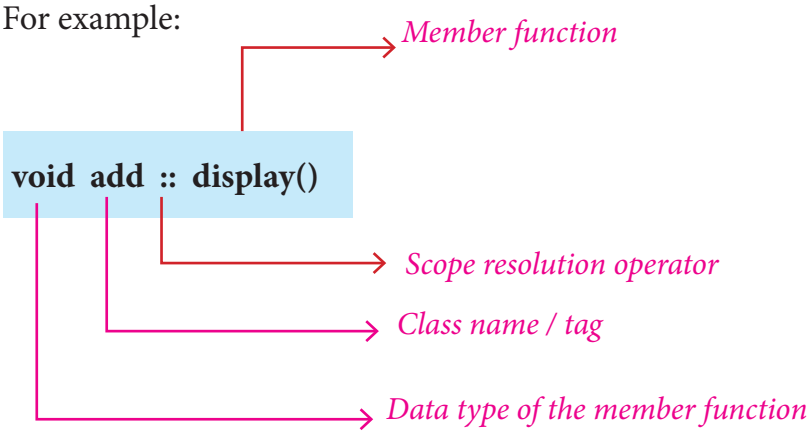


**Illustration 14.1 Inline and Outline member function**

```
# include <iostream>
using namespace std;
class Box
{
        double width;          // no access specifier mentioned
public:
        double length;
void printWidth( )             //inline member function definition
        {
                cout<<"\n The width of the box is..."<<width;
        }
void  setWidth( double w );          //prototype of the function
};
void Box :: setWidth(double w)     // outline member function definition
{
width=w;
}
```

Absence of access specifier means that members are private by default..