www.tntextbooks.in

Operator Overloading Syntax

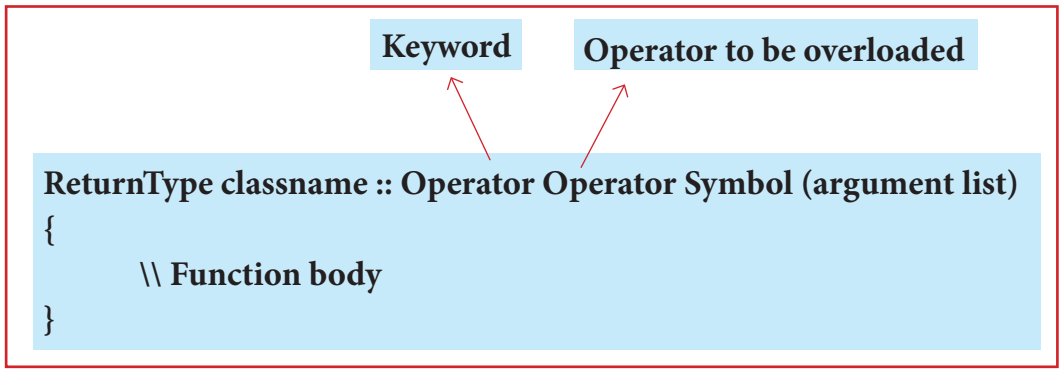

15.4.1 Restrictions on Operator Overloading

Following are some restrictions to be kept in mind while implementing operator overloading.

1. Precedence and Associativity of an operator cannot be changed.
2. No new operators can be created, only existing operators can be overloaded.
3. Cannot redefine the meaning of an operator's procedure. You cannot change how integers are added.Only additional functions can be to an operator
4. Overloaded operators cannot have default arguments.
5. When binary operators are overloaded, the left hand object must be an object of the relevant class

Illustration 15.6 binary operator overloading using '+' and - symbol

```
//Complex number addition and subtraction
#include<iostream>
using namespace std;
class complex
{
int real,img;
public:
void read()
{
cout<<"\nEnter the REAL PART : ";
cin>>real;
cout<<"\nEnter the IMAGINARY PART : ";
cin>>img;
}
```