
```
        gross = basic+da+hra; // sum of basic, da nad hra
        gpf = (basic+da) * 0.10; // 10% 0f basic and da
        tax = gross * 0.10; //10% of gross pay
        np = gross - (gpf+tax); //netpay = earnings - deductions
        cout << setw(25) << "Basic Pay : " << setw(10)<< basic<< endl;
        cout << setw(25) << "Dearness Allowance : "<< setw(10)<<da<< endl;
        cout<<setw(25)<<"House Rent Allowance : "<<setw(10)<< hra<<endl;
        cout << setw(25) << "Gross Pay : " << setw(10) << gross << endl;
        cout << setw(25) << "G.P.F : " << setw(10) << gpf << endl;
        cout << setw(25) << "Income Tax : " << setw(10)<< tax << endl;
        cout << setw(25) << "Net Pay : " << setw(10) << np << endl;
}
```


வெளியீடு:

```
Enter Basic Pay: 12000
Enter D.A : 1250
Enter H.R.A: 1450
                    Basic Pay   :       12000
            Dearness Allowance  :        1250
      House Rent    Allowance   :        1450
                    Gross Pay   :       14700
                    G.P.F       :        1325
                    Income Tax  :        1470
                    Net Pay     :       11905
```

மேலே கொடுக்கப்பட்ட நிரலில், ஒவ்வொரு வெளியீட்டுக் கூற்றும் இரண்டு setw( ) கையாளுகைகளைக் கொண்டுள்ளது. முதலில் கொடுக்கப்பட்டுள்ள setw(25) என்பது 25 இடைவெளிகளைக் கொண்ட ஒரு புலத்தையும், setw(10) என்பது 10 இடைவெளிகளையும் கொண்ட மற்றொரு புலத்தையும் உருவாக்குகின்றது. இப்புலங்களில் மதிப்புகளை இருத்தும் போது, அவை வலமிருந்து இடமாக தோன்றும்.

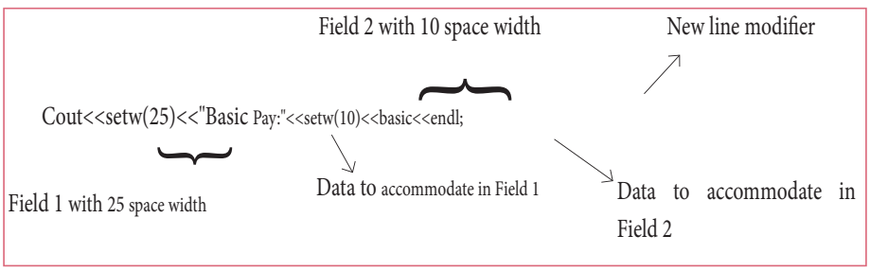

புலம் 1 மற்றும் புலம் 2 –ல் சரம் "Basic Pay: " மற்றும் value of basic pay வின் மதிப்பு

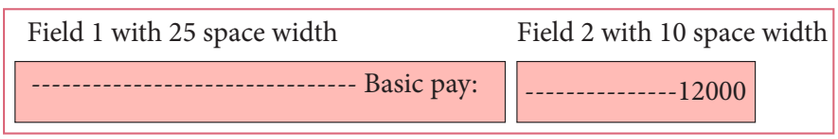

படம் 9.16 setw( ) செயற்கூறு