| | | |
|---|---|---|
| Semicolon ; | Every executable statement in C++ should terminate with a semicolon | int main ( )<br>{<br>int x=10, y=20, sum;<br>sum = x + y;<br>cout << sum;<br>} |
| Colon : | It is used to label a statement. | private: |
| Comments<br>//<br>/* */ | Any statement that begins with // are considered as comments. Comments are simply ignored by compilers. i.e., compiler does not execute any statement that begins with a //<br>**// Single line comment**<br>**/* …….. */ Multiline comment** | **/* This is written by me to learn CPP */**<br>int main ( )<br>{<br>int x=10, y=20, sum;<br>**// to sum x and y**<br>sum = x + y;<br>cout << sum;<br>} |




In C++, one or two operators may be used in different places with different meaning.

For example: Asterisk ( * ) is used for multiplication as well as for pointer to a variable.

## Evaluate Yourself

1. What is the use of operators?
2. What are binary operators? Give examples of arithmetic binary operators.
3. What does the modulus operator % do?
4. What will be the result of 8.5 % 2?
5. Given that i = 8, j = 10, k = 8, What will be result of the following expressions?
   (i) i < k (ii) i < j (iii) i > = k (iv) i = = j (v) j ! = k
6. What will be the order of evaluation for the following expressions?
   (i) i + 3 >= j - 9 (ii) a +10 < p - 3 + 2 q
7. Write an expression involving a logical operator to test, if marks are 75 and grade is 'A'.

## 9.4 I/O Operators

### 9.4.1 Input operator

C++ provides the operator >> to get input. It extracts the value through the keyboard and assigns it to the variable on its right; hence, it is called as **"Stream extraction"** or **"get from"** operator.

It is a binary operator i.e., it requires two operands. The first operand is the pre-defined identifier cin (pronounced as C-In) that identifies keyboard as the input device. The second operand must be a variable.

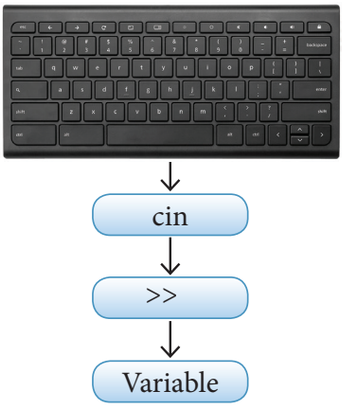



Figure 9.4 Working process of cin

To receive or extract more than one value at a time, >> operator should be used for each variable. This is called cascading of operator.

**Example:**

| | |
|---|---|
| **cin >> num ;** | Pre-defined object cin extracts a value typed on keyboard and stores it in variable **num.** |



11th Std Computer Science_EM Chapter 9.indd 123 06-01-2023 15:08:45