In the syntax above, label is an identifier. When goto label; is encountered, the control of program jumps to label: and executes the code below it.

Illustration 10.14 C++ program to display the first five odd numberts using goto statement

```
# include <iostream>
using namespace std;
int main()
{
int n=1;
jump:
{
 if(n<10)
 { // Control of the program move to jump:
        cout<<n<<'\t';
        n+=2;
        goto jump;
 }
 else
        return 0;
}  }
```

Output

1 3 5 7 9

In the above program the first five odd numbers are displayed.if n is is less than 10 goto transfers the control to jump statement .If n is greater than 10 the control comes out of the loop.

10.6.2 break statement

A break statement is a jump statement which terminates the execution of loop and the control is transferred to resume normal execution after the body of the loop. The following Figure. shows the working of break statement with looping statements;

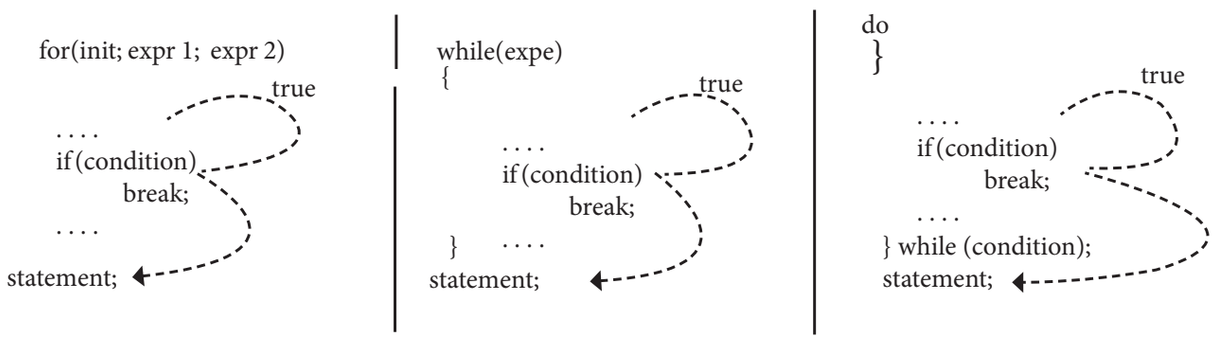

break statement in for, while and do-while loop

11th Std Computer Science_EM Chapter 10.indd 174 06-01-2023 15:09:57