Illustration 10.15 C++ program to count N numbers using break statement

```
#include <iostream>
using namespace std;
int main ()
{
int count = 1;
do
{
cout<< "Count : " << count <<endl;
if( count >= 3)
 {
        break;
  }
count ++;
}while( count < 20 );
return 0;
}
```

Output

```
Count : 1
Count : 2
Count : 3
```

In the above example, the while loop will iterate for 20 times, but as soon as the count reaches 3, the loop is terminated, because of the break statement.

10.6.3 continue statement

The continue statement works quite similar to the break statement. Instead of terminating the loop (break statement), continue statement forces the loop to continue or execute the next iteration. When the continue statement is executed in the loop, the code inside the loop following the continue statement will be skipped and next iteration of the loop will begin.

The following Figure describes the working flow of the continue statement

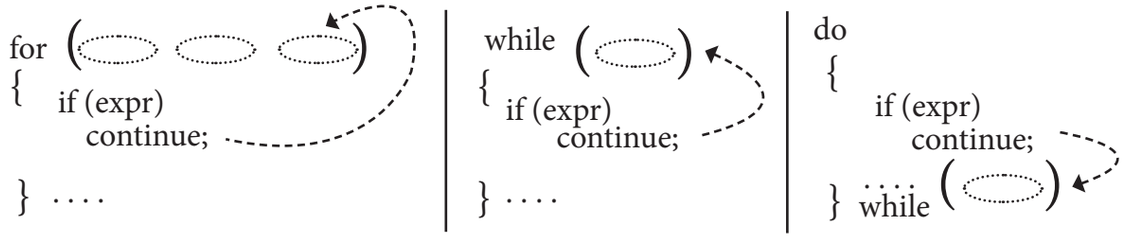

The workflow of the continue statement

In the above example, the loop will iterate 10 times but, if i reaches 6, then the control is transferred to for loop, because of the continue statement.

11th Std Computer Science_EM Chapter 10.indd 175 06-01-2023 15:09:57