
12.4.1 Initialization

For example

char Name[6][10] = {"Mr. Bean", "Mr.Bush", "Nicole", "Kidman", "Arnold", "Jodie"};

In the above example, the 2-D array is initialized with 6 strings, where each string is a maximum of 9 characters long, since the last character is null.

The memory arrangement of a 2-D array is shown below and all the strings are stored in continuous locations.

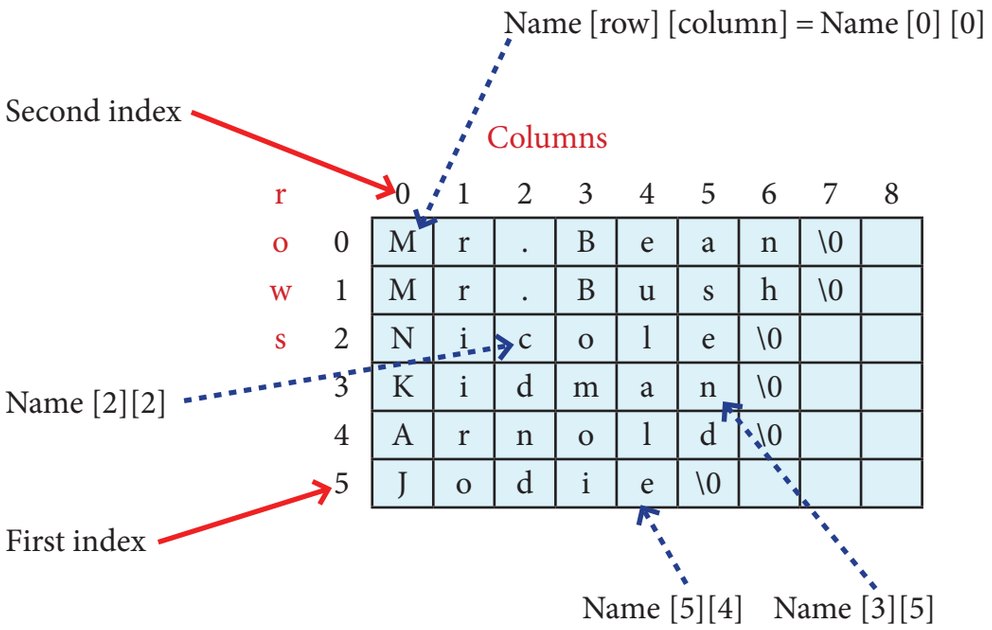

C++ program to demonstrate array of strings using 2-D character array

```
#include<iostream>
using namespace std;
int main( )
{
        // initialize 2d array
        char colour [4][10]={"Blue","Red","Orange",
                             "yellow"};

        // printing strings stored in 2d array
        for (int i=0;  i <4; i++)
        cout  <<  colour [i] << "\n";
}
```

Output:

```
Blue
Red
Orange
Yellow
```


11th Std Computer Science_EM Chapter 12.indd 218 06-01-2023 15:10:42