Syntax

```
return_type class_name :: function_name (parameter list)
{
        function definition
}
```

For example:

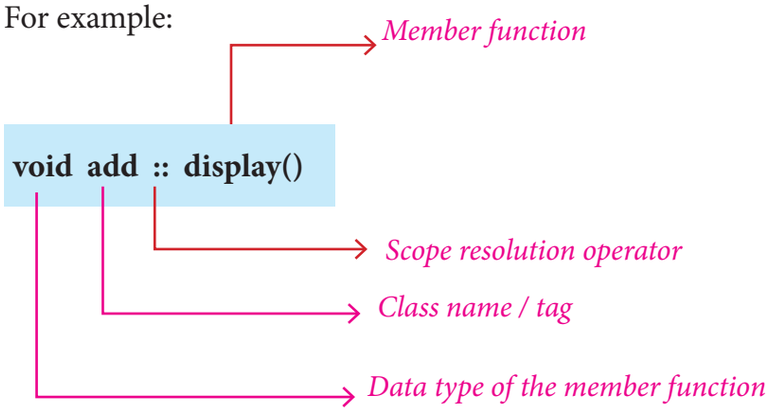


Illustration 14.1 Inline and Outline member function

```
# include <iostream>
using namespace std;
class Box
{
        double width;          // no access specifier mentioned
public:
        double length;
        void printWidth( )              //inline member function definition
        {
                cout<<"\n The width of the box is..."<<width;
        }
        void  setWidth( double w );          //prototype of the function
};
void Box :: setWidth(double w)     // outline member function definition
{
        width=w;
}
int main( )
{
Box b;          // object for class Box
b.setWidth(10.0);     // Use member function to set the width.
b.printWidth( );                //Use member function to print the width.
return 0;
}
```

Absence of access specifier means that members are private by default..

Output:

The width of the box is... 10

11th Std Computer Science_EM Chapter 14.indd 236 06-01-2023 15:11:50