
On execution of the above code the variable ***a*** displays the value 7, because it is defined and available in the local scope.

### 3.4.2 Global Scope

A variable which is declared outside of all the functions in a program is known as global variable. This means, global variable can be accessed inside or outside of all the functions in a program. Consider the following example


| 1. a:=10<br>2. **Disp()**:<br>3. a:=7<br>4. print a<br>5. Disp()<br>6. print a | Entire program<br>  | Output of the Program<br>7<br>10 |
|---|---|---|

On execution of the above code the variable ***a*** which is defined inside the function displays the value 7 for the function call Disp() and then it displays 10, because ***a*** is defined in global scope.

### 3.4.3 Enclosed Scope

All programming languages permit functions to be nested. A function (method) with in another function is called nested function. ***A variable which is declared inside a function which contains another function definition with in it, the inner function can also access the variable of the outer function. This scope is called enclosed scope.***

When a compiler or interpreter search for a variable in a program, it first search Local, and then search Enclosing scopes. Consider the following example
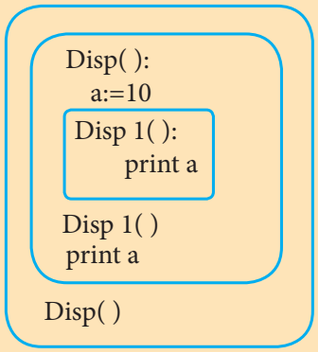
| 1. Disp():<br>2. a:=10<br>3. Disp1():<br>4. print a<br>5. Disp1()<br>6. print a<br>7. Disp() | Entire program<br>  | Output of the Program<br>10<br>10 |
|---|---|---|



12th Computer Science_EM Chapter 3.indd 24 26-12-2022 17:27:47