(iii) Difference

It includes all elements that are in first set (say set A) but not in the second set (say set B)

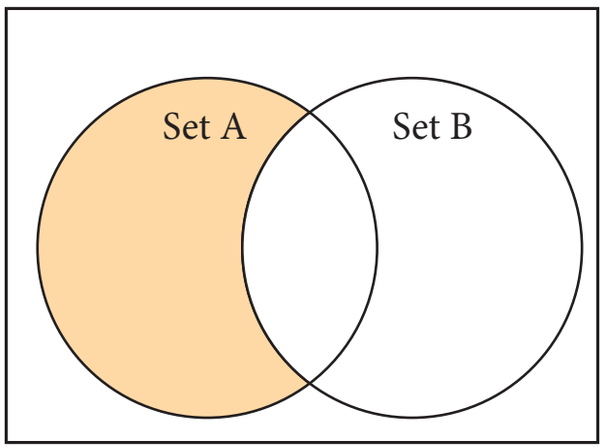

The minus (-) operator is used to difference set operation in python. The function **difference()** is also used to difference operation.

Example: Program to difference of two sets using minus operator

```
set_A={'A', 2, 4, 'D'}
set_B={'A', 'B', 'C', 'D'}
print(set_A - set_B)
```

Output:

{2, 4}

Example: Program to difference of two sets using difference function

```
set_A={'A', 2, 4, 'D'}
set_B={'A', 'B', 'C', 'D'}
print(set_A.difference(set_B))
```

Output:

{2, 4}

12th Computer Science_EM Chapter 9.indd 160 21-12-2022 15:37:03