
On execution of the above code the variable ***a*** displays the value 7, because it is defined and available in the local scope.

3.4.2 Global Scope

A variable which is declared outside of all the functions in a program is known as global variable. This means, global variable can be accessed inside or outside of all the functions in a program. Consider the following example


1. a:=10 2. **Disp()**: 3. a:=7 4. print a 5. Disp() 6. print a	Entire program 	Output of the Program 7 10

On execution of the above code the variable ***a*** which is defined inside the function displays the value 7 for the function call Disp() and then it displays 10, because ***a*** is defined in global scope.

3.4.3 Enclosed Scope

All programming languages permit functions to be nested. A function (method) with in another function is called nested function. ***A variable which is declared inside a function which contains another function definition with in it, the inner function can also access the variable of the outer function. This scope is called enclosed scope.***

When a compiler or interpreter search for a variable in a program, it first search Local, and then search Enclosing scopes. Consider the following example

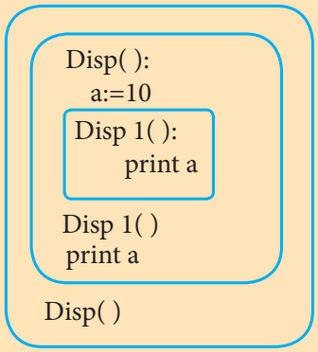1. Disp(): 2. a:=10 3. Disp1(): 4. print a 5. Disp1() 6. print a 7. Disp()	Entire program 	Output of the Program 10 10

12th Computer Science_EM Chapter 3.indd 24 26-12-2022 17:27:47