In the above example Disp1() is defined with in Disp(). The variable 'a' defined in Disp() can be even used by Disp1() because it is also a member of Disp().

3.4.4 Built-in Scope

Finally, we discuss about the widest scope. The built-in scope has all the names that are pre-loaded into the program scope when we start the compiler or interpreter. Any variable or function which is defined in the modules of a programming language has Built-in or module scope. They are loaded as soon as the library files are imported to the program.

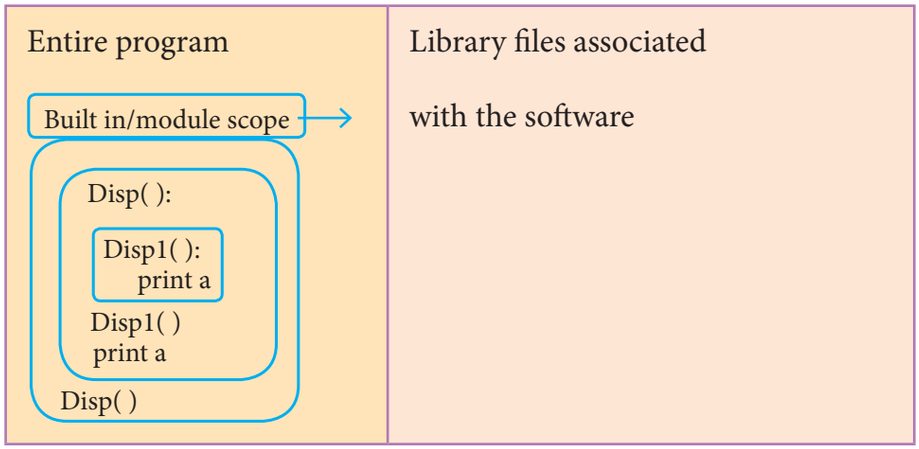

Normally only Functions or modules come along with the software, as packages. Therefore they will come under Built in scope.

3.5 Module

A module is a part of a program. Programs are composed of one or more independently developed modules. A single module can contain one or several statements closely related each other. Modules work perfectly on individual level and can be integrated with other modules. A software program can be divided into modules to ease the job of programming and debugging as well. A program can be divided into small functional modules that work together to get the output. The process of subdividing a computer program into separate sub-programs is called Modular programming. Modular programming enables programmers to divide up the work and debug pieces of the program independently. The examples of modules are procedures, subroutines, and functions.

3.5.1 Characteristics of Modules

The following are the desirable characteristics of a module.

1. Modules contain instructions, processing logic, and data.
2. Modules can be separately compiled and stored in a library.
3. Modules can be included in a program.
4. Module segments can be used by invoking a name and some parameters.
5. Module segments can be used by other modules.

12th Computer Science_EM Chapter 3.indd 25 26-12-2022 17:27:47