The syntax for a table created with constraint is given as below:

```
CREATE TABLE <table-name>
(<column name><data type>[<size>]<column constraint>,
<column name><data type>[<size>]<column constraint>……
<table constraint>(<column name>,[<column name>….]…..
);
```


Following is an example for student table with **"NOT NULL"** column constraint. This constraint enforces a field to always contain a value.

```
CREATE TABLE Student
(
Admno integer    NOT NULL PRIMARY KEY, → Primary Key constraint
Name char(20)  NOT NULL,
Gender char(1),
Age integer,
Place char(10),
);
```

The above command creates a table "student" in which the field Admno of integer type is defined NOT NULL, Name of char type is defined as NOT NULL which means these two fields must have values. The fields Gender, Age and Place do not have any constraints.

12.7.2 Type of Constraints

Constraints ensure database integrity, therefore known as database integrity constraints. The different types of constraints are :

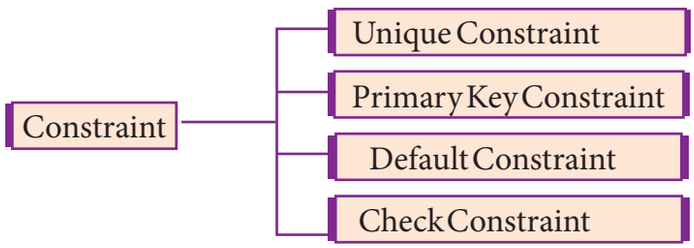

12.7.2.1 Unique Constraint

This constraint ensures that no two rows have the same value in the specified columns. For example **UNIQUE** constraint applied on Admno of student table ensures that no two students have the same admission number and the constraint can be used as:

12th Computer Science_EM Chapter 12.indd 205 22-12-2022 11:54:47