## Example

```
import matplotlib.pyplot as plt
# Our data
labels = ["TAMIL", "ENGLISH", "MATHS", "PHYSICS", "CHEMISTRY", "CS"]
usage = [79.8, 67.3, 77.8, 68.4, 70.2, 88.5]
# Generating the y positions. Later, we'll use them to replace them with labels.
y_positions = range (len(labels))
# Creating our bar plot
plt.bar (y_positions, usage)
plt.xticks (y_positions, labels)
plt.ylabel ("RANGE")
plt.title ("MARKS")
plt.show()
```

## Output

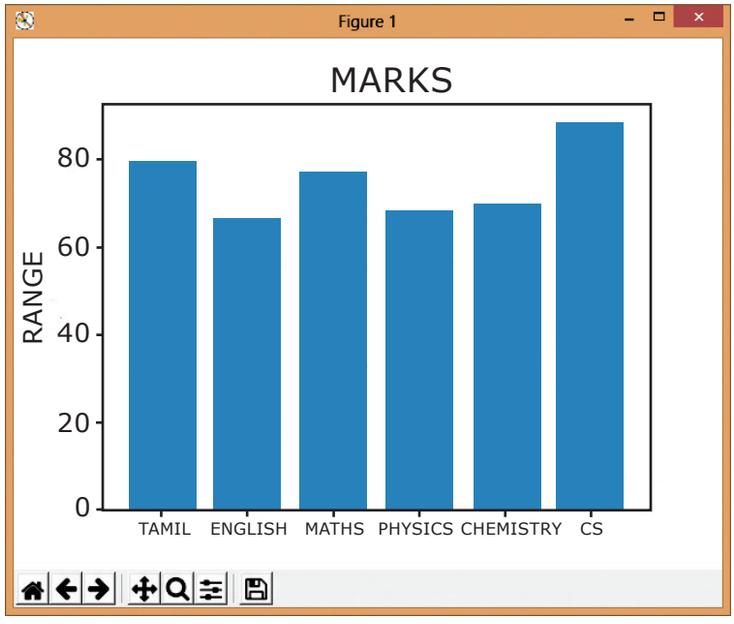



*Figure 16.6*

The above code represents the following:

Labels → Specifies labels for the bars.

Usgae → Assign values to the labels specified.

Xticks → Display the tick marks along the x-axis at the values represented. Then specify the label for each tick mark.

Range → Create sequence of numbers.



12th Computer Science_EM Chapter 16.indd 314 23-12-2022 11:35:37