

INF 212

ANALYSIS OF PROG. LANGS.

INTERACTIVITY

Prof. Crista Lopes

Interactivity



- Program continually receives input and updates its state
- Opposite of batch processing

Batch processing



```
dataIn = getInput()  
dataOut = process(dataIn)  
display(dataOut)
```

Event loop



state


while (True)

 event = eventSource.getNextEvent()

 process(event)

 render(state)

Event loop handled by framework

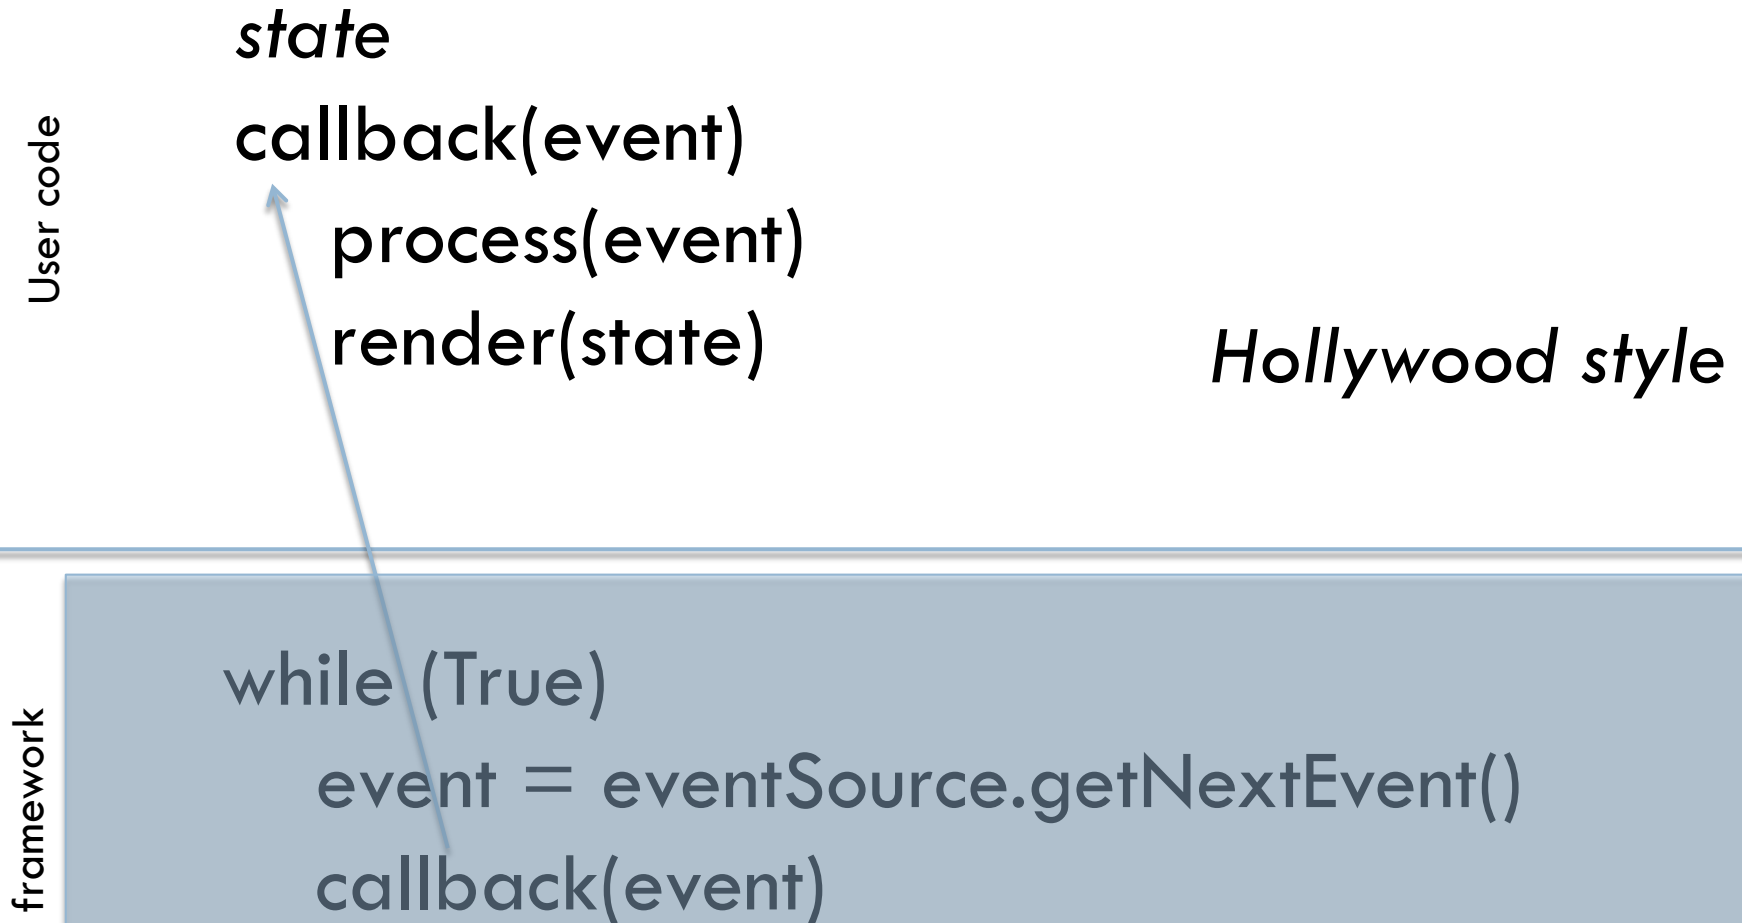

Issues

- How to manage internal state and external views
- How to deal with application “memory”
 - ▣ Behavior that depends on history
- These are unique to interactive applications



Model-View-Controller

MVC

MVC Trinity

- Model
 - ▣ Represents the application's data and logic
- View
 - ▣ Represents a specific rendition of the model
- Controller
 - ▣ Provides input controls for populating/updating the model and for invoking the right view
- Objects/functions belong to only one of these

Term Frequency v1 – Model

```
class WordFrequenciesModel:
    """ Models the data. In this case, we're only interested
    in words and their frequencies as an end result """
    freqs = {}

    def __init__(self, path_to_file):
        self.update(path_to_file)

    def update(self, path_to_file):
        try:
            stopwords = set(open('../stop_words.txt').read().split(','))
            words = re.findall('[a-z]{2,}', open(path_to_file).read().lower())
            self.freqs = collections.Counter(w for w in words if w not in stopwords)
        except IOError:
            print "File not found"
            self.freqs = {}
```

Term Frequency v1 – View

```
class WordFrequenciesView:
    def __init__(self, model):
        self._model = model

    def render(self):
        sorted_freqs = sorted(self._model.freqs.iteritems(), \
                               key=operator.itemgetter(1), reverse=True)
        for (w, c) in sorted_freqs[:25]:
            print w, '-', c
```

Term Frequency v1 – Controller

```
class WordFrequencyController:
    def __init__(self, model, view):
        self._model, self._view = model, view
        view.render()


    def run(self):
        while True:
            print "Next file: "
            sys.stdout.flush()
            filename = sys.stdin.readline().strip()
            self._model.update(filename)
            self._view.render()
```

Passive vs. Active

□ Passive MVC


- Controller is driver of both model & view updates

- (Previous example)

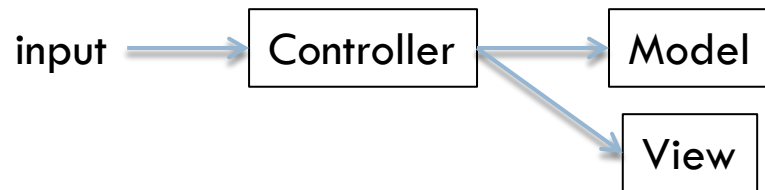


□ Active MVC

- View(s) updated automatically when model changes

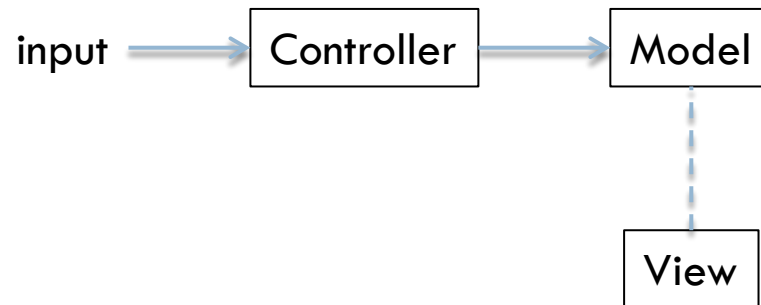


Active MVC

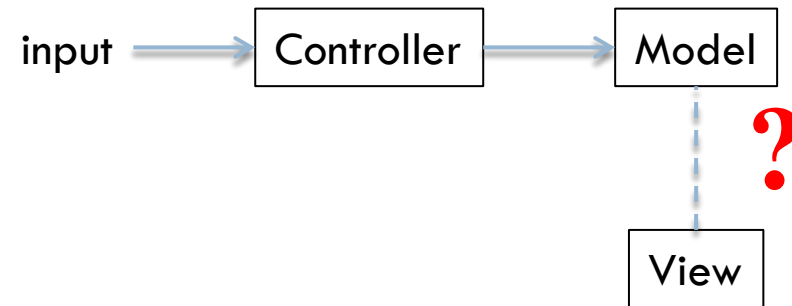


Active MVC – the wrong way

- Model holds references to views
 - ▣ Calls them when it changes

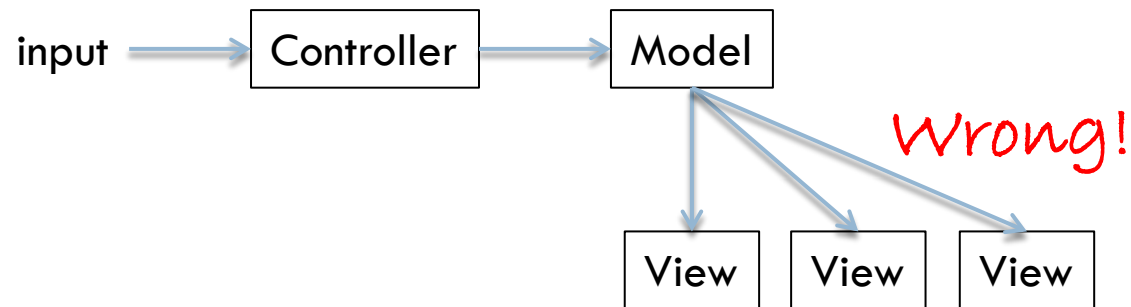


Active MVC – better

- Views hold references to model
 - ▣ Observe periodically
 - ▣ Free agents style

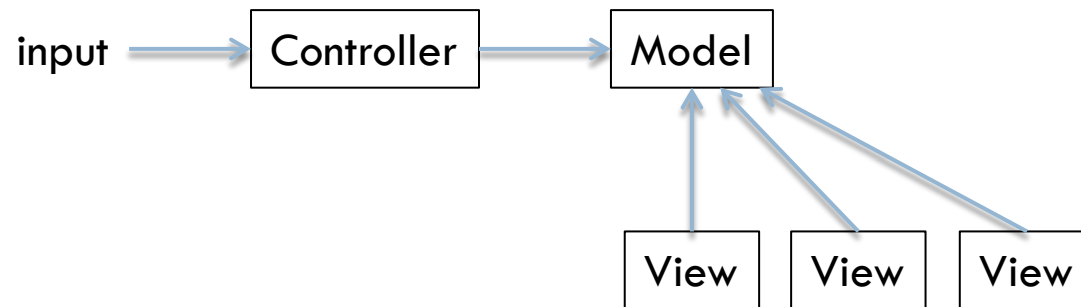

Active MVC – better

- Model is a “subject” that accepts “observers”
 - ▣ Calls them when it changes
 - ▣ Hollywood style (“I’ll call you back”)

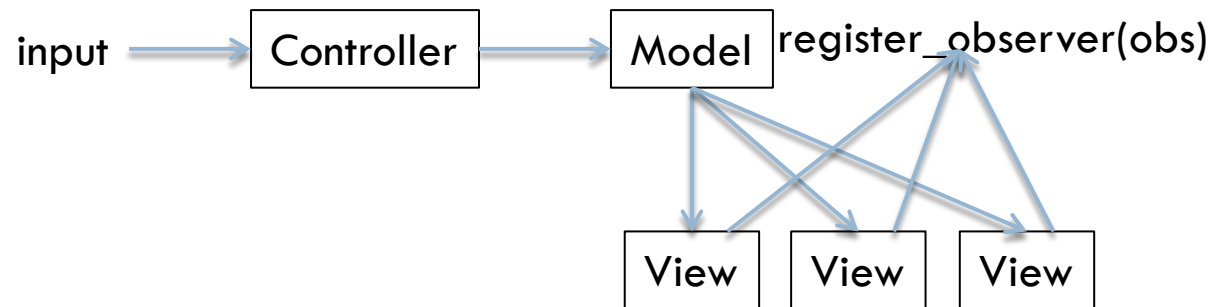

MVC



- MVC can happen at several scales
- Separation sometimes is difficult

REST

Interesting ideas for how to deal with application “memory”

Recap

□ HTTP

- URLs
- Methods
- Headers
- Status Codes
- Caches
- Cookies

□ HTML and HTTP

- hrefs/imgs
- Forms
- Scripts (XMLHttpRequest)

HTML and HTTP

- Links and images
 - `<link href="mystyle.css" rel="stylesheet" type="text/css" />`
 - ``
 - Semantics: Embedded Retrieval → GET
- Anchors
 - `Anchor text`
 - Semantics: Potential Retrieval → GET
- Forms
 - `<form action=URI method=OP>`
input fields
`</form>`
 - Semantics: OP = Potential Retrieval → GET | Potential Creation → POST
- Scripts
 - `<script type="text/javascript">`
script statements
`</script>`
 - JavaScript has the capability of invoking HTTP operations on servers programmatically

First Web Programs

- GET `http://example.com/file.html`



- GET `http://example.com/program.py?arg=3`
(or POST)

- Web server needs to recognize files extensions and react appropriately
- Common Gateway Interface (CGI) model

First Web Programs – CGI

- A standard (see [RFC3875: CGI Version 1.1](#)) that defines how web server software can delegate the generation of webpages to a console application.
- Console app can be written in any PL
 - ▣ CGI programs generate HTML responses
 - ▣ First CGI programs used Perl
- 1993

First Web Programs – PHP

- Natural extension of CGI/Perl, 1994
- Embedded scripting language that helped Perl

```
#!/usr/local/bin/perl

print "Content-type: text/html\n\n";
print "<html>\n<head>";
print "<title>Test</title>\n";
print "</head>\n<body>\n";
print "Hello, world!\n";
print "</body>\n</html>";
```

helloworld.pl

```
<html>
<head>
  <title>Test</title>
</head>
<body>
  <?php echo "Hello World";?>
</body>
</html>
```

helloworld.php

Web Programming

- It all went down hill from here
 - ▣ 1995-2000: a lot of bad programming styles
- Generalized confusion about how to use HTTP
 - ▣ HTTP reduced to GET and POST
 - ▣ HTTP reduced to POST (!) in some models

REST

- REpresentational SState TTransfer
 - Explanation of HTTP 1.1 (for the most part)
 - Style of writing distributed applications
 - “Story” that guides the evolution of Web standards
-
- Formulated by 2000, Roy Fielding (UCI/ICS)

The importance of REST

- Late-90's HTTP seen as
 - ▣ just convenient mechanism
 - ▣ just browser clients
 - ▣ not good enough for server-server interactions
- Ad-hoc use, generalized confusion
 - ▣ GET, POST, PUT ... what's the difference?
- People started mapping other styles onto it
 - ▣ e.g. RPC, SOAP
- HTTP got no respect/understanding until REST was formulated

HTTP vs. REST

- REST is the conceptual story
- HTTP is an enabler of REST on the Web
- Not every use of HTTP is RESTful
- REST can be realized with other network protocols

- History lessons:
 - ▣ Realization (HTTP) came first, concepts (REST) became clear later
 - ▣ Good concepts are critically important

REST Design Principles

- Client-server / Request-Response
- Stateless
- Uniform interface
- Caching
- Layered
- Code-on-demand

REST in action

```
$ python tf-33.py
  What would you like to do?
  1 - Quit
  2 - Upload file
U> 2
  Name of file to upload?
U> ../pride-and-prejudice.txt

#1: mr - 786

  What would you like to do next?
  1 - Quit
  2 - Upload file
  3 - See next most-frequently occurring word
U> 3


#2: elizabeth - 635

  What would you like to do next?
  1 - Quit
  2 - Upload file
  3 - See next most-frequently occurring word
```

Design Principle: Request-Response

□ Components

- ▣ Servers provide access to resources
- ▣ Clients access the resources via servers

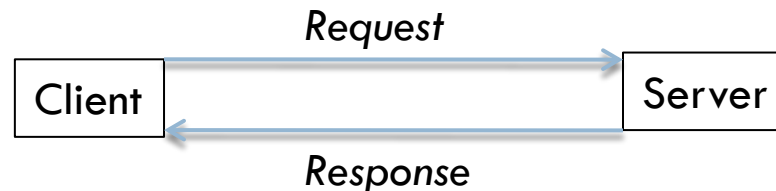

```
request = ["get", "default", None]
while True:
    # "server"-side computation
    state_representation, links = handle_request(*request)
    # "client"-side computation
    request = render_and_get_input(state_representation, links)
```

Design Principle: Uniform Interfaces

- Uniform identification of resources
- Manipulation of resources via representations
- Hypermedia as engine of app state

TF Resources

- Execution
- Default
- File
- Word

TF Uniform Interface

- [verb, resource, [data]]
 - ▣ Verb: get / post
- Representation of resources
 - ▣ Text (menu options) +
Links (possible next operations on resources)




HATEAS

Representations

- Server returns representations of resources, not the resources themselves.
 - ▣ E.g. HTML, XML
- Server response contains all metadata for client to interpret the representation

HATEOAS

- Hypermedia As The Engine Of Application State
- Insight: the application is a state machine
- Wifi example:

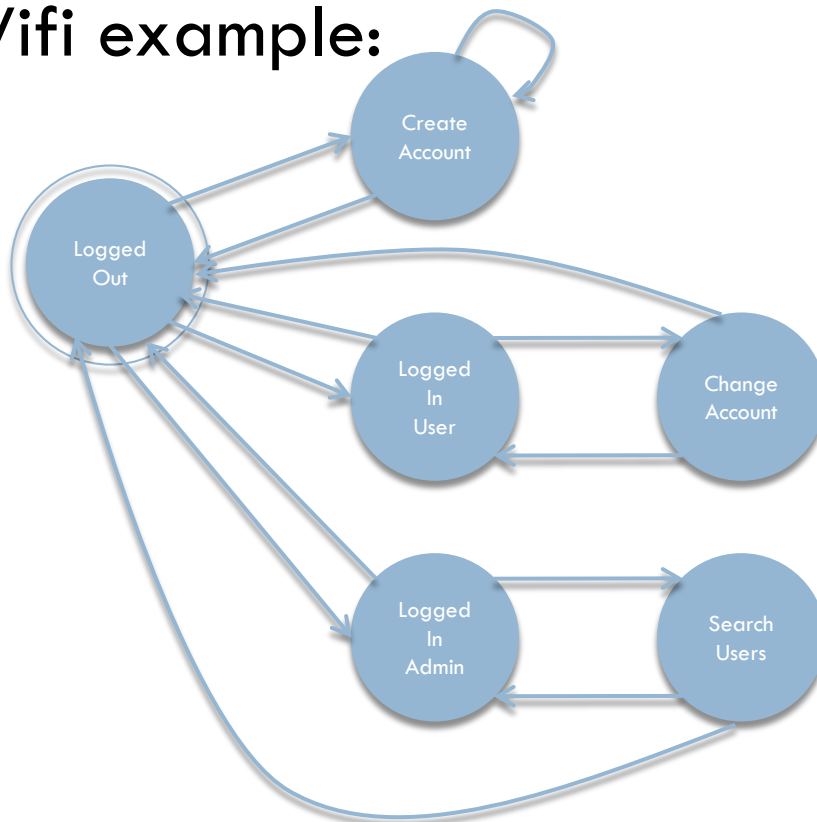


Question is:

Where is the clients' state stored?

...


HATEOAS

- In many systems, clients' state is kept on the server
 - ▣ Traditional way of engineering apps
 - Server is both the state machine and the holder of state
- In REST, state machine is on the server, but clients' state is sent to the clients
 - ▣ At any step, client is sent a complete “picture” of where it can go next

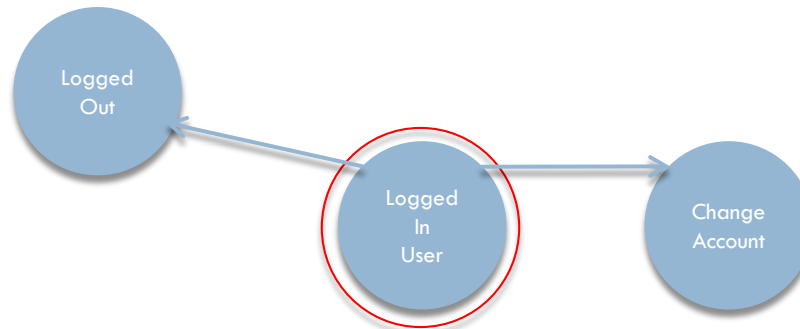

HATEOAS

- Server sends representation of the client's state back to the client
 - ▣ Hence, REpresentational State Transfer
- Server does not “hold on” to client's state
- Possible next state transitions of the client are encoded in Hypermedia
 - ▣ Anchors, forms, scripted actions, eXternal reps

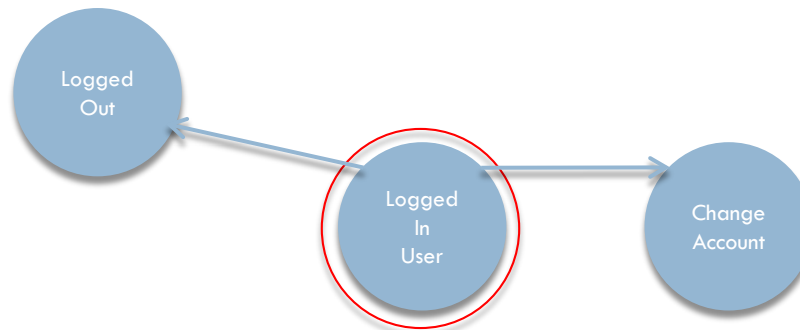


Design Principle: Stateless

- Stateless interaction, not stateless servers
- Stateless interaction:
 - ▣ Messages are self-contained, every message from client to server is independent of prior messages
- Server may create resources (e.g. session info) regarding clients
 - ▣ Critical for real applications
 - ▣ Preferably in DB
- After serving, server does not “hold on”

TF Statelessness

- Memory is sent back to client in hyperlinks

```
60     links = {"1" : ["post", "execution", None],  
61              "2" : ["get", "file_form", None],  
62              "3" : ["get", "word", [filename, word_index+1]]}
```



RESTful Design Guidelines

- Embrace hypermedia
 - ▣ Name your resources/features with URIs
 - ▣ Design your namespace carefully
- Hide mechanisms
 - ▣ **Bad**: `http://example.com/cgi-bin/users.pl?name=John`
 - ▣ **Good**: `http://example.com/users/John`
- Serve POST, GET, PUT, DELETE on those resources
 - ▣ Roughly, Create, Retrieve, Update, Delete (CRUD) life-cycle
- Don't hold on to state
 - ▣ Serve and forget (functional programming-y)
- Consider serving multiple representations
 - ▣ HTML, XML

RESTful Design Guidelines

- URIs are *nouns*
- The 8 HTTP operations are *verbs*

HTTP Operations (recap)

- GET
- PUT
- DELETE
- HEAD
- OPTIONS
- TRACE
- POST
- CONNECT

Idempotent methods

Means: the side effects of many invocations are exactly the same as the side effects of one invocation

See Wikipedia [Idempotent](#)

- [Spec](#)

REST, back to the beginning

- REpresentational State Transfer
 - ▣ Now you really know what this means!
- Explanation of HTTP 1.1 (for the most part)
 - ▣ Much needed conceptual model
- Style of writing distributed applications
 - ▣ Design guidelines
- “Story” that guides the evolution of Web standards
 - ▣ A lighthouse for new ideas