

CHAPTER 7

Lists and Tuples

starting out with >>>

PYTHON®

FOURTH EDITION



TONY GADDIS

Topics

- **Sequences**
- **Introduction to Lists**
- **List Slicing**
- **Finding Items in Lists with the in Operator**
- **List Methods and Useful Built-in Functions**

Topics (cont'd.)

- **Copying Lists**
- **Processing Lists**
- **Two-Dimensional Lists**
- **Tuples**
- **Plotting List Data with the `matplotlib` Package**

Sequences

- **Sequence: an object that contains multiple items of data**
 - The items are stored in sequence one after another
- **Python provides different types of sequences, including lists and tuples**
 - The difference between these is that a list is mutable and a tuple is immutable

Introduction to Lists

- **List**: an object that contains multiple data items
 - Element: An item in a list
 - Format: `list = [item1, item2, etc.]`
 - Can hold items of **different types**
- **print function can be used to display an entire list**


Introduction to Lists (cont'd.)

Figure 7-1 A list of integers



```
even_numbers = [2, 4, 6, 8, 10]
```

Figure 7-2 A list of strings



```
names = ['Molly', 'Steven', 'Will', 'Alicia', 'Adriana']
```

Figure 7-3 A list holding different types



```
names = ['Alicia', 27, 1550.87]
```



`list()` function

- `list()` function can convert certain types of objects to lists
- `range` function returns iterable object
 - A series of values that can be iterated over
- `numbers = list(range(5))`
- `numbers = list(range(1,10,2))`

The Repetition Operator and Iterating over a List

- **Repetition operator**: makes multiple copies of a list and joins them together
 - The `*` symbol is a repetition operator when applied to a sequence and an integer
 - Sequence is left operand, number is right
 - General format: `list * n`
 - `numbers = [1,2,3]`
 - `numbers = [1,2,3] * 5`
 - `numbers = [0] * 5` *//for initialization*
- **You can iterate over a list using a `for` loop**
 - Format: `for x in list:`



Iterating a list using a for loop

```
>>> numbers = [99, 100, 101, 102]
>>> for x in numbers:
    print(x)
```

```
99
100
101
102
```

When did we use the same for loop before?

Indexing

- **Index: a number specifying the position of an element in a list**
 - Enables access to individual element in list
- **Two types of indexing**
 - Zero based Indexing
 - Index of first element in the list is 0, second element is 1, and n'th element is n-1
 - Negative indexes identify positions relative to the end of the list
 - The index -1 identifies the last element, -2 identifies the next to last element, etc.



Forward and Backward Indexing

```
>>> my_list = [10,20,30,40]
>>> print(my_list[0],my_list[1],my_list[2],my_list[3])
10 20 30 40
>>> print(my_list[-1],my_list[-2],my_list[-3],my_list[-4])
40 30 20 10
```

- **What if you specify an invalid index?**
- **An `IndexError` exception is raised if an invalid index is used**

The len function

- len function: returns the length of a sequence such as a list
- The index of last element is `len(list) - 1`

```
....  
>>> my_list = [10,20,30,40]  
• >>> index = 0  
>>> while index < len(my_list):  
    print(my_list[index])  
    index+=1
```

```
10  
20  
30  
40
```

IndexError exception

- If you specify an invalid index, an **IndexError** exception will be thrown

```
>>> my_list = [10,20,30,40]
>>> my_list[4]
Traceback (most recent call last):
  File "<pyshell#29>", line 1, in <module>
    my_list[4]
IndexError: list index out of range
```

Lists Are Mutable

- **Mutable sequence: the items in the sequence can be changed**
 - Lists are mutable, and so their elements can be changed
- **An expression such as**
- **`list[1] = new_value` can be used to assign a new value to a list element**
 - Must use a valid index to prevent raising of an `IndexError` exception

Initializing and filling a list

Initializing a list of size 5

```
>>> #create a list with elements
>>> numbers= [0] *5
>>> # Fill the list with a numbers from 1 to 5
>>> index = 0
>>> while index <len(numbers):
    numbers[index]=index+1
    index+=1
```

```
>>> numbers
[1, 2, 3, 4, 5]
```

Assigning a value to the elements of the list

sales_list.py



Concatenating Lists

- **Concatenate: join two things together**
- **The + operator can be used to concatenate two lists**
 - Cannot concatenate a list with another data type, such as a number
- **The += augmented assignment operator can also be used to concatenate lists**

Concatenating Lists

```
>>> list1=[1,2,3,4]
>>> list2=[5,6,7,8]
>>> list3=list1+list2
>>> list3
[1, 2, 3, 4, 5, 6, 7, 8]
```

```
>>> list1=[1,2,3,4,5]
>>> list2=[6,7,8,9,10]
>>> list1+=list2
>>> list1
[1, 2, 3, 4, 5, 6, 7, 8, 9, 10]
```



List Slicing

- **Slice**: a span of items that are taken from a sequence
 - List slicing format: `list[start : end]`
 - Span is a list containing copies of elements from `start` up to, but not including, `end`
 - If `start` not specified, 0 is used for start index
 - If `end` not specified, `len(list)` is used for end index

List Slicing

```
>>> numbers=[1,2,3,4,5,6,7,8]
>>> print(numbers[3:6])
[4, 5, 6]
>>> print(numbers[3:])
[4, 5, 6, 7, 8]
>>> print(numbers[:6])
[1, 2, 3, 4, 5, 6]
>>> print(numbers[-3:])
[6, 7, 8]
>>> print(numbers[:-4])
[1, 2, 3, 4]
>>> print(numbers[1:-4])
[2, 3, 4]
>>> print(numbers[-4:2])
[]
```



Finding Items in Lists with the `in` Operator

- You can use the `in` operator to determine whether an item is contained in a list
 - General format: `item in list`
 - Returns `True` if the item is in the list, or `False` if it is not in the list
- Similarly you can use the `not in` operator to determine whether an item is not in a list

`in_list.py`



List Methods and Useful Built-in Functions

- `append(item)` : used to add items to a list – *item* is appended to the end of the existing list
`list_append.py`
- `index(item)` : used to determine where an item is located in a list
 - Returns the index of the first element in the list containing `item`
 - **Raises `ValueError` exception if *item* not in the list**

`Index_list.py`



List Methods and Useful Built-in Functions (cont'd.)

- `insert(index, item)`: used to insert *item* at position *index* in the list insert_list.py
- `sort()`: used to sort the elements of the list in ascending order
 - List **must have the same data** types to work
- `remove(item)`: removes the **first occurrence** of *item* in the list remove_item.py
 - Throws a **ValueError** if item is not in the list
- `reverse()`: reverses the order of elements



Table 7-1 A few of the list methods

Method	Description
<code>append(<i>item</i>)</code>	Adds <i>item</i> to the end of the list.
<code>index(<i>item</i>)</code>	Returns the index of the first element whose value is equal to <i>item</i> . A <code>ValueError</code> exception is raised if <i>item</i> is not found in the list.
<code>insert(<i>index</i>, <i>item</i>)</code>	Inserts <i>item</i> into the list at the specified <i>index</i> . When an item is inserted into a list, the list is expanded in size to accommodate the new item. The item that was previously at the specified index, and all the items after it, are shifted by one position toward the end of the list. No exceptions will occur if you specify an invalid index. If you specify an index beyond the end of the list, the item will be added to the end of the list. If you use a negative index that specifies an invalid position, the item will be inserted at the beginning of the list.
<code>sort()</code>	Sorts the items in the list so they appear in ascending order (from the lowest value to the highest value).
<code>remove(<i>item</i>)</code>	Removes the first occurrence of <i>item</i> from the list. A <code>ValueError</code> exception is raised if <i>item</i> is not found in the list.
<code>reverse()</code>	Reverses the order of the items in the list.

Any ideas to sort in descending order?




List Methods and Useful Built-in Functions (cont'd.)

- **del statement:** removes an element from a specific index in a list
 - General format: `del list[i]`
 - Different from `remove` which takes the item itself
- **min and max functions:** built-in functions that returns the item that has the lowest or highest value in a sequence
 - The sequence is passed as an argument
 - Works **only when the list holds same data type**
 - *Variable_name = min(list)*

Copying Lists

Figure 7-4 `list1` and `list2` reference the same list

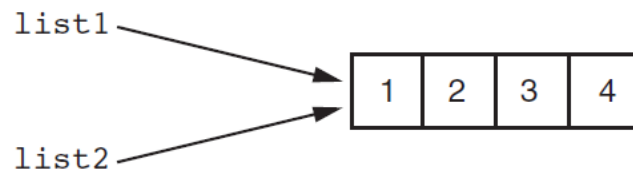

```
>>> list1=[1,2,3,4]
>>> list2=list1
>>> list1[0] = 99
>>> list1
[99, 2, 3, 4]
>>> list2
[99, 2, 3, 4]
```

Copying Lists

- To make a copy of a list you must copy each element of the list
 - Two methods to do this:
 1. Creating a new empty list and using a **for loop** to add a copy of each element from the original list to the new list

```
'''  
>>> list1=[1,2,3,4]  
>>> list2=[]  
>>> for x in list1:  
        list2.append(x)  
  
>>> list2  
[1, 2, 3, 4]
```



Copying Lists

- **To make a copy of a list you must copy each element of the list**
 - 2. Creating a new empty list and **concatenating** the old list to the new empty list

```
>>>  
>>> list1=[1,2,3,4]  
>>> list2 = []+list1  
>>> list2  
[1, 2, 3, 4]  
|
```

Processing Lists

- List elements can be used in calculations
- To calculate total of numeric values in a list use loop with accumulator variable
- To average numeric values in a list:
 - Calculate total of the values `total_list.py`
 - Divide total of the values by `len(list)` `average_list.py`
- List can be passed as an argument to a function

`total_function.py`

Processing Lists (cont'd.)

- **A function can return a reference to a list** [return_list.py](#)
- **To save the contents of a list to a file:**
 - Use the file object's `writelines` method [writelines.py](#)
 - **Drawback:** Does not automatically write `\n` at then end of each item
 - Use a `for` loop to write each element and `\n` [write_list.py](#)
 - Use the file object's `write` method
- **To read data from a file use the file object's `readlines` method** [read_list.py](#)
 - Returns a list
 - What is the difference between `file.read()`, `file.readline`, `file.readlines()`?



Two-Dimensional Lists

- **Two-dimensional list: a list that contains other lists as its elements**
 - Also known as nested list
 - Common to think of two-dimensional lists as having rows and columns
 - Useful for working with multiple sets of data
- **To process data in a two-dimensional list need to use two indexes**
- **Typically use nested loops to process**

Two-Dimensional Lists (cont'd.)

Figure 7-5 A two-dimensional list

	Column 0	Column 1
Row 0	'Joe'	'Kim'
Row 1	'Sam'	'Sue'
Row 2	'Kelly'	'Chris'

```
>>> students=[['Joe','Kim'], ['Sam','Sue'], ['Kelly','Chris']]
>>> students
[['Joe', 'Kim'], ['Sam', 'Sue'], ['Kelly', 'Chris']]
>>> print(students[0])
['Joe', 'Kim']
>>> print(students[0][0])
Joe
```

Two-Dimensional Lists (cont'd.)

Figure 7-7 Subscripts for each element of the `scores` list

	Column 0	Column 1	Column 2
Row 0	<code>scores[0][0]</code>	<code>scores[0][1]</code>	<code>scores[0][2]</code>
Row 1	<code>scores[1][0]</code>	<code>scores[1][1]</code>	<code>scores[1][2]</code>
Row 2	<code>scores[2][0]</code>	<code>scores[2][1]</code>	<code>scores[2][2]</code>

`random_numbers.py`

Tuples

- **Tuple: an immutable sequence**
 - Very similar to a list
 - Once it is created it cannot be changed
 - Format: `tuple_name = (item1, item2)`
 - Tuples support operations as lists
 - Subscript indexing for retrieving elements
 - Methods such as `index`
 - Built in functions such as `len`, `min`, `max`
 - Slicing expressions
 - **The `in`, `+`, and `*` operators**
 - Tuples with one element are created with an additional comma
 - `my_tuple = (1,)` NOT `my_tuple = (1)`



Tuples (cont'd.)

- **Tuples do not support the methods:**
 - `append`
 - `remove`
 - `insert`
 - `reverse`
 - `sort`

Tuples (cont'd.)

- **Advantages for using tuples over lists:**
 - Processing tuples is faster than processing lists
 - Tuples are safe
 - Some operations in Python require use of tuples
- **list() function: converts tuple to list**
- **tuple() function: converts list to tuple**



What is the output?

```
1 >>> #create a tuple
2 >>> tuplex = (4, 6, 2, 8, 3, 1)
3 >>> print(tuplex)
4 >>> #tuples are immutable, so you can not add new elements
5 >>> #using merge of tuples with the + operator you can add an element and it will create a new tuple
6 >>> tuplex = tuplex + (9,)
7 >>> print(tuplex)
8 >>> #adding items in a specific index
9 >>> tuplex = tuplex[:5] + (15, 20, 25) + tuplex[:5]
10 >>> print(tuplex)
11 >>> #converting the tuple to list
12 >>> listx = list(tuplex)
13 >>> #use different ways to add items in list
14 >>> listx.append(30)
15 >>> tuplex = tuple(listx)
16 >>> print(tuplex)
```

Sample Output:

```
(4, 6, 2, 8, 3, 1)
(4, 6, 2, 8, 3, 1, 9)
(4, 6, 2, 8, 3, 15, 20, 25, 4, 6, 2, 8, 3)
(4, 6, 2, 8, 3, 15, 20, 25, 4, 6, 2, 8, 3, 30)
```



Plotting Data with `matplotlib`

- The `matplotlib` package is a library for creating two-dimensional charts and graphs.
- It is not part of the standard Python library, so you will have to install it separately, after you have installed Python on your system.

Plotting Data with matplotlib

- To install `matplotlib` on a Windows system, open a Command Prompt window and enter this command:

```
pip install matplotlib
```

- To install `matplotlib` on a Mac or Linux system, open a Terminal window and enter this command:

```
sudo pip3 install matplotlib
```

- See Appendix F in your textbook for more information about packages and the `pip` utility.

Plotting Data with matplotlib

```
C:\Users\kxr051>pip install matplotlib
Collecting matplotlib
  Downloading matplotlib-2.0.2-cp36-cp36m-win32.whl (8.7MB)
    100% |████████████████████████████████████████| 8.7MB 126kB/s
Collecting numpy>=1.7.1 (from matplotlib)
  Downloading numpy-1.13.3-2-cp36-none-win32.whl (6.8MB)
    100% |████████████████████████████████████████| 6.8MB 176kB/s
Collecting pyparsing!=2.0.4,!=2.1.2,!=2.1.6,>=1.5.6 (from matplotlib)
  Downloading pyparsing-2.2.0-py2.py3-none-any.whl (56kB)
    100% |████████████████████████████████████████| 61kB 4.1MB/s
Collecting python-dateutil (from matplotlib)
  Downloading python_dateutil-2.6.1-py2.py3-none-any.whl (194kB)
    100% |████████████████████████████████████████| 194kB 3.2MB/s
Collecting cyclar>=0.10 (from matplotlib)
  Downloading cyclar-0.10.0-py2.py3-none-any.whl
Collecting pytz (from matplotlib)
  Downloading pytz-2017.2-py2.py3-none-any.whl (484kB)
    100% |████████████████████████████████████████| 491kB 1.9MB/s
Collecting six>=1.10 (from matplotlib)
  Downloading six-1.11.0-py2.py3-none-any.whl
Installing collected packages: numpy, pyparsing, six, python-dateutil, cyclar, pytz, matplotlib
Successfully installed cyclar-0.10.0 matplotlib-2.0.2 numpy-1.13.3 pyparsing-2.2.0 python-dateutil-2.6.1 pytz-2
017.2 six-1.11.0
```



Plotting Data with matplotlib

- To verify the package was installed, start IDLE and enter this command:

```
>>> import matplotlib
```

- If you don't see any error messages, you can assume the package was properly installed.


Plotting Data with `matplotlib`

- The `matplotlib` package contains a module named `pyplot` that you will need to import.
- Use the following `import` statement to import the module and create an alias named `plt`:

```
import matplotlib.pyplot as plt
```

Plotting a Line Graph with the `plot` Function


- Use the **`plot` function** to create a line graph that connects a series of points with straight lines.
- The line graph has a horizontal *X* axis, and a vertical *Y* axis.
- Each point in the graph is located at a (*X*, *Y*) coordinate.

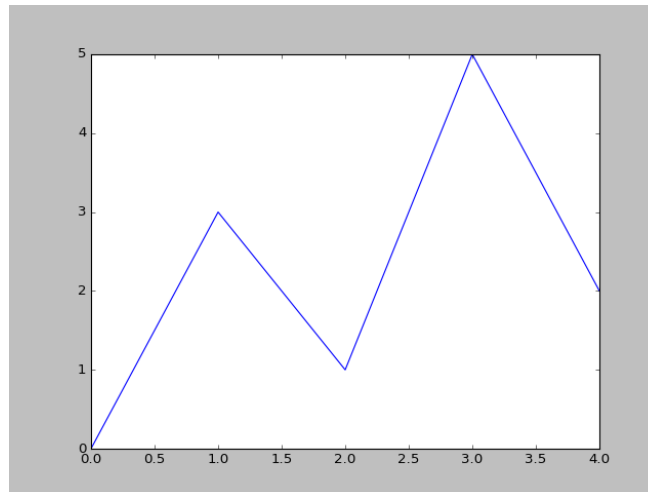

Plotting a Line Graph with the `plot` Function

line_graph1.py

```
1 # This program displays a simple line graph.
2 import matplotlib.pyplot as plt
3
4 def main():
5     # Create lists with the X and Y coordinates of each data point.
6     x_coords = [0, 1, 2, 3, 4]
7     y_coords = [0, 3, 1, 5, 2]
8
9     # Build the line graph.
10    plt.plot(x_coords, y_coords)
11
12    # Display the line graph.
13    plt.show()
14
15 # Call the main function.
16 main()
```

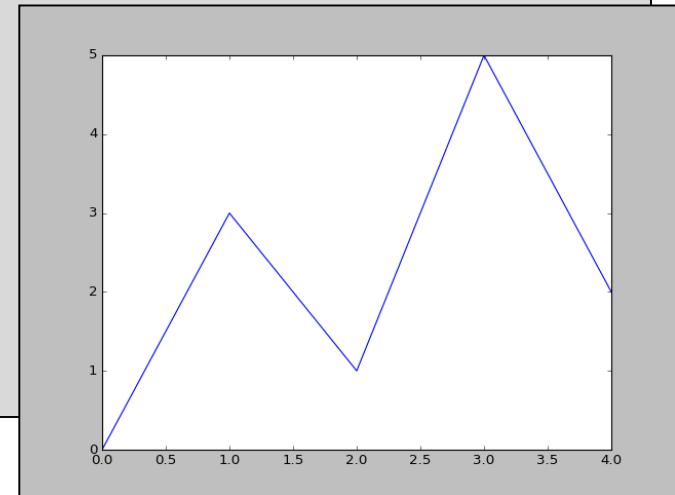

Plotting a Line Graph with the `plot` Function

- **Adding title, Axis labels and a Grid**

```
# Add a title.  
plt.title('Sample Data')  
  
# Add labels to the axes.  
plt.xlabel('This is the X axis')  
plt.ylabel('This is the Y axis')  
  
# Add a grid.  
plt.grid(True)
```

line_graph2.py



Plotting a Line Graph with the `plot` Function

- You can change the lower and upper limits of the *X* and *Y* axes by calling the `xlim` and `ylim` functions.

Example:

```
plt.xlim(xmin=1, xmax=100)  
plt.ylim(ymin=10, ymax=50)
```

- **This code does the following:**
 - Causes the *X* axis to begin at 1 and end at 100
 - Causes the *Y* axis to begin at 10 and end at 50

line_graph3.py



Plotting a Line Graph with the `plot` Function

- You can customize each tick mark's label with the `xticks` and `yticks` functions.
- These functions each take two lists as arguments.
 - The first argument is a list of tick mark locations
 - The second argument is a list of labels to display at the specified locations.

```
plt.xticks([0, 1, 2, 3, 4],  
           ['2016', '2017', '2018', '2019', '2020'])  
plt.yticks([0, 1, 2, 3, 4, 5],  
           ['$0m', '$1m', '$2m', '$3m', '$4m', '$5m'])
```

line_graph4.py




Output of Program 7-24

Displayed by the
`yticks()` function.

Displayed by the
`title()` function.

Displayed by the
`ylabel()` function.

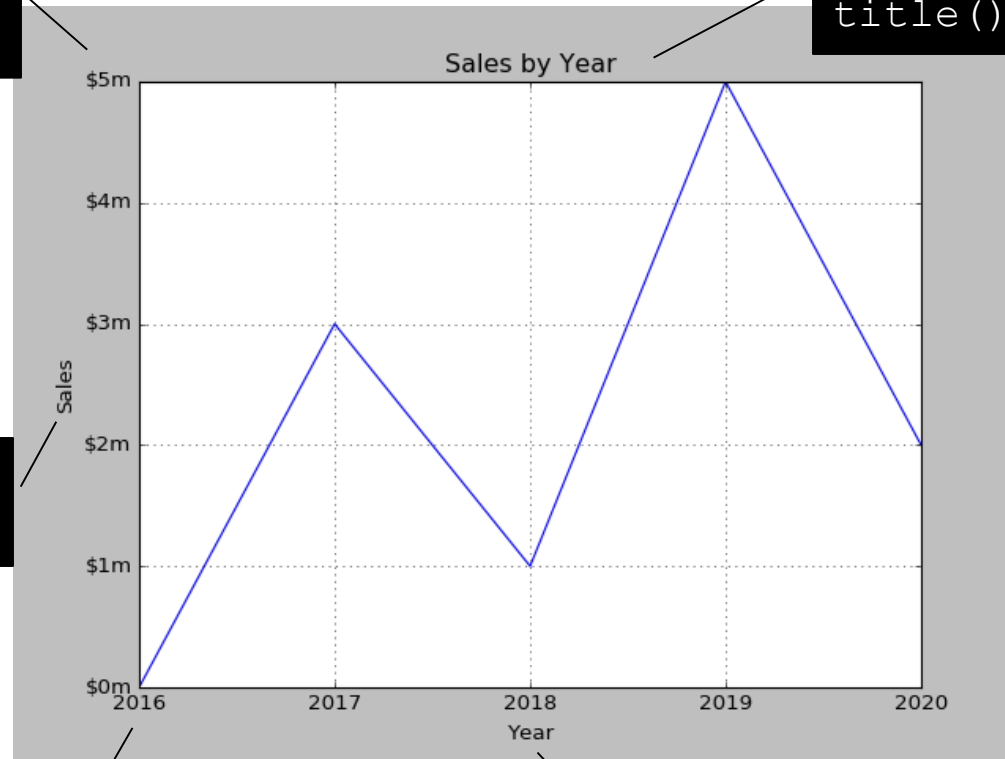

Displayed by the
`xticks()` function.

Displayed by the
`xlabel()` function.



Plotting a Bar Chart


- Use the **bar function** in the `matplotlib.pyplot` module to create a bar chart.
- The function needs two lists: one with the *X* coordinates of each bar's left edge, and another with the heights of each bar, along the *Y* axis.

Plotting a Bar Chart

```
left_edges = [0, 10, 20, 30, 40]  
heights = [100, 200, 300, 400, 500]
```

```
plt.bar(left_edges, heights)  
plt.show()
```

bar_chart1.py

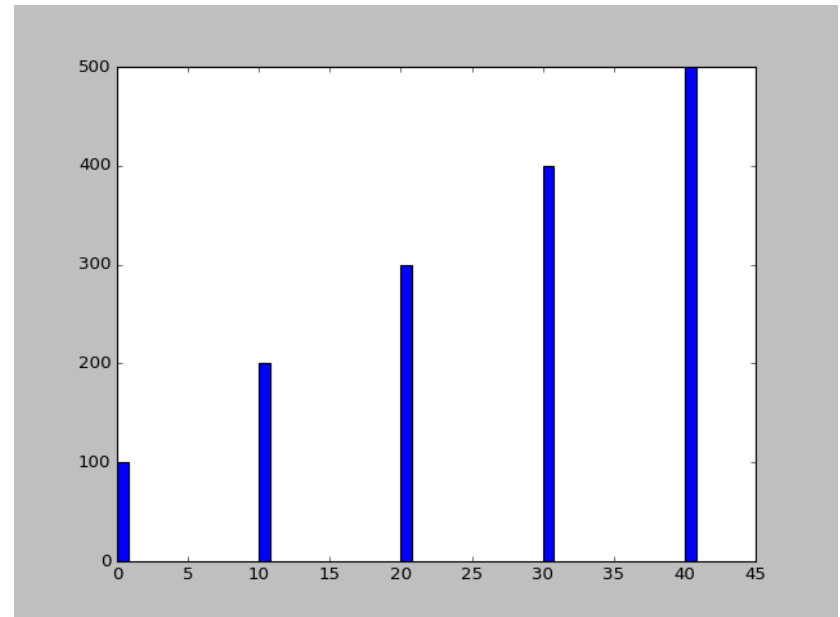


Plotting a Bar Chart

- The default width of **each** bar in a bar graph is 0.8 along the *X* axis.
- You can change the bar width by passing a third argument to the `bar` function.

```
left_edges = [0, 10, 20, 30, 40]
heights = [100, 200, 300, 400, 500]
bar_width = 5

plt.bar(left_edges, heights, bar_width)
plt.show()
```

bar_chart2.py

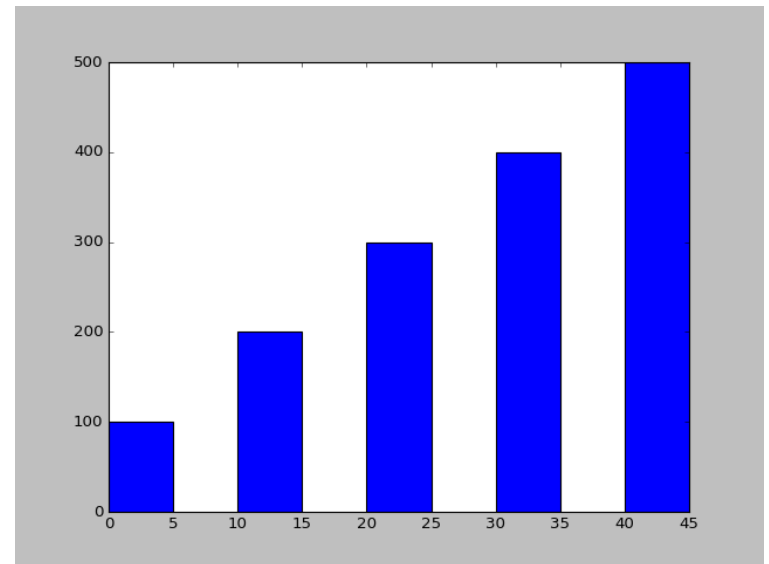

Plotting a Bar Chart

- The `bar` function has a `color` parameter that you can use to change the colors of the bars.
- The argument that you pass into this parameter is a tuple containing a series of color codes.

Color Code	Corresponding Color
'b'	Blue
'g'	Green
'r'	Red
'c'	Cyan
'm'	Magenta
'y'	Yellow
'k'	Black
'w'	White



Plotting a Bar Chart

- **Example of how to pass a tuple of color codes as a keyword argument:**

```
plt.bar(left_edges, heights, color=('r', 'g', 'b', 'w', 'k'))
```

- **The colors of the bars in the resulting bar chart will be as follows:**
 - The first bar will be red.
 - The second bar will be green.
 - The third bar will be blue.
 - The fourth bar will be white.
 - The fifth bar will be black.

bar_chart3.py

Plotting a Bar Chart

- Use the `xlabel` and `ylabel` functions to add labels to the *X* and *Y* axes.
- Use the `xticks` function to display custom tick mark labels along the *X* axis
- Use the `yticks` function to display custom tick mark labels along the *Y* axis.


Plotting a Pie Chart

- You use the **pie function** in the `matplotlib.pyplot` module to create a pie chart.
- When you call the `pie` function, you pass a list of values as an argument.
 - The sum of the values will be used as the value of the whole.
 - Each element in the list will become a slice in the pie chart.
 - The size of a slice represents that element's value as a percentage of the whole.

Plotting a Pie Chart

- **Example**

```
values = [20, 60, 80, 40]  
plt.pie(values)  
plt.show()
```

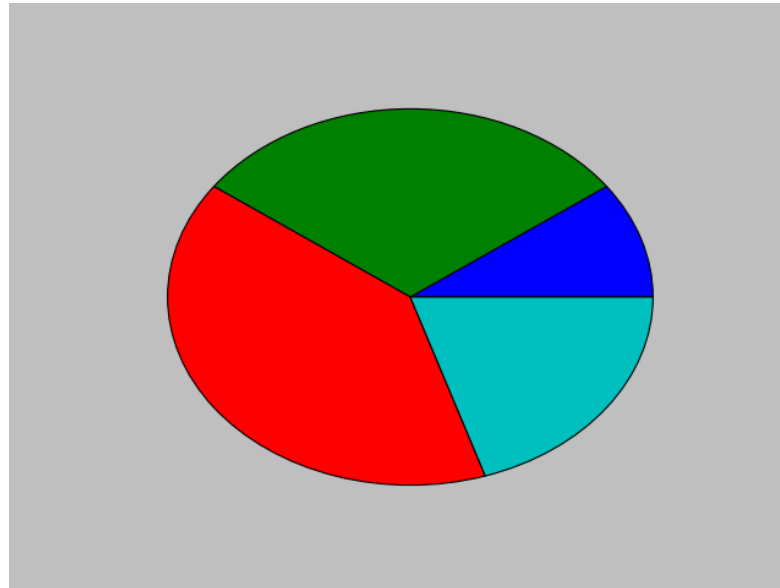

pie_chart1.py




Plotting a Pie Chart

- The `pie` function has a `labels` parameter that you can use to display labels for the slices in the pie chart.
- The argument that you pass into this parameter is a list containing the desired labels, as strings.

Plotting a Pie Chart

- **Example**

```
sales = [100, 400, 300, 600]
slice_labels = ['1st Qtr', '2nd Qtr', '3rd Qtr', '4th Qtr']
plt.pie(sales, labels=slice_labels)
plt.title('Sales by Quarter')
plt.show()
```

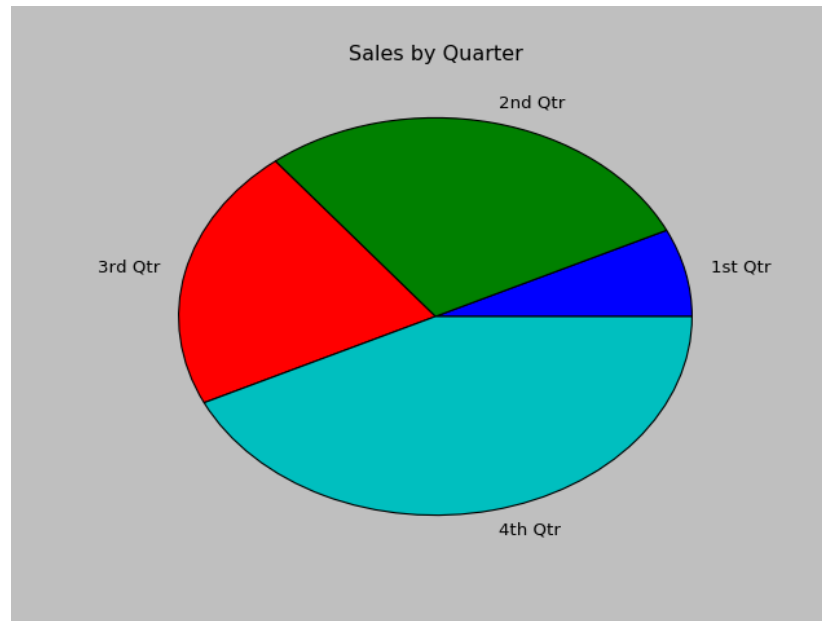

pie_chart2.py



Plotting a Pie Chart

- The `pie` function automatically changes the color of the slices, in the following order:
 - blue, green, red, cyan, magenta, yellow, black, and white.
- You can specify a different set of colors, however, by passing a tuple of color codes as an argument to the `pie` function's `colors` parameter:

```
plt.pie(values, colors=('r', 'g', 'b', 'w', 'k'))
```

- When this statement executes, the colors of the slices in the resulting pie chart will be red, green, blue, white, and black.

Summary

- **This chapter covered:**
 - Lists, including:
 - Repetition and concatenation operators
 - Indexing
 - Techniques for processing lists
 - Slicing and copying lists
 - List methods and built-in functions for lists
 - Two-dimensional lists
 - Tuples, including:
 - Immutability
 - Difference from and advantages over lists
 - Plotting charts and graphs with the **matplotlib** Package

