

# Empirical Analysis of the Role of Energy in Economic Growth

Caleb Reese<sup>a</sup>, Lucas Timmer<sup>a</sup>, Matthew Kuperus Heun<sup>a,\*</sup>

<sup>a</sup>*Engineering Department, Calvin College, Grand Rapids, MI 49546, USA*

---

## Abstract

\*\*\*\*\* Add abstract \*\*\*\*\*

*Keywords:* economic growth, energy, cobb-douglas, CES, LINEX

---

```
fileName <- "data/USData.txt"

# Read the data file as a table with a header.
## dataTable is a poor name. Name it after contents, unless this is the
## start of a script where this will be provided at the command line.
dataTable <- read.table(fileName, header = TRUE)

# Identifies the header names associated with dataTable
names(dataTable)

[1] "Year"
[2] "GDP.Millionsofreal2005USdollars."
[3] "Labour.Millionsofhoursworked."
[4] "CapitalStock.Millionsofreal2005USdollars."
[5] "Thermalenergy.TJ."
[6] "Exergy.TJ."
[7] "UsefulWork.TJ."
[8] "iYear"
[9] "iGDP"
```

---

\*Corresponding author

*Email address:* mkh2@calvin.edu, tel: +1 (616) 526-6663, fax: +1 (616) 526-6501 (Matthew Kuperus Heun )

```
[10] "iLabor"
[11] "iCapStk"
[12] "iQ"
[13] "iX"
[14] "iU"
```

## 1. Cobb-Douglas Without Energy

```
# Establish guess values for alpha and lambda.
lambdaGuess <- 0.0 # guessing lambda = 0 means there is no technological progress.
alphaGuess <- 0.3 # a typical value for alpha, the coefficient on capital stock

# Runs a non-linear least squares fit to the data. We've replaced beta with 1-alpha
modelCD <- nls(iGDP ~ exp(lambda*iYear) * iCapStk^alpha * iLabor^(1 - alpha),
               start=(list(lambda=lambdaGuess,alpha=alphaGuess)),
               data=dataTable)

# Checks validity of the model. AIC stands for Akaike's Information Criterion.
aicCD <- AIC(modelCD, k=2); aicCD

[1] -163

summaryCD <- summary(modelCD) # Gives the nls summary table.
print(summaryCD)

Formula: iGDP ~ exp(lambda * iYear) * iCapStk^alpha * iLabor^(1 - alpha)

Parameters:
      Estimate Std. Error t value Pr(>|t|)
lambda 0.010256   0.000682   15.03 1.7e-15
alpha  0.270030   0.028311    9.54 1.4e-10

Residual standard error: 0.0178 on 30 degrees of freedom

Number of iterations to convergence: 4
Achieved convergence tolerance: 3.81e-07
```

```

ciCD <- confint(modelCD, level = 0.95); ciCD # Displays confidence intervals for t

Waiting for profiling to be done...

              2.5%   97.5%
lambda 0.008862 0.01164
alpha  0.212405 0.32785

# Calculate beta and its confidence interval and report it.
alpha <- as.numeric(coef(modelCD)["alpha"])
beta <- 1.0 - alpha
beta.est <- deltaMethod(modelCD, "1 - alpha"); beta.est # Estimates beta and its s

              Estimate      SE
1 - alpha      0.73 0.02831

# Now calculate a confidence interval on beta
dofCD <- summaryCD$df[2]; dofCD # Gives the degrees of freedom for the model.

[1] 30

tvalCD <- qt(0.975, df = dofCD); tvalCD

[1] 2.042

betaCICD <- with(beta.est, Estimate + c(-1.0, 1.0) * tvalCD * SE); betaCICD # Gives

[1] 0.6722 0.7878

coef(modelCD)

lambda  alpha
0.01026 0.27003

```

```

# Combine all estimates and their confidence intervals into data frames with intervals
estCD <- data.frame(lambda = coef(modelCD)["lambda"], alpha = coef(modelCD)["alpha"],
row.names(estCD) <- "Cobb-Douglas"
#row.names(estCD) <- "Cobb-Douglas: $y = e^{\lambda t}k^{\alpha}l^{\beta}$"
# The [1] subscripts pick off the lower confidence interval
lowerCD <- data.frame(lambda = ciCD["lambda", "2.5%"], alpha = ciCD["alpha", "2.5%"],
row.names(lowerCD) <- "- 95% CI"
# The [2] subscripts pick off the lower confidence interval
upperCD <- data.frame(lambda = ciCD["lambda", "97.5%"], alpha = ciCD["alpha", "97.5%"],
row.names(upperCD) <- "+ 95% CI"

# Now create the data for a table.
dataCD <- rbind(upperCD, estCD, lowerCD); dataCD

      lambda  alpha  beta gamma
+ 95% CI    0.011645 0.3279 0.7878    NA
Cobb-Douglas 0.010256 0.2700 0.7300     0
- 95% CI    0.008862 0.2124 0.6722    NA

colnames(dataCD) <- c("$\\lambda$", "$\\alpha$", "$\\beta$", "$\\gamma$")
tableCD <- xtable(dataCD, caption="U.S. Cobb-Douglas, 1980-2011", digit = c(4, 4,

```

```

print(tableCD, caption.placement="top")

```

	$\lambda$	$\alpha$	$\beta$	$\gamma$
+ 95% CI	0.0116	0.33	0.79	
Cobb-Douglas	0.0103	0.27	0.73	0.0
- 95% CI	0.0089	0.21	0.67	

```

# According to http://cran.r-project.org/web/packages/xtable/vignettes/xtableGallery
# be able to use the "sanitize.text.function" parameter to allow markup in column
# line is not working at the present time. --MKH, 18 Jan 2012.
# print(tableCD, caption.placement="top", sanitize.text.function = function(x){x})

```

## 2. Cobb-Douglas With Energy

We can force  $\alpha$ ,  $\beta$ , and  $\gamma$  to be in  $[0, 1]$  by a reparameterization:

$$a \in [0, 1], b \in [0, 1], \alpha = \min(a, b), \beta = |b - a|, \gamma = 1 - \max(a, b)$$

```
#####
# This function fits the Cobb Douglas production function including energy to hist
# The functional form is
#
# iGDP = exp(lambda * itime) * iCapStk^alpha * iLabor^beta * iEnergy^gamma
#
# iYear: time indexed to 0.0 at the first year [years since beginning of data set]
# iGDP = time series GDP data indexed to 1.0 at the first year [-]
# iCapStk = time series capital stock data indexed to 1.0 at the first year [-]
# iLabor = time series labor data indexed to 1.0 at the first year [-]
# iEnergy = time series energy data indexed to 1.0 at the first year [-].
#     This may be any of heat (iQ), exergy (iX), or useful work (iU).
#
# returns a data object containing three rows and 5 columns.
#   col 1: lambda
#   col 2: alpha
#   col 3: beta
#   col 4: gamma
#   row 1: -95% CI for each parameter
#   row 2: estimate for each parameter
#   row 3: +95% CI for each parameter
#
# dataTable is the table to be used for this curve fit
# iEnergy is the name of the column to be used for energy.
#   This may be any of heat (iQ), exergy (iX), or useful work (iU).
##
cobbDouglasEnergy <- function(dataTable, energyColumnName, energyString){
  # Reparameterize to ensure that we meet the constraints:
  # * alpha + beta + gamma = 1.0.
  # * alpha, beta, and gamma are all between 0.0 and 1.0.
  # To do this, we reparameterize as
```

```

# * 0 < a < 1
# * 0 < b < 1
# * alpha = min(a, b)
# * beta = b - a
# * gamma = 1 - max(a, b)
iEnergy <- dataTable[energyColumnName] #grabs the energy column
lambdaGuess <- 0.0 # guessing lambda = 0 means there is no technological progress
alphaGuess <- 0.3 # a typical value for alpha
betaGuess <- 0.7 # a typical value for beta
modelCDe <- nls(iGDP ~ exp(lambda*iYear) *
                iCapStk^min(a,b) * iLabor^abs(b-a) *
                iEnergy^(1.0 - max(a,b)),
                algorithm = "port",
                start = list(lambda=lambdaGuess, a=alphaGuess, b=alphaGuess+betaGuess),
                lower = list(lambda=-Inf, a=0, b=0),
                upper = list(lambda=Inf, a=1, b=1),
                data = dataTable)
aicCDe <- AIC(modelCDe, k=2) # Checks validity of the model. AIC stands for Akaike
print(aicCDe)

summaryCDe <- summary(modelCDe) # Gives the nls summary table
print(summaryCDe)

# Provides confidence intervals on lambda, a, and b. But, we need CIs on alpha and beta
ciCDe <- confint(modelCDe, level = 0.95)
print(ciCDe)

a <- as.numeric(coef(modelCDe)["a"])
b <- as.numeric(coef(modelCDe)["b"])
lambda <- as.numeric(coef(modelCDe)["lambda"])
alpha <- a
beta <- b - a
gamma <- 1.0 - alpha - beta

# Report results with SE
beta.est <- deltaMethod(modelCDe, "b-a") # Reports results for beta, because beta = b-a
gamma.est <- deltaMethod(modelCDe, "1-b") # Reports results for gamma, because gamma = 1-b

```

```

# Now calculate confidence intervals.
dofCDe <- summaryCDe$df[2] # Gives the degrees of freedom for the model.
print(dofCDe)
tvalCDe <- qt(0.975, df = dofCDe)
print(tvalCDe)
betaCICDe <- with(beta.est, Estimate + c(-1.0, 1.0) * tvalCDe * SE) # Gives the
print(betaCICDe)
gammaCICDe <- with(gamma.est, Estimate + c(-1.0, 1.0) * tvalCDe * SE) # Gives the
print(gammaCICDe)

# Combine all estimates and their confidence intervals into data frames with int
estCDe <- data.frame(lambda = lambda, alpha = alpha, beta = beta, gamma = gamma)
print(estCDe);
#row.names(estCDe) <- "Cobb-Douglas with e: $y = e^{\lambda t}k^{\alpha}l^{\beta}b^{\gamma}$"
row.names(estCDe) <- paste("C-D with ", energyString, sep="")
# The [1] subscripts pick off the lower confidence interval
lowerCDe <- data.frame(lambda = ciCDe["lambda", "2.5%"], alpha = ciCDe["a", "2.5%"])
row.names(lowerCDe) <- "- 95% CI"
# The [2] subscripts pick off the lower confidence interval
upperCDe <- data.frame(lambda = ciCDe["lambda", "97.5%"], alpha = ciCDe["a", "97.5%"])
row.names(upperCDe) <- "+ 95% CI"

# Now create the data for a table.
dataCDe <- rbind(upperCDe, estCDe, lowerCDe)
print(dataCDe)

return(dataCDe)
}

```

### 2.1. Cobb-Douglas with $Q$

```
dataCDq <- cobbDouglasEnergy(dataTable, "iQ", "q")
```

```
[1] -161.1
```

```
Formula: iGDP ~ exp(lambda * iYear) * iCapStk^min(a, b) * iLabor^abs(b -
```

```

a) * iEnergy^(1 - max(a, b))

Parameters:
      Estimate Std. Error t value Pr(>|t|)
lambda  0.01049   0.00108   9.67  1.4e-10
a        0.26322   0.03795   6.94  1.3e-07
b        0.97890   0.07647  12.80  1.9e-13

Residual standard error: 0.0181 on 29 degrees of freedom

Algorithm "port", convergence message: relative convergence (4)

Waiting for profiling to be done...

      2.5%  97.5%
lambda 0.00885 0.0127
a      0.18580 0.3283
b      0.82175   NA
[1] 29
[1] 2.045
[1] 0.5947 0.8367
[1] -0.1353 0.1775
      lambda alpha  beta  gamma
1 0.01049 0.2632 0.7157 0.0211
      lambda alpha  beta  gamma
+ 95% CI  0.01270 0.3283 0.8367 0.1775
C-D with q 0.01049 0.2632 0.7157 0.0211
- 95% CI  0.00885 0.1858 0.5947 -0.1353

# TODO Develop a better caption for the table based on the data automatically.
tableCDq <- xtable(dataCDq, caption="U.S., 1980-2011.", digit = c(4, 4, 2, 2, 3))
#estCDe <- dataCDe[2]
#dataAll <- rbind(estCD, estCDe); dataAll
#tableAll <- xtable(dataAll, caption="U.S. 1980-2011, All Models.", digit = c(4, 4, 2, 2, 3))

```



```
print(tableCDq, caption.placement="top")
```

Table 2: U.S., 1980-2011.

	lambda	alpha	beta	gamma
+ 95% CI	0.0127	0.33	0.84	0.177
C-D with q	0.0105	0.26	0.72	0.021
- 95% CI	0.0089	0.19	0.59	-0.135

```
# According to http://cran.r-project.org/web/packages/xtable/vignettes/xtableGalle
# be able to use the "sanitize.text.function" parameter to allow markup in column
# line is not working at the present time. --MKH, 18 Jan 2012.
# print(tableCDe, sanitize.text.function = function(x){x})

#print(tableAll, caption.placement="top")
```

## 2.2. Cobb-Douglas With $X$

```
dataCDx <- cobbDouglasEnergy(dataTable, "iX", "x")
```

```
[1] -161.4
```

```
Formula: iGDP ~ exp(lambda * iYear) * iCapStk^min(a, b) * iLabor^abs(b -
a) * iEnergy^(1 - max(a, b))
```

Parameters:

	Estimate	Std. Error	t value	Pr(> t )
lambda	0.01071	0.00105	10.16	4.6e-11
a	0.25689	0.03666	7.01	1.0e-07
b	0.95700	0.07467	12.82	1.8e-13

Residual standard error: 0.018 on 29 degrees of freedom

Algorithm "port", convergence message: relative convergence (4)

*Waiting for profiling to be done...*

```

          2.5%   97.5%
lambda 0.008902 0.01287
a       0.182137 0.32622
b       0.803506      NA
[1] 29
[1] 2.045
[1] 0.5791 0.8211
[1] -0.1097 0.1957
      lambda alpha  beta gamma
1 0.01071 0.2569 0.7001 0.043
      lambda alpha  beta  gamma
+ 95% CI  0.012867 0.3262 0.8211 0.1957
C-D with x 0.010714 0.2569 0.7001 0.0430
- 95% CI  0.008902 0.1821 0.5791 -0.1097

tableCDx <- xtable(dataCDx, caption="U.S., 1980-2011.", digit = c(4, 4, 2, 2, 3))

print(tableCDx, caption.placement="top")

```

	lambda	alpha	beta	gamma
+ 95% CI	0.0129	0.33	0.82	0.196
C-D with x	0.0107	0.26	0.70	0.043
- 95% CI	0.0089	0.18	0.58	-0.110

### 2.3. Cobb-Douglas With U

```

dataCDu <- cobbDouglasEnergy(dataTable, "iU", "U")
Error: Missing value or an infinity produced when evaluating the
model
tableCDu <- xtable(dataCDu, caption="U.S., 1980-2011.", digit = c(4, 4, 2, 2, 3))
Error: object 'dataCDu' not found

```

```
print(tableCDu, caption.placement="top")
```

```
Error: error in evaluating the argument 'x' in selecting a method
for function 'print': Error: object 'tableCDu' not found
```

### 3. CES With Q

```
# Establish guess values for alpha, beta, and lambda.
phiGuess <- -20
betaGuess <- 0.5 # a typical value for beta (exponent on labor)
zetaGuess <- 0.0004 # a small value
lambda_LGuess <- 0.007 #assuming no technical progress on the labor-capital portion
lambda_EGuess <- 0.008 #assuming no technical progress on the energy portion of the

# Runs a non-linear least squares fit to the data with constraints
modelCESQ <- nls(iGDP ~ ((1-zeta) * (exp(lambda_L*iYear) * iLabor^beta * iCapStk^(1 -
    + zeta*(exp(lambda_E*iYear) * iQ)^phi)^(1/phi),
    algorithm = "port",
    control = nls.control(maxiter = 500, tol = 1e-06, minFactor = 1/1000,
        printEval = FALSE, warnOnly = FALSE),
    start = list(phi=phiGuess, beta=betaGuess, zeta=zetaGuess, lambda_L=
        lambda_LGuess, lambda_E=lambda_EGuess),
    lower = list(phi=-Inf, beta=0, zeta=0, lambda_L=-Inf, lambda_E=-Inf),
    upper = list(phi=0, beta=1, zeta=1, lambda_L=Inf, lambda_E=Inf),
    data=dataTable)

# Gives the nls summary table
summary(modelCESQ)

Formula: iGDP ~ ((1 - zeta) * (exp(lambda_L * iYear) * iLabor^beta * iCapStk^(1 -
    beta))^phi + zeta * (exp(lambda_E * iYear) * iQ)^phi)^(1/phi)


Parameters:
            Estimate Std. Error t value Pr(>|t|)
phi        -2.22e+01  1.50e+01  -1.48    0.1512
```

beta	5.82e-01	5.20e-02	11.19	1.2e-11
zeta	3.51e-04	1.38e-03	0.25	0.8014
lambda_L	7.62e-03	8.30e-04	9.18	8.5e-10
lambda_E	8.05e-03	2.84e-03	2.84	0.0085


Residual standard error: 0.00993 on 27 degrees of freedom

Algorithm "port", convergence message: relative convergence (4)

```
xyplot( resid(modelCESQ) ~ fitted(modelCESQ) )
```

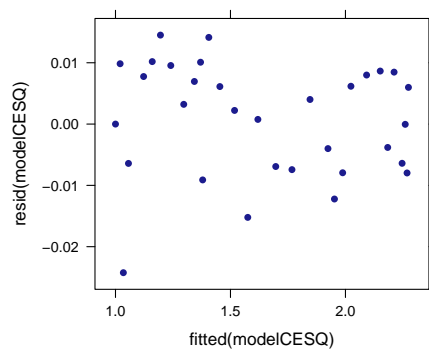

```
histogram( ~resid(modelCESQ) )
```

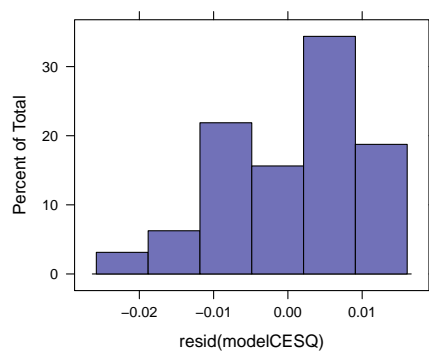

```
qqmath( ~resid(modelCESQ) )
```

