


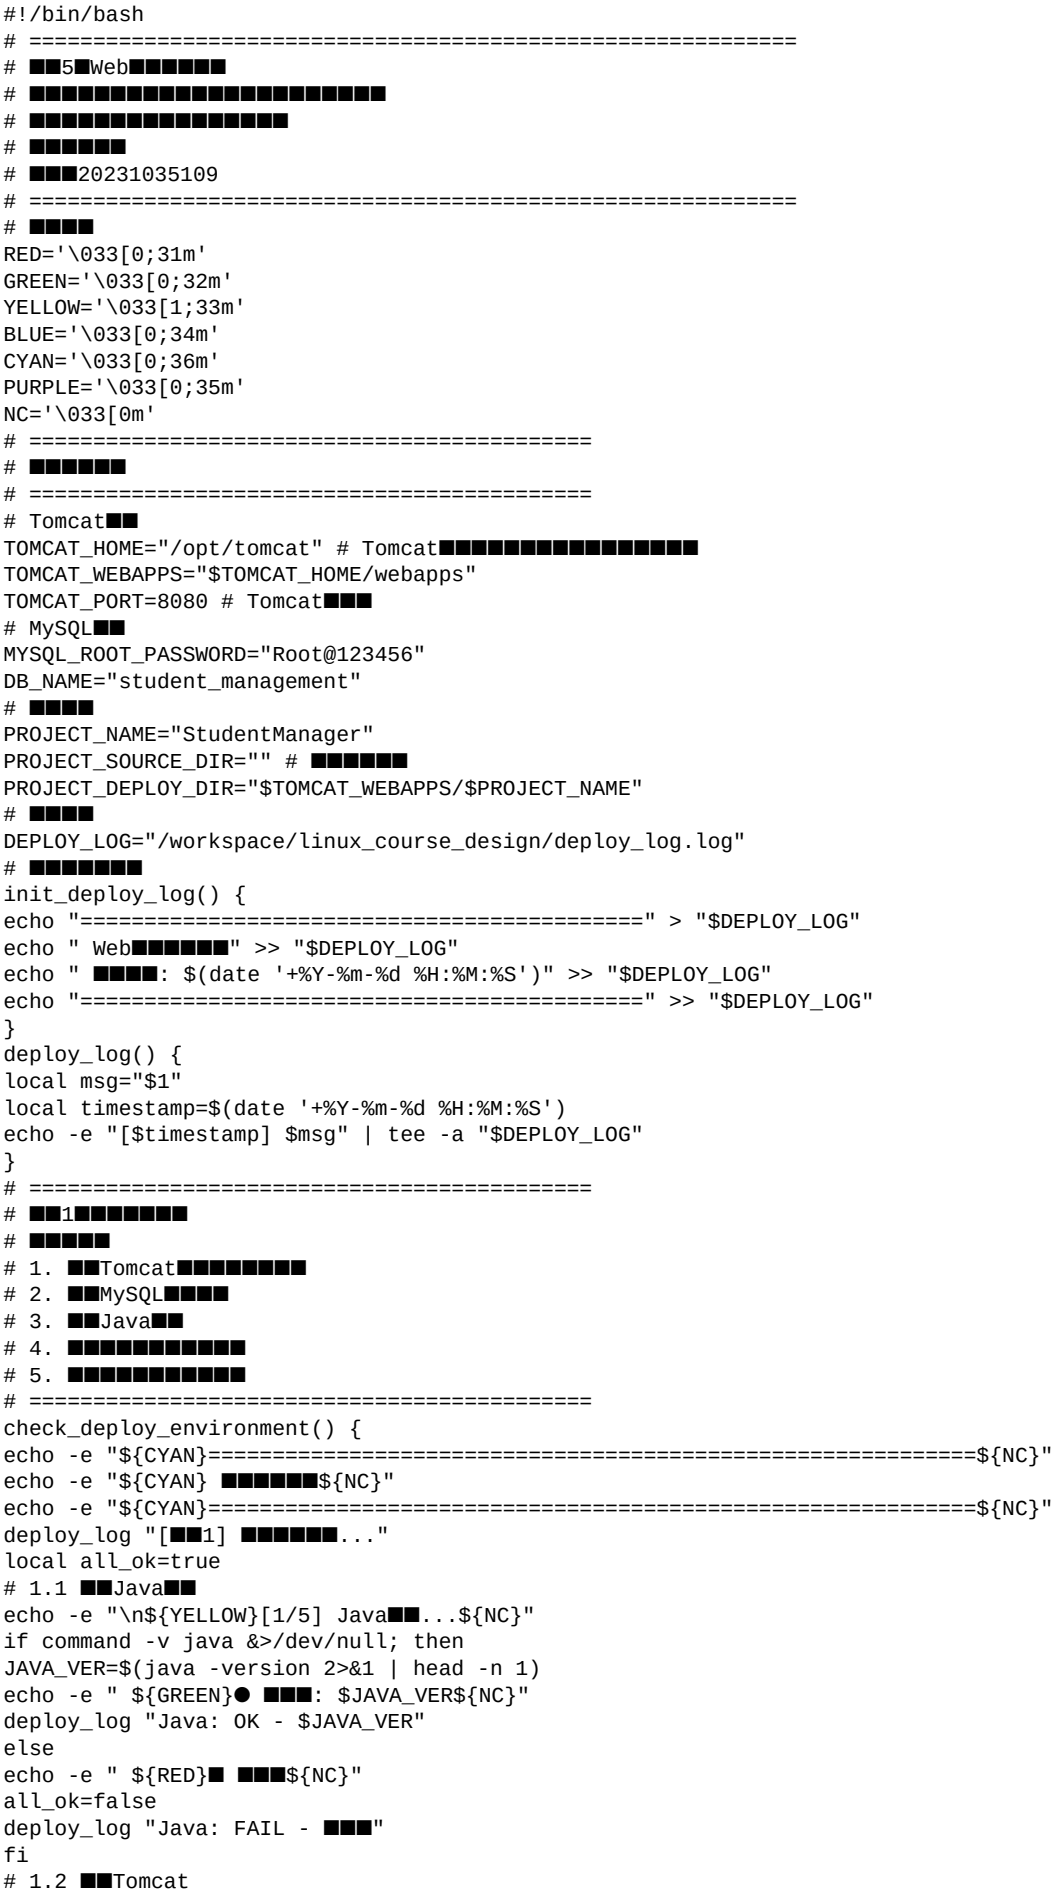

[illegible]

```

echo -e "${CYAN}===== ${NC}"
echo -e "${CYAN} ████████ ${NC}"
echo -e "${CYAN}===== ${NC}"
deploy_log "[██2] ██████..."
# 2.1 ████████
echo ""
echo -e "${YELLOW}██████: ${NC}"
echo " 1. ████████"
echo " 2. ████████████████████"
read -p "████ (1-2): " source_choice
case $source_choice in
1)
copy_from_local
;;
2)
create_demo_project
;;
*)
echo -e "${RED}[██] ██████ ${NC}"
return 1
;;
esac
}
# ████████
copy_from_local() {
read -p "██████████████████: " PROJECT_SOURCE_DIR
# ████████
if [ ! -d "$PROJECT_SOURCE_DIR" ]; then
echo -e "${RED}[██] ██████: $PROJECT_SOURCE_DIR ${NC}"
return 1
fi
echo -e "${YELLOW}[██] ██████... ${NC}"
echo -e " █████: $PROJECT_SOURCE_DIR"
echo -e " █████: $PROJECT_DEPLOY_DIR"
# ████████████████████
if [ -d "$PROJECT_DEPLOY_DIR" ]; then
BACKUP_DIR="${PROJECT_DEPLOY_DIR}_bak_$(date +%Y%m%d%H%M%S)"
mv "$PROJECT_DEPLOY_DIR" "$BACKUP_DIR"
echo -e "${YELLOW} ██████: $BACKUP_DIR ${NC}"
fi
# ████████cp███████
cp -r "$PROJECT_SOURCE_DIR" "$PROJECT_DEPLOY_DIR"
if [ $? -eq 0 ]; then
# ██████
chmod -R 755 "$PROJECT_DEPLOY_DIR"
# ████████
file_count=$(find "$PROJECT_DEPLOY_DIR" -type f | wc -l)
dir_count=$(find "$PROJECT_DEPLOY_DIR" -type d | wc -l)
echo -e "${GREEN}[██] ████████ ${NC}"
echo -e " █████: $file_count █"
echo -e " █████: $dir_count █"
deploy_log "██████: $PROJECT_SOURCE_DIR -> $PROJECT_DEPLOY_DIR"
else
echo -e "${RED}[██] ██████ ${NC}"
return 1
fi
}
# ████████████████████
create_demo_project() {
echo -e "${YELLOW}[██] ██████... ${NC}"
echo -e " █████: $PROJECT_NAME"
echo -e " █████: $PROJECT_DEPLOY_DIR"
# ████████████████
rm -rf "$PROJECT_DEPLOY_DIR"
# █████web███████
mkdir -p "$PROJECT_DEPLOY_DIR"
mkdir -p "$PROJECT_DEPLOY_DIR/WEB-INF"
mkdir -p "$PROJECT_DEPLOY_DIR/images"
mkdir -p "$PROJECT_DEPLOY_DIR/css"
mkdir -p "$PROJECT_DEPLOY_DIR/js"
# =====
# █████ index.html
# =====
cat > "$PROJECT_DEPLOY_DIR/index.html" << 'HTMLEOF'

```

```
<!DOCTYPE html>
<html lang="zh-CN">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>■■■■■■ - Linux■■■■■</title>
<link rel="stylesheet" href="css/style.css">
</head>
<body>
<div class="container">
<header>
<h1>■■■■■■</h1>
<p class="subtitle">Linux■■■■■■■■■■■■■■■■■■■■</p>
</header>
<nav class="navbar">
<a href="index.html" class="active">■■■</a>
<a href="student_list.html">■■■■■</a>
<a href="about.html">■■■■■</a>
</nav>
<main>
<section class="welcome-section">
<h2>■■■■■■■■■■■■■■■■■■■■</h2>
<p>■■■■■■Linux Shell■■■■■Web■■■■■■■■■■■■■■■■■■■■</p>
<div class="info-cards">
<div class="card">
<h3>■■■</h3>
<ul>
<li>Linux■■■■■</li>
<li>Shell■■■■■</li>
<li>Apache Tomcat</li>
<li>MySQL■■■■■</li>
</ul>
</div>
<div class="card">
<h3>■■■■■</h3>
<ul>
<li>■■■■■</li>
<li>■■■■■</li>
<li>■■■■■</li>
<li>■■■■■</li>
</ul>
</div>
</div>
</section>
<section class="status-section">
<h2>■■■■■</h2>
<table class="status-table">
<tr><td>■■■■</td><td class="success">■■■■■</td></tr>
<tr><td>■■■■</td><td class="success">■■■■</td></tr>
<tr><td>■■■■■</td><td id="deploy-time"></td></tr>
<tr><td>■■■■■</td><td>v1.0.0</td></tr>
</table>
</section>
</main>
<footer>
<p>&copy; 2024 Linux■■■■■■■■■■ | ■■■■■■</p>
</footer>
</div>
<script src="js/main.js"></script>
</body>
</html>
HTMLEOF
# =====
# ■■■■■■■■■ student_list.html
# =====
cat > "$PROJECT_DEPLOY_DIR/student_list.html" << 'HTMLEOF'
<!DOCTYPE html>
<html lang="zh-CN">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>■■■■■ - ■■■■■■■■</title>
<link rel="stylesheet" href="css/style.css">
</head>
```

```

<body>
<div class="container">
<header>
<h1>■■■■■■■■■■</h1>
</header>
<nav class="navbar">
<a href="index.html">■■</a>
<a href="student_list.html" class="active">■■■■</a>
<a href="about.html">■■■■</a>
</nav>
<main>
<section class="list-section">
<h2>■■■■■■■■■■</h2>
<div class="toolbar">
<input type="text" id="search-input" placeholder="■■■■....">
<button onclick="searchStudents()">■■</button>
</div>
<table class="data-table">
<thead>
<tr>
<th>■■</th>
<th>■■</th>
<th>■■</th>
<th>■■</th>
<th>■■</th>
<th>■■</th>
<th>■■</th>
</tr>
</thead>
<tbody id="student-tbody">
<!-- ■■■■■JavaScript■■■■ -->
</tbody>
</table>
<div class="pagination">
<button onclick="prevPage()">■■■</button>
<span id="page-info">■ 1 ■</span>
<button onclick="nextPage()">■■■</button>
</div>
</section>
</main>
<footer>
<p>&copy; 2024 Linux■■■■■■■■■■</p>
</footer>
</div>
<script src="js/main.js"></script>
</body>
</html>
HTMLEOF
# =====
# ■■■■■■■ about.html
# =====
cat > "$PROJECT_DEPLOY_DIR/about.html" << 'HTMLEOF'
<!DOCTYPE html>
<html lang="zh-CN">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>■■■■ - ■■■■■■■</title>
<link rel="stylesheet" href="css/style.css">
</head>
<body>
<div class="container">
<header>
<h1>■■■■■■■■■■</h1>
</header>
<nav class="navbar">
<a href="index.html">■■</a>
<a href="student_list.html">■■■■</a>
<a href="about.html" class="active">■■■■</a>
</nav>
<main>
<section class="about-section">
<h2>■■■■</h2>
<div class="about-content">
<h3>■■■■</h3>

```

```

<p>■■■■Linux■■■■■■■■■■■■■■■■■■■■Linux■■■■■■■■■■Web■■■■■■■■■■</p>
<h3>■■■■</h3>
<ul>
<li><strong>■■■■</strong>■■Shell■■■■■■■■■■■■■■■■■■■■</li>
<li><strong>■■■■</strong></strong>■■Shell■■■■■■■■■■■■■■■■■■■■</li>
<li><strong>■■■■■■■■■■</strong>■■■■■■■■■■MySQL■■■■</li>
<li><strong>■■■■■■■■■■</strong>■■■■■■■■■■Tomcat■■■■</li>
<li><strong>■■■■■■■■■■</strong>■■■■Web■■■■■■■■■■</li>
</ul>
<h3>■■■■</h3>
<ol>
<li>■■■■Linux■■■■■■■■■■■■■■■■■■■■</li>
<li>■■■■Shell■■■■■■■■■■■■■■■■■■■■</li>
<li>■■■■Linux■■■■■■■■■■■■■■■■■■■■</li>
<li>■■■■Web■■■■■■■■■■■■■■■■■■■■</li>
<li>■■■■■■■■■■■■■■■■■■■■</li>
</ol>
</div>
</section>
</main>
<footer>
<p>&copy; 2024 Linux■■■■■■■■■■</p>
</footer>
</div>
<script src="js/main.js"></script>
</body>
</html>
HTMLEOF
# =====
# ■■■CSS■■■■ css/style.css
# =====
cat > "$PROJECT_DEPLOY_DIR/css/style.css" << 'CSSEOF'
/* ■■■■■■■■■■■■■■■■■■■■■ */
* {
margin: 0;
padding: 0;
box-sizing: border-box;
}
body {
font-family: 'Microsoft YaHei', Arial, sans-serif;
background-color: #f5f5f5;
color: #333;
line-height: 1.6;
}
.container {
max-width: 1200px;
margin: 0 auto;
background: white;
min-height: 100vh;
}
header {
background: linear-gradient(135deg, #667eea 0%, #764ba2 100%);
color: white;
padding: 30px;
text-align: center;
}
header h1 {
font-size: 2.5em;
margin-bottom: 10px;
}
header .subtitle {
font-size: 1.1em;
opacity: 0.9;
}
.navbar {
background: #333;
padding: 0;
display: flex;
justify-content: center;
}
.navbar a {
color: white;
padding: 15px 30px;
text-decoration: none;

```

```

transition: background 0.3s;
}
.navbar a:hover,
.navbar a.active {
background: #667eea;
}
main {
padding: 30px;
}
.welcome-section h2,
.list-section h2,
.about-section h2 {
color: #667eea;
margin-bottom: 20px;
padding-bottom: 10px;
border-bottom: 2px solid #667eea;
}
.info-cards {
display: grid;
grid-template-columns: repeat(auto-fit, minmax(300px, 1fr));
gap: 20px;
margin-top: 20px;
}
.card {
background: #f9f9f9;
padding: 20px;
border-radius: 10px;
box-shadow: 0 2px 10px rgba(0,0,0,0.1);
}
.card h3 {
color: #764ba2;
margin-bottom: 15px;
}
.card ul {
list-style: none;
padding-left: 0;
}
.card ul li {
padding: 8px 0;
border-bottom: 1px solid #eee;
}
.card ul li:before {
content: "✓ ";
color: #667eea;
font-weight: bold;
}
.status-table {
width: 100%;
max-width: 500px;
border-collapse: collapse;
margin-top: 20px;
}
.status-table td {
padding: 12px 15px;
border: 1px solid #ddd;
}
.status-table td:first-child {
font-weight: bold;
background: #f5f5f5;
width: 40%;
}
.success {
color: #28a745;
font-weight: bold;
}
.data-table {
width: 100%;
border-collapse: collapse;
margin-top: 20px;
background: white;
box-shadow: 0 2px 10px rgba(0,0,0,0.1);
}
.data-table th,
.data-table td {

```

```
padding: 12px 15px;
text-align: left;
border-bottom: 1px solid #ddd;
}
.data-table th {
background: #667eea;
color: white;
font-weight: bold;
}
.data-table tr:hover {
background: #f5f5f5;
}
.toolbar {
margin-bottom: 20px;
display: flex;
gap: 10px;
}
.toolbar input {
flex: 1;
padding: 10px 15px;
border: 1px solid #ddd;
border-radius: 5px;
font-size: 14px;
}
.toolbar button {
padding: 10px 25px;
background: #667eea;
color: white;
border: none;
border-radius: 5px;
cursor: pointer;
transition: background 0.3s;
}
.toolbar button:hover {
background: #764ba2;
}
.pagination {
margin-top: 20px;
display: flex;
justify-content: center;
align-items: center;
gap: 15px;
}
.pagination button {
padding: 8px 20px;
background: #667eea;
color: white;
border: none;
border-radius: 5px;
cursor: pointer;
}
.about-content {
line-height: 1.8;
}
.about-content h3 {
color: #667eea;
margin: 25px 0 15px;
font-size: 1.3em;
}
.about-content ul,
.about-content ol {
margin-left: 25px;
margin-top: 10px;
}
.about-content li {
margin-bottom: 8px;
}
footer {
background: #333;
color: white;
text-align: center;
padding: 20px;
margin-top: 40px;
}
```


[illegible]

```

<web-app xmlns="http://xmlns.jcp.org/xml/ns/javaee"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://xmlns.jcp.org/xml/ns/javaee
http://xmlns.jcp.org/xml/ns/javaee/web-app_4_0.xsd"
version="4.0">
<display-name>■■■■■■■■■■</display-name>
<description>
Linux■■■■■■■■■■ - ■■■■■■■■■■
</description>
<welcome-file-list>
<welcome-file>index.html</welcome-file>
<welcome-file>index.htm</welcome-file>
</welcome-file-list>
</web-app>
XMLEOF
# ■■■■■■
chmod -R 755 "$PROJECT_DEPLOY_DIR"
# ■■■■■■■■■■
file_count=$(find "$PROJECT_DEPLOY_DIR" -type f | wc -l)
echo -e "${GREEN}[■■■] ■■■■■■■■■■${NC}"
echo -e " ■■■■■: $PROJECT_NAME"
echo -e " ■■■■■: $PROJECT_DEPLOY_DIR"
echo -e " ■■■■■: $file_count"
echo -e "\n${YELLOW}--- ■■■■■ ---${NC}"
tree "$PROJECT_DEPLOY_DIR" 2>/dev/null || find "$PROJECT_DEPLOY_DIR" -type f | head -20
deploy_log "■■■■■■■■■■: $PROJECT_DEPLOY_DIR ($file_count ■■■■)"
}
# =====
# ■■■3■■■■MySQL■■■
# ■■■■■■
# 1. ■■■MySQL■■■■■
# 2. ■■■■■■■■■■
# 3. ■■■■■■■■■■■■■■■■■■
# 4. ■■■■■■■■■■
# =====
start_mysql_service() {
echo -e "${CYAN}===== ${NC}"
echo -e "${CYAN} ■■■MySQL■■■■${NC}"
echo -e "${CYAN}===== ${NC}"
deploy_log "[■■■3] ■■■MySQL■■■..."
# 3.1 ■■■MySQL■■■■■
echo -e "${YELLOW}[■■■] MySQL■■■■■...${NC}"
if sudo systemctl is-active --quiet mysqld 2>/dev/null || \
sudo systemctl is-active --quiet mariadb 2>/dev/null; then
echo -e "${GREEN} MySQL■■■■■${NC}"
else
echo -e "${YELLOW}[■■■] MySQL■■■...${NC}"
sudo systemctl start mysqld 2>/dev/null || sudo systemctl start mariadb 2>/dev/null
sleep 3
if sudo systemctl is-active --quiet mysqld 2>/dev/null || \
sudo systemctl is-active --quiet mariadb 2>/dev/null; then
echo -e "${GREEN} MySQL■■■■■${NC}"
deploy_log "MySQL■■■■■■■■■■"
else
echo -e "${RED}[■■■] MySQL■■■■■${NC}"
deploy_log "MySQL■■■■■"
return 1
fi
fi
# 3.2 ■■■■■■■■■■
echo -e "\n${YELLOW}[■■■] ■■■■■...${NC}"
if mysql -u root -p"$MYSQL_ROOT_PASSWORD" -e "SELECT 'Connection OK';" 2>/dev/null; then
echo -e "${GREEN} ■■■■■■■■■■${NC}"
deploy_log "■■■■■■■■■■"
else
echo -e "${RED}[■■■] ■■■■■■■■■■■■■■■■■■${NC}"
deploy_log "■■■■■■■■■■"
fi
# 3.3 ■■■■■■■■■■■■■■■■■■
echo -e "\n${YELLOW}[■■■] ■■■■■...${NC}"
DB_EXISTS=$(mysql -u root -p"$MYSQL_ROOT_PASSWORD" -e "SHOW DATABASES LIKE '$DB_NAME';" 2>/dev/null | wc
-l)
if [ "$DB_EXISTS" -gt 0 ]; then
echo -e "${GREEN} ■■■■ '$DB_NAME' ■■■■${NC}"

```

```

else
echo -e "${YELLOW}[■■■] ■■■■■■■■■■...${NC}"
# ■■■■■■■■■■SQL
echo -e "${GREEN} ■■■■■■■■■■${NC}"
deploy_log "■■■■■■■■■"
fi
return 0
}
# =====
# ■■■4■■■Tomcat■■■
# ■■■■■■
# 1. ■■■Tomcat■■■■■
# 2. ■■■startup.sh■■■Tomcat
# 3. ■■■■■■■■■■■■■■■■■■
# 4. ■■■HTTP■■■■■
# =====
start_tomcat_service() {
echo -e "${CYAN}===== ${NC}"
echo -e "${CYAN} ■■■Tomcat■■■${NC}"
echo -e "${CYAN}===== ${NC}"
deploy_log "[■■■4] ■■■Tomcat■■■..."
# 4.1 ■■■Tomcat■■■■■
if [ ! -d "$TOMCAT_HOME" ]; then
echo -e "${RED}[■■■] Tomcat■■■■: $TOMCAT_HOME${NC}"
echo -e "${YELLOW}■■■■■4■■■Tomcat■■■■${NC}"
return 1
fi
# 4.2 ■■■■■Tomcat
echo -e "${YELLOW}[■■■] Tomcat■■■...${NC}"
if pgrep -f "org.apache.catalina.startup.Bootstrap" > /dev/null; then
echo -e "${GREEN} Tomcat■■■■■${NC}"
# ■■■■■■■■■■
read -p "■■■■■■■■■■Tomcat(y/n): " restart_tc
if [ "$restart_tc" = "y" ] || [ "$restart_tc" = "Y" ]; then
restart_tomcat
fi
else
echo -e "${YELLOW}[■■■] Tomcat■■■...${NC}"
cd "$TOMCAT_HOME"
export JAVA_HOME=$(dirname $(dirname $(readlink -f $(which java))))
./bin/startup.sh
if [ $? -eq 0 ]; then
echo -e "${GREEN} Tomcat■■■■■${NC}"
else
echo -e "${RED}[■■■] Tomcat■■■■■${NC}"
return 1
fi
fi
# 4.3 ■■■Tomcat■■■■■
echo -e "\n${YELLOW}[■■■] ■■■■■■■■■10■■■...${NC}"
sleep 10
# 4.4 ■■■■■■
check_tomcat_running
}
# ■■■Tomcat
restart_tomcat() {
echo -e "${YELLOW}[■■■] ■■■Tomcat...${NC}"
cd "$TOMCAT_HOME"
export JAVA_HOME=$(dirname $(dirname $(readlink -f $(which java))))
./bin/shutdown.sh 2>/dev/null
sleep 3
pkill -9 -f catalina 2>/dev/null
sleep 2
./bin/startup.sh
sleep 10
echo -e "${GREEN} Tomcat■■■■■${NC}"
deploy_log "Tomcat■■■"
}
# ■■■Tomcat■■■■■
check_tomcat_running() {
PORT=${TOMCAT_PORT:-8080}
PROJECT_URL="http://localhost:$PORT/$PROJECT_NAME/"
echo -e "\n${YELLOW}--- ■■■■■ ---${NC}\n"
# ■■■■

```

```

if pgrep -f "org.apache.catalina.startup.Bootstrap" > /dev/null; then
echo -e " ${GREEN}● ■■: ■■■${NC}"
else
echo -e " ${RED}■ ■■: ■■■${NC}"
return 1
fi
# ■■■■
if ss -tlnp 2>/dev/null | grep -q ":$PORT "; then
echo -e " ${GREEN}● ■■ $PORT: ■■■${NC}"
else
echo -e " ${RED}■ ■■ $PORT: ■■■${NC}"
fi
# HTTP■■
if command -v curl &>/dev/null; then
HTTP_CODE=$(curl -s -o /dev/null -w "%{http_code}" http://localhost:$PORT/ --connect-timeout 5
2>/dev/null)
if [ "$HTTP_CODE" = "200" ] || [ "$HTTP_CODE" = "302" ]; then
echo -e " ${GREEN}● HTTP: ■■■ ($HTTP_CODE)${NC}"
else
echo -e " ${RED}■ HTTP: ■■■ ($HTTP_CODE)${NC}"
fi
fi
echo ""
echo -e "${GREEN}===== ${NC}"
echo -e "${GREEN} ■■■■: ${NC}"
echo -e "${BLUE} $PROJECT_URL${NC}"
echo -e "${GREEN}===== ${NC}"
deploy_log "Tomcat■■■■, ■■■=$PROJECT_URL"
return 0
}
# =====
# ■■5■■■■■■■■
# ■■■■
# 1. ■■curl■■HTTP■■■■■■■■
# 2. ■■■■■■■■
# 3. ■■■■■■■■
# 4. ■■■■■■■■
# =====
test_project_access() {
echo -e "${CYAN}===== ${NC}"
echo -e "${CYAN} ■■■■${NC}"
echo -e "${CYAN}===== ${NC}"
deploy_log "[■■5] ■■■■..."
PORT=${TOMCAT_PORT:-8080}
BASE_URL="http://localhost:$PORT/$PROJECT_NAME"
# 5.1 ■■■■
if ! command -v curl &>/dev/null; then
echo -e "${RED}[■■] ■■■curl■■■■■■■■HTTP■■${NC}"
return 1
fi
echo -e "${YELLOW}[■■] ■■HTTP■■■■...\n${NC}"
# ■■■■■■
declare -A TEST_PAGES
TEST_PAGES["■■"]="$BASE_URL/"
TEST_PAGES["■■■■"]="$BASE_URL/student_list.html"
TEST_PAGES["■■■■"]="$BASE_URL/about.html"
TEST_PAGES["CSS■■"]="$BASE_URL/css/style.css"
TEST_PAGES["JS■■"]="$BASE_URL/js/main.js"
PASS_COUNT=0
TOTAL_COUNT=${#TEST_PAGES[@]}
# ■■■■■■
for page_name in "${!TEST_PAGES[@]}"; do
page_url="${TEST_PAGES[$page_name]}"
printf " %-12s → " "$page_name"
# ■■HTTP GET■■
HTTP_CODE=$(curl -s -o /dev/null -w "%{http_code}" "$page_url" --connect-timeout 10 2>/dev/null)
RESPONSE_TIME=$(curl -s -o /dev/null -w "%{time_total}" "$page_url" --connect-timeout 10 2>/dev/null)
# ■■■■■■
case $HTTP_CODE in
200)
echo -e "${GREEN}✓ ■■ ($HTTP_CODE, ${RESPONSE_TIME}s)${NC}"
PASS_COUNT=$((PASS_COUNT + 1))
;;
302|301)

```

```

PASS_COUNT=$((PASS_COUNT + 1))
;;
404)
echo -e "${RED}X   (404){NC}"
;;
000)
echo -e "${RED}X   {NC}"
;;
*)
echo -e "${YELLOW}   ($HTTP_CODE){NC}"
;;
esac
done
# 5.2
echo ""
echo -e "${PURPLE}                                     {NC}"
echo -e "${YELLOW}   {NC}"
echo -e "${PURPLE}                                     {NC}"
echo -e "   : $(date '+%Y-%m-%d %H:%M:%S')"
echo -e "   : $TOTAL_COUNT"
echo -e "   : ${GREEN}$PASS_COUNT{NC}"
echo -e "   : $((TOTAL_COUNT - PASS_COUNT))"
if [ $PASS_COUNT -eq $TOTAL_COUNT ]; then
echo -e "   : ${GREEN}   ✓{NC}"
deploy_log " ($PASS_COUNT/$TOTAL_COUNT)"
else
echo -e "   : ${RED}   X{NC}"
deploy_log " ($PASS_COUNT/$TOTAL_COUNT)"
fi
echo -e "${PURPLE}                                     {NC}"
echo ""
# 5.3
echo -e "${YELLOW}---   ---{NC}"
echo -e " 1.   "
echo -e " 2.   : ${BLUE}$BASE_URL/{NC}"
echo -e " 3.   "
echo ""
echo -e "   : "
echo -e " -   : ${BLUE}$BASE_URL/{NC}"
echo -e " -   : ${BLUE}$BASE_URL/student_list.html{NC}"
echo -e " -   : ${BLUE}$BASE_URL/about.html{NC}"
}
# =====
# 
# =====
full_deploy() {
echo -e "${CYAN}===== {NC}"
echo -e "${CYAN}   {NC}"
echo -e "${CYAN}===== {NC}"
echo ""
echo -e "${YELLOW}..... {NC}"
echo ""
# 1
check_deploy_environment
if [ $? -ne 0 ]; then
echo -e "${RED}[   ]   {NC}"
return 1
fi
echo ""
# 2
copy_project_code
if [ $? -ne 0 ]; then
echo -e "${RED}[   ]   {NC}"
return 1
fi
echo ""
# 3MySQL
start_mysql_service
echo ""
# 4Tomcat
start_tomcat_service
echo ""
# 5

```

[illegible]