


Viewing Output

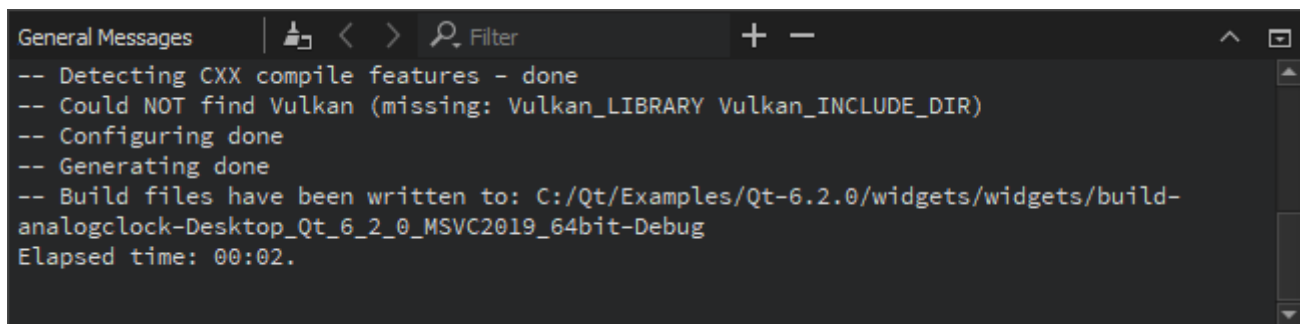


```
General Messages | [Icons] Filter + -
-- Detecting CXX compile features - done
-- Could NOT find Vulkan (missing: Vulkan_LIBRARY Vulkan_INCLUDE_DIR)
-- Configuring done
-- Generating done
-- Build files have been written to: C:/Qt/Examples/Qt-6.2.0/widgets/widgets/build-
analogclock-Desktop_Qt_6_2_0_MSVC2019_64bit-Debug
Elapsed time: 00:02.
```


The taskbar in Qt Design Studio can display following types of output:

- > Issues
- > Search Results
- > Application Output
- > Compile Output
- > QML Debugger Console
- > General Messages
- > Version Control



Output is available on the taskbar in all [modes](#).




You can view output in the following ways:

- > Select the output view on the taskbar.
- > Select **Alt** (**Cmd** on macOS) and the number of the view on the taskbar.
- > Select , and then select the view to open.
- > Select **View > Output**. The menu items also display the keyboard shortcuts that you can use.

To maximize an open output view, select the  (**Maximize**) button or press **Alt+Shift+9**.


To increase or decrease the output text size, select  (**Zoom In**) or  (**Zoom Out**), or press **Ctrl++** or **Ctrl+-**.
Zooming is not supported in all output views.

If the text in the output is not displayed correctly, Qt Design Studio might be using a different codec from the one used by the tools that generate the output. To specify the codec to use, select **Edit > Preferences > Environment > Interface**, and then select the codec in the **Text codec for tools** field.

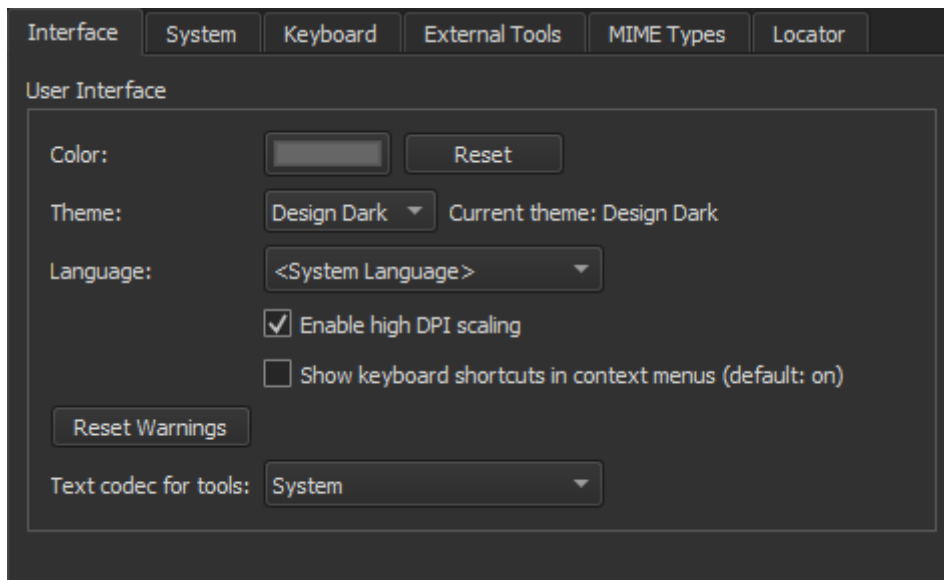

Finding and Filtering Output

To search from output, press **Ctrl+F** when the view is active. Enter search criteria in the **Find** field. For more information, see [Finding and Replacing](#).


Besides searching from the output, you can enter a string in the **Filter** field to filter it. To specify filtering options, select the  button. You can filter output by using regular expressions or case-sensitivity. Select **Show Non-matching Lines** to hide the lines that match the filter.

Finding and filtering are not supported in all output views.

Issues

Issues provides lists of following types of issues:

- **Asset Importer Error** - Errors and warnings encountered while importing assets from a design tool.
- **Build System** - Errors and warnings encountered during a build.
- **Compile** - Selected output from the compiler. Open **Compile Output** for more detailed information.
- **Debug Information** - Lists debug information packages that might be missing.
- **Debugger Runtime** - Errors encountered when starting Qt Design Studio. For example, information about missing DLLs.
- **Deployment** - Errors encountered between building an application successfully and starting it on a [device](#).
- **QML and QML Analysis** - [QML and JavaScript syntax errors](#).

The view filters out irrelevant output from the build tools and presents the issues in an organized way. To further filter the output by type, select  (**Filter Tree**) and then select a filter.

Select one or several lines to apply context-menu actions to their contents. You can remove the selected lines or copy their contents to the clipboard. For single lines, you can search the Internet for a solution using the contents of the line as search criteria or open a version control annotation view of the line that causes the error message.

To navigate to the corresponding source code, click an issue or select **Show in Editor** in the context menu. The entry must contain the name of the file where the issue was found.


To view more information about an issue in [Compile Output](#), select **Show Output** in the context menu.

To jump from one issue to the next or previous one, press **F6** and **Shift+F6**.

By default, the **Issues** view is cleared on a new build. To keep the issues from the previous build rounds, deselect **Edit > Preferences > Build & Run > General > Clear issues list on new build**.


Search Results

In **Search Results**, you can search through projects, files on a file system or the currently open files:

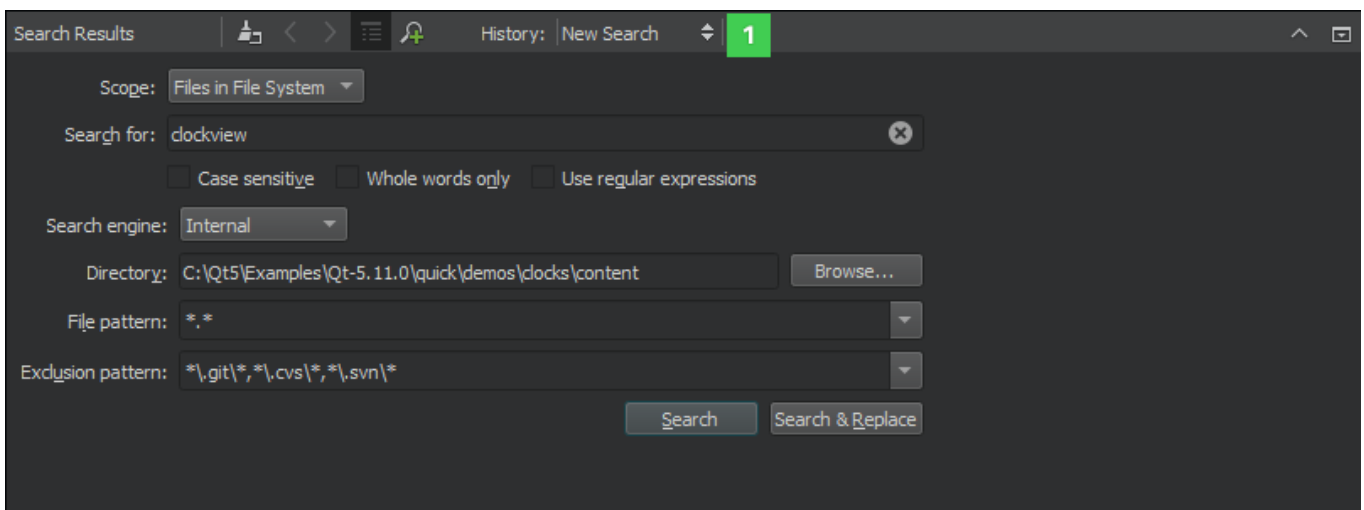

The search results are stored in the search history (1) from which you can select earlier searches.

The figure below shows an example search result for all occurrences of the search string in the specified directory.

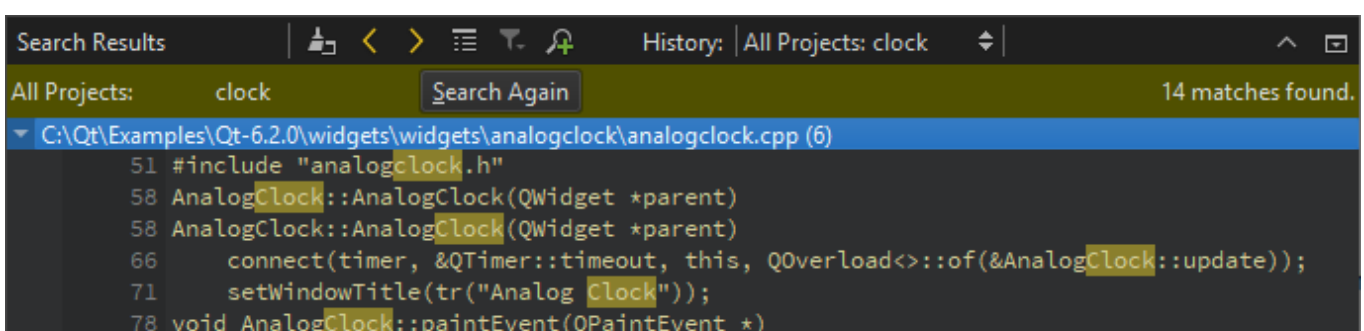

```


57 class AnalogClock : public QWidget
62     AnalogClock(QWidget *parent = nullptr);
▶ C:\Qt\Examples\Qt-6.2.0\widgets\widgets\analogclock\main.cpp (4)

```

For more information about the different search options, see [Finding and Replacing](#).


Application Output

Application Output displays the status of a program when it is executed, and the debug output.

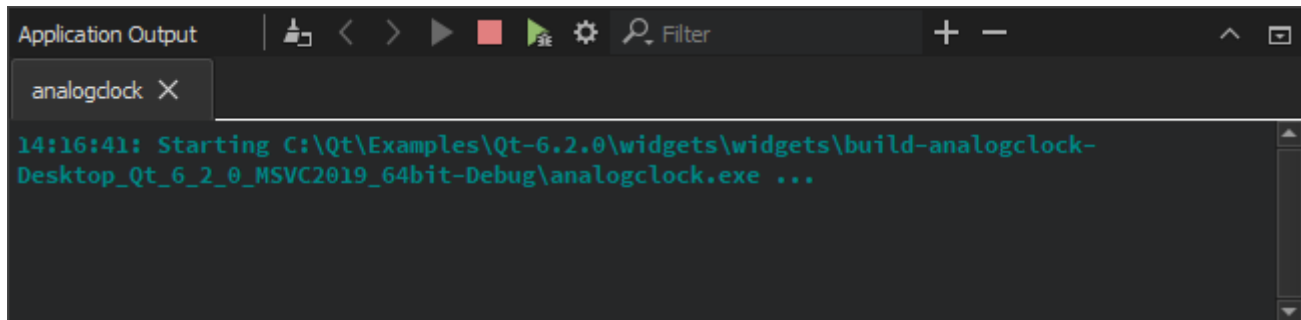


Select toolbar buttons to run applications, to attach the debugger to the running application, and to stop running or debugging.

To specify settings for displaying application output, select **Edit > Preferences > Build & Run > Application Output**,

or click the  (**Open Settings Page**) button. You can select whether to open **Application Output** on output when running or debugging applications, to clear old output on a new run, to word-wrap output, and to limit output to the specified number of lines.

Compile Output

Compile Output provides all output from the compiler. The **Compile Output** is a more detailed version of information displayed in [Issues](#).

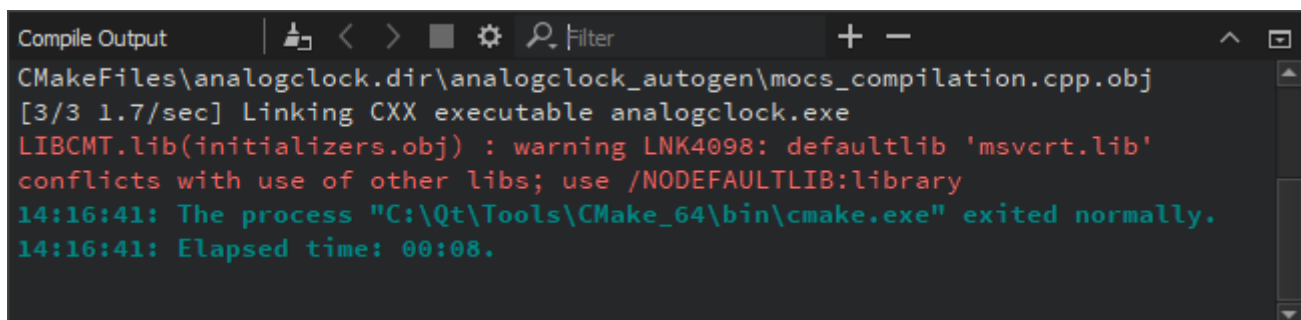

Double-click on a file name in an error message to open the file in the code editor.

Select the **Cancel Build** button to cancel the build.

To specify whether to open the **Compile Output** view on output when building applications, select **Edit > Preferences > Build & Run > Compile Output**, and then select the **Open Compile Output when building** check box. In the **Limit output to** field, you can specify the maximum amount of build output lines to display.


You can also open the preferences page by clicking  (**Open Settings Page**).

Parsing Existing Compile Output

You can use Qt Design Studio's output parsers to parse output from builds done outside of Qt Design Studio or stored from previous build runs. By default, the parsers from the kit selected for the active project are used, but you can select another kit.

To parse compile output:

1. Select **Tools > Parse Build Output**.

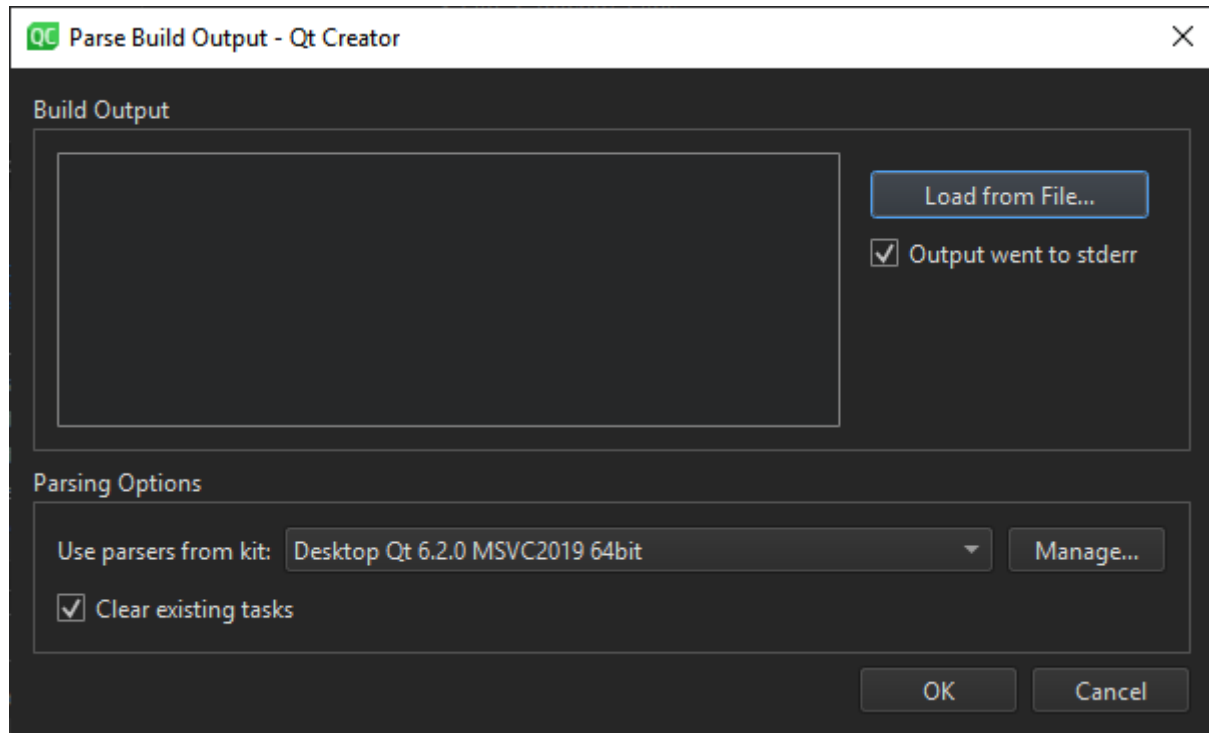

2. Paste the build output in the **Build Output** field, or select **Load from File** to load it from a file.
3. Deselect the **Output went to stderr** check box if the parser expects issues on `stdout`.
4. In the **Use parsers from kit** field, select the kit to use for parsing the output. Select **Manage** to view and modify kit settings.
5. The parser displays the parsed output in **Issues**. By default, the view is cleared before adding the new output. Deselect the **Clear existing tasks** check box to append the new output to the old output.
6. Select **OK** to start parsing.

[< Browsing Project Contents](#)

[Semantic Highlighting >](#)



Contact Us

Company

- About Us
- Investors
- Newsroom
- Careers
- Office Locations

Support

- Support Services
- Professional Services
- Partners
- Training

Community

- Contribute to Qt
- Forum
- Wiki
- Downloads
- Marketplace

Licensing

- Terms & Conditions
- Open Source
- FAQ

For Customers

- Support Center
- Downloads
- Qt Login
- Contact Us
- Customer Success