



# Configuring the Editor


You can configure the text editor to suit your specific needs by selecting **Edit > Preferences > Text Editor**.

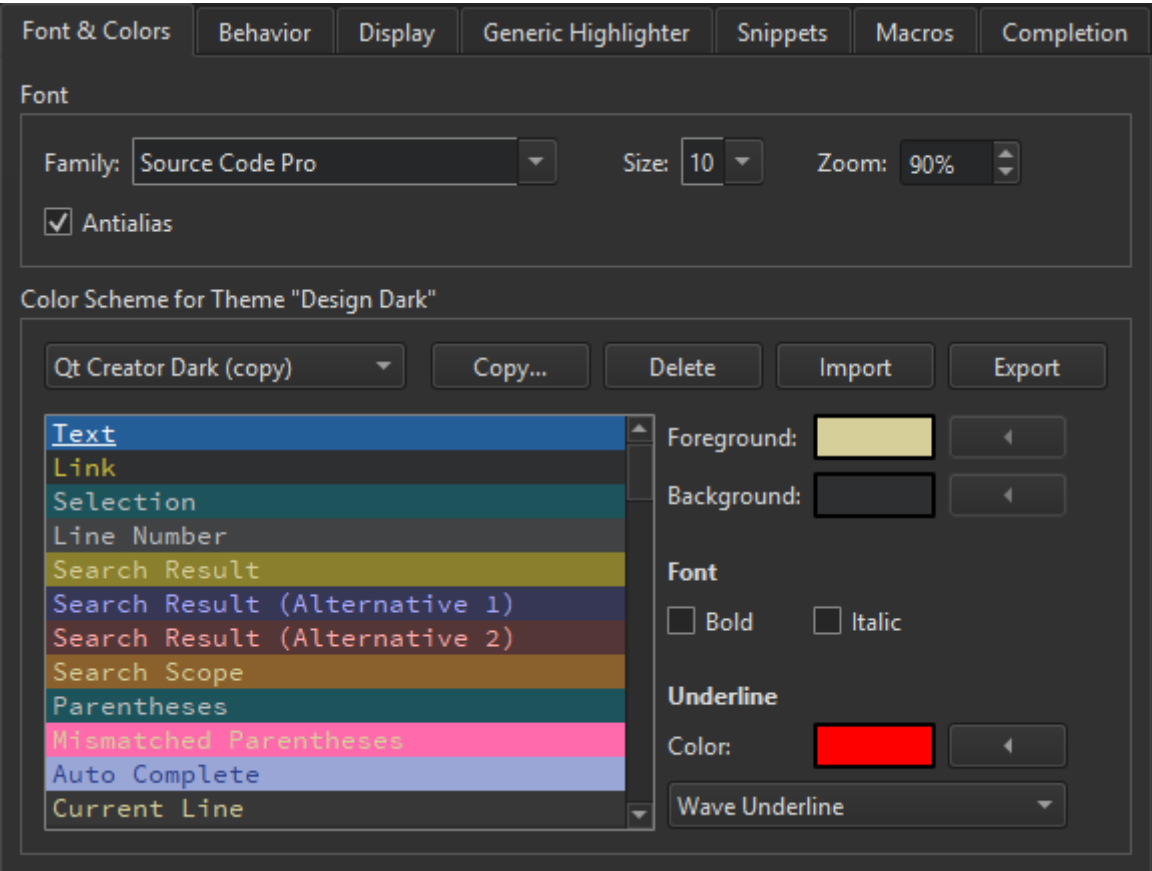

The settings you specify apply globally to all projects.

To specify editor behavior for an open project, select **Projects > Editor**.

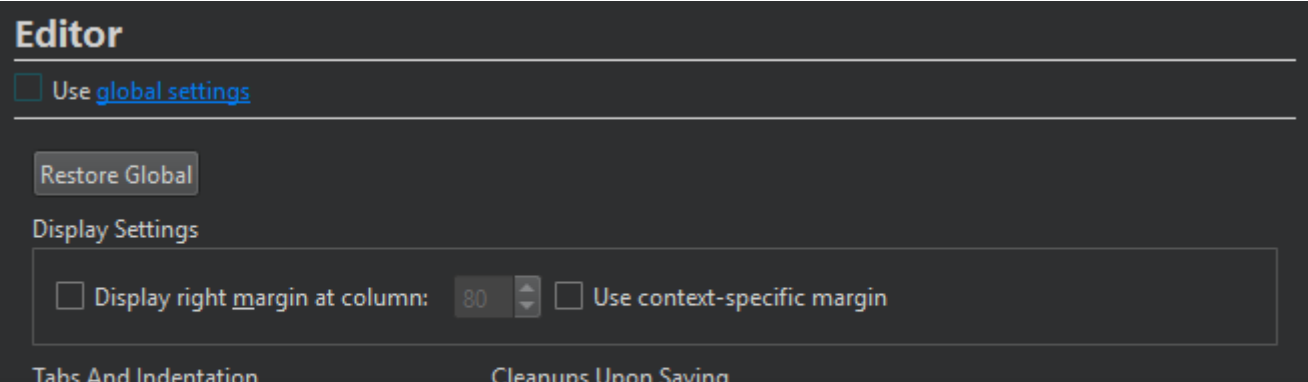

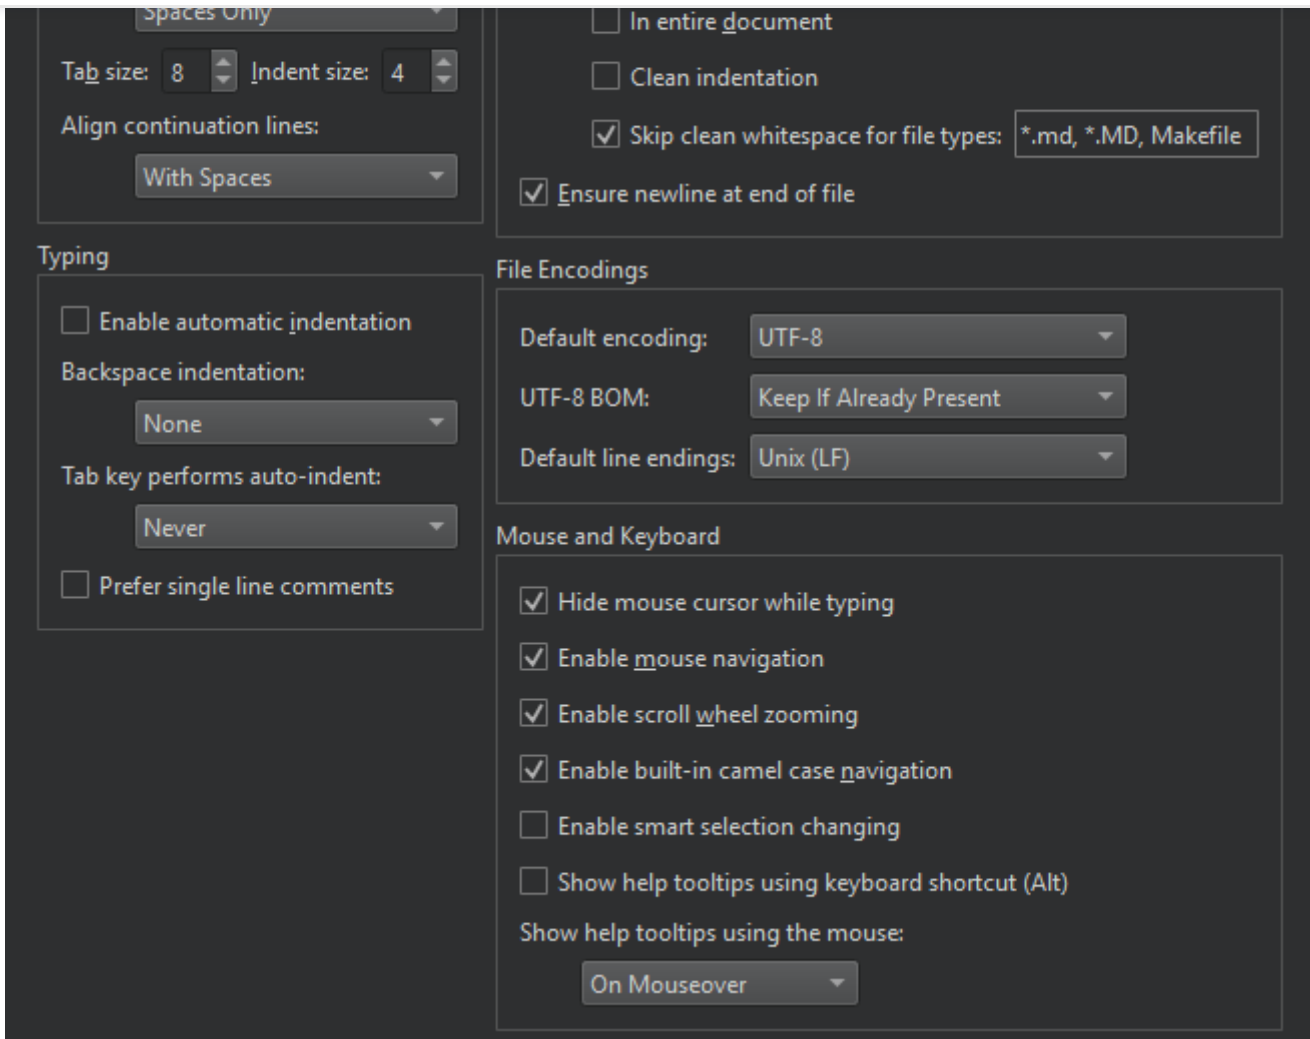

For more information, see [Specifying Editor Settings](#). You can also specify indentation settings separately for C++ and QML files either globally or for the open project. For more information, see [Indenting Text or Code](#).

You can perform the following configuration actions:

- › Set the [font preferences and apply color schemes](#) for syntax highlighting in **Font & Colors**.
- › Specify [definition files for syntax highlighting](#) for other types of files than C++ or QML in **Generic Highlighter**.
- › Set [tabs, indentation, the handling of whitespace, and mouse operations](#) in **Behavior**.
- › Set various display properties, such as [highlighting and folding blocks](#) or text wrapping in **Display**.
- › Add, modify, and remove [code snippets](#) in **Snippets**.
- › View and remove [text editing macros](#) in **Macros**.
- › Configure [code completion](#) in **Completion**.

## Related Topics

- › [Using FakeVim Mode](#)

Run the main editor in a manner similar to the Vim editor in the FakeVim mode.

[‹ Beautifying Source Code](#)

[Specifying Text Editor Settings ›](#)

by the Free Software Foundation. Qt and respective logos are trademarks of The Qt Company Ltd in Finland and/or other countries worldwide. All other trademarks are property of their respective owners.



Contact Us

Company

- About Us
- Investors
- Newsroom
- Careers
- Office Locations

Support

- Support Services
- Professional Services
- Partners
- Training

Community

- Contribute to Qt
- Forum
- Wiki
- Downloads
- Marketplace

Licensing

- Terms & Conditions
- Open Source
- FAQ

For Customers

- Support Center
- Downloads
- Qt Login
- Contact Us
- Customer Success