


Adding States

You can define states for components and component instances in the **States** view by selecting **+**.

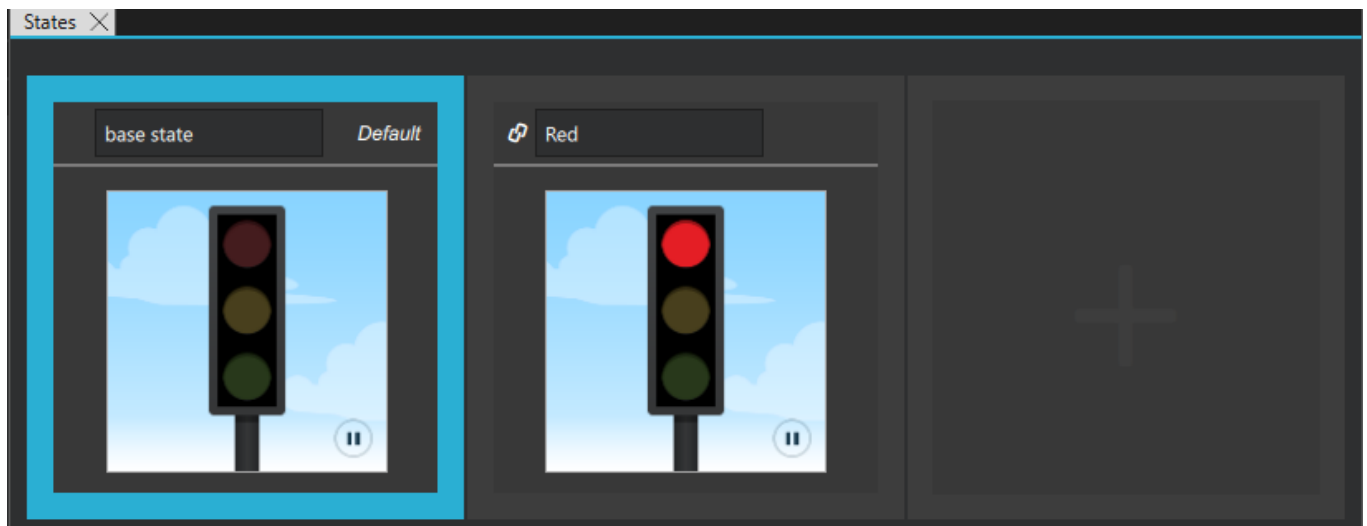



Click the new state to switch to it in the **2D** view, and then modify the values of the properties of components or component instances in **Properties**.

For example, to change the appearance of a button, you can define states in the button component to hide the button image and show another image in its place or to change the button background or text color. When you use instances of the button in other components, you can define states to create different screens by hiding or showing button component instances. The preset **Button** control in **Components > Qt Quick Controls > Controls** has predefined *normal* and *down* states.

This also applies to the custom button component that you can create by using a **wizard template**. For more information about editing the states within the button component and hiding and showing buttons to create several screens, see [Log In UI - Components](#) and [Log In UI - States](#). To add motion to a screen, you can change the position of a component instance in the **2D** view and then add animation to the change between the states.

The properties that you change in a state are highlighted with blue color. In the **Code** view, you can see the changes recorded as changes to the base state.

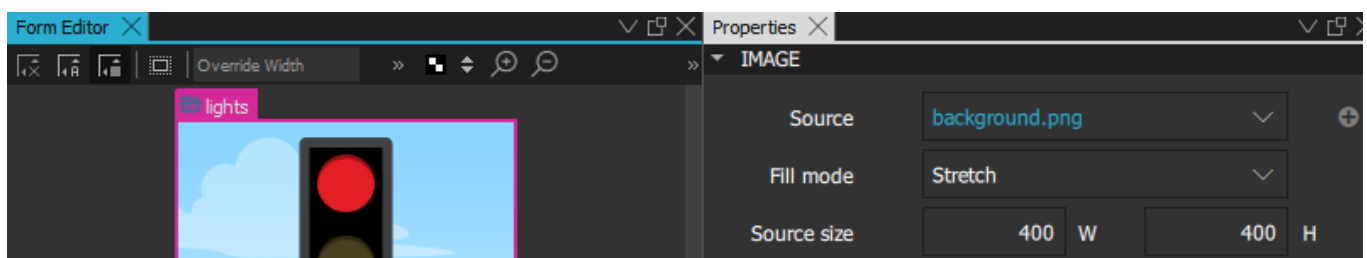

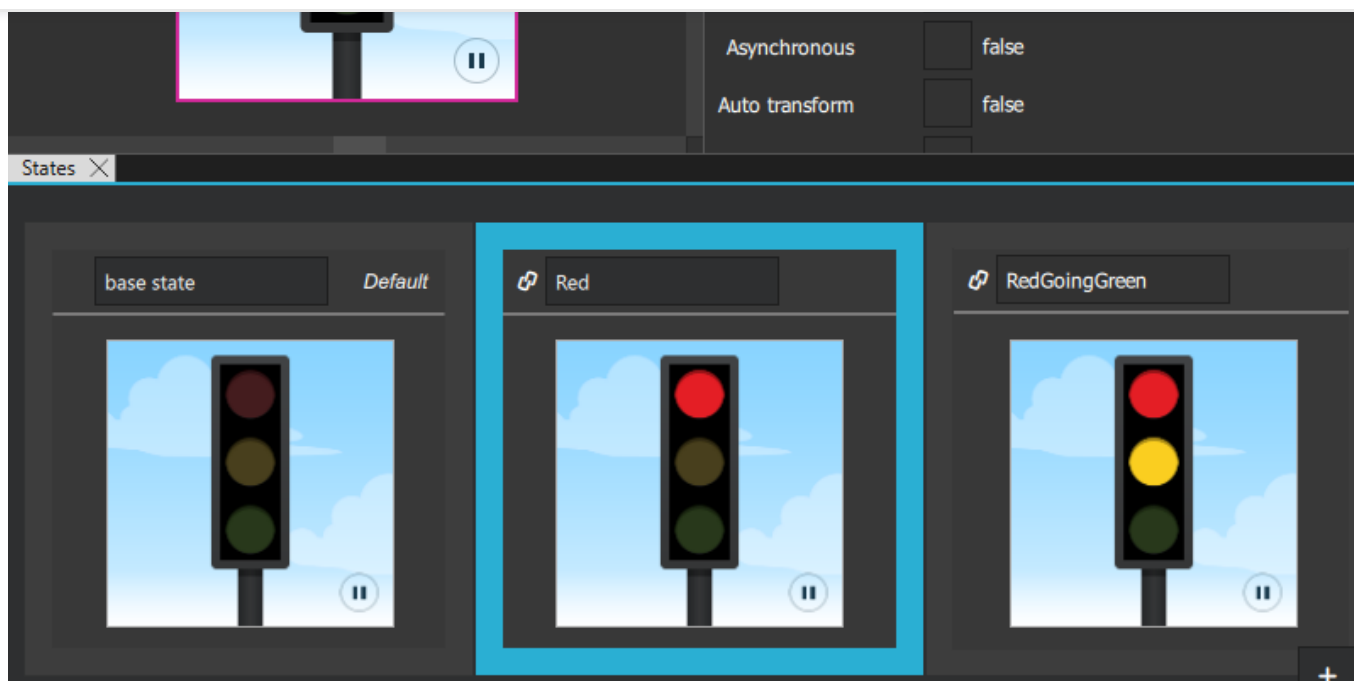

Note: If you have **locked a component** in **Navigator**, and you attempt to remove states where you change the values of its properties, you are prompted to confirm the removal.

For more information, watch the following video:

Setting the Default State

To determine the startup state of the application, select  to open the **Actions** menu, and then select **Set as Default**.

To reset the state later, select **Actions > Reset Default**.


Applying States

To determine when a state should be applied, select **Actions > Set when Condition**. In **Binding Editor**, specify a **when** property for the state. Set the value of the property to a boolean expression that evaluates to `true` when you want the state to be applied.

when these conditions apply. You can evaluate whether something is true or false, greater than or equal to something else, and so on. You can also use operators, such as AND or OR, to evaluate the truthfulness of several components.

The when conditions are evaluated from left to right and in order of appearance in the code. Therefore, if you have two conditions for two different states that both evaluate to `true`, the first state is applied.

In **Binding Editor**, select the component and property to create the expression. For example, to change the state when a button is pressed, you could select a button component and its pressed property.

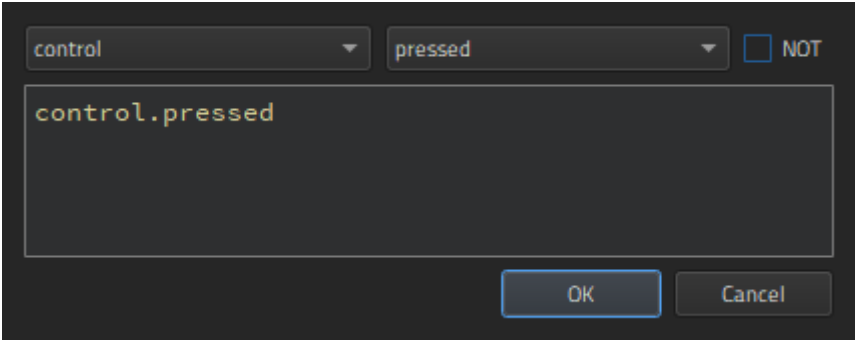

When you compose the expressions in **Binding Editor**, the **code completion** feature lists the components and their properties you can use in the expressions.

Summary of Logical Operators

You can use the following **logical operators** in the expressions to combine several conditions in one expression:

Operator	Meaning	Evaluates to <code>true</code> if
<code>!</code>	NOT	The condition is not met.
<code>&&</code>	AND	Both conditions are met.
<code> </code>	OR	Either of the conditions is met.
<code><</code>	Less than	The left operand is less than the right operand.
<code>></code>	Greater than	The left operand is greater than the right operand.
<code>>=</code>	Greater than or equal	The left operand is greater than or equal to the right operand.
<code><=</code>	Less than or equal	The left operand is less than or equal to the right operand.
<code>==</code>	Equal	The operands are equal.
<code>===</code>	Strict equal	The operands are equal and of the same type.
<code>!=</code>	Not equal	The operands are not equal.
<code>!==</code>	Strict not equal	The operands are of the same type but not equal, or are of different type.


Alternatively, you can use **And Operator**, **Or Operator**, and **Not Operator** components to bind property values using the boolean AND, OR, and NOT operator. For more information, see [Logic Helpers](#).

In addition, you can use arithmetic operators to compare numbers before checks. However, we recommend that you create separate properties for this purpose whenever possible.

Examples of when Conditions

```
when: control.pressed
```

To apply a state when the button is not pressed, select the **NOT** check box.

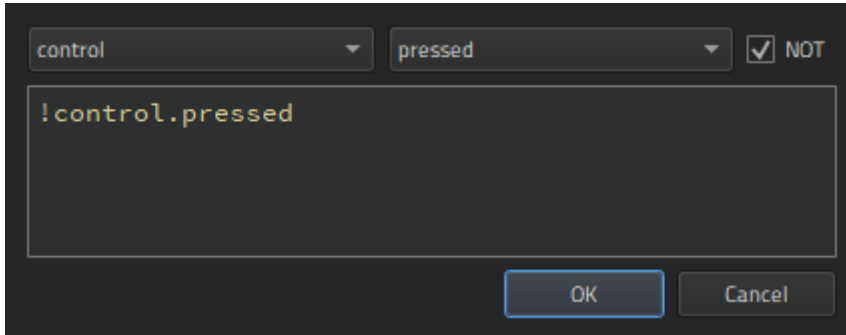

To apply a state when the button is not pressed, selected, nor hovered on, you could combine conditions, as follows:

```
when: !control.pressed && !control.checked && !control.hovered
```

To apply a state when the button is pressed or selected, but not hovered on, you could write:

```
when: control.pressed || control.checked && !control.hovered
```


If you are not familiar with writing expressions, you can use preset **logic helpers** from **Components > Qt Quick Studio Logic Helper**.

Using States


To keep the code clean, you should create a base state that contains all the components you will need in the application. You can then create states, in which you hide and show a set of components and modify their properties. This allows you to:

- Align components on different views with each other.
- Avoid excessive property changes. If a component is invisible in the base state, you must define all changes to its child components as property changes, which leads to complicated code.
- Minimize the differences between the base state and the other states to keep the code short and readable and to improve performance.
- Avoid problems when using transitions and animation when changing states.

To create views for an application by using states:

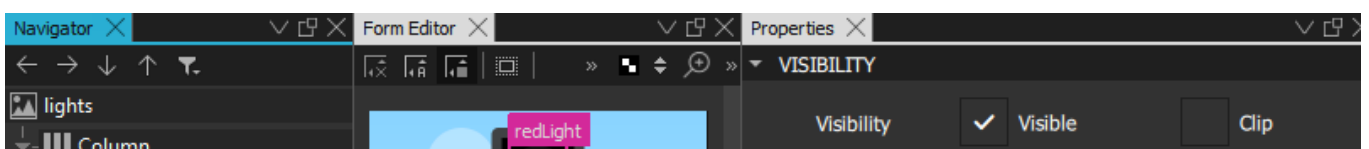



1. In the base state, add all components you will need in the application (1). While you work on one view, you can click the  icon in [Navigator](#) to hide components on the canvas that are not part of a view.
2. In **States**, select the **+** symbol to create a new state and give it a name. For example, `Normal`.
3. In [Properties](#) (2), deselect the **Visibility** check box or set **Opacity** to 0 for each component that is not needed in this view. If you specify the setting for the parent component, all child components inherit it and are also hidden.
4. Create additional states for each view and set the visibility or opacity of the components in the view.
5. To determine which state is applied when the application starts, select **Actions** > **Set as Default**.

[< Specifying Custom Properties](#)

[Validating with Target Hardware >](#)



Contact Us

Company

About Us
Investors

Licensing

Terms & Conditions
Open Source



Office Locations

Support

- Support Services
- Professional Services
- Partners
- Training

For Customers

- Support Center
- Downloads
- Qt Login
- Contact Us
- Customer Success

Community

- Contribute to Qt
- Forum
- Wiki
- Downloads
- Marketplace

© 2022 The Qt Company

[Feedback](#) [Sign In](#)