

Fecha: 27/02/2026


Proyecto: Entrega Proyecto Final

Tester: Edgar Jonathan Vargas


Herramienta usada: Postman

Casos con respuesta negativa:


- 1) Se usa un GET, el cual responde con un 404 Not Found (No encontrado)
Debido a la una mala escritura en el endpoint “Charizar”, la forma correcta seria “Charizard”.

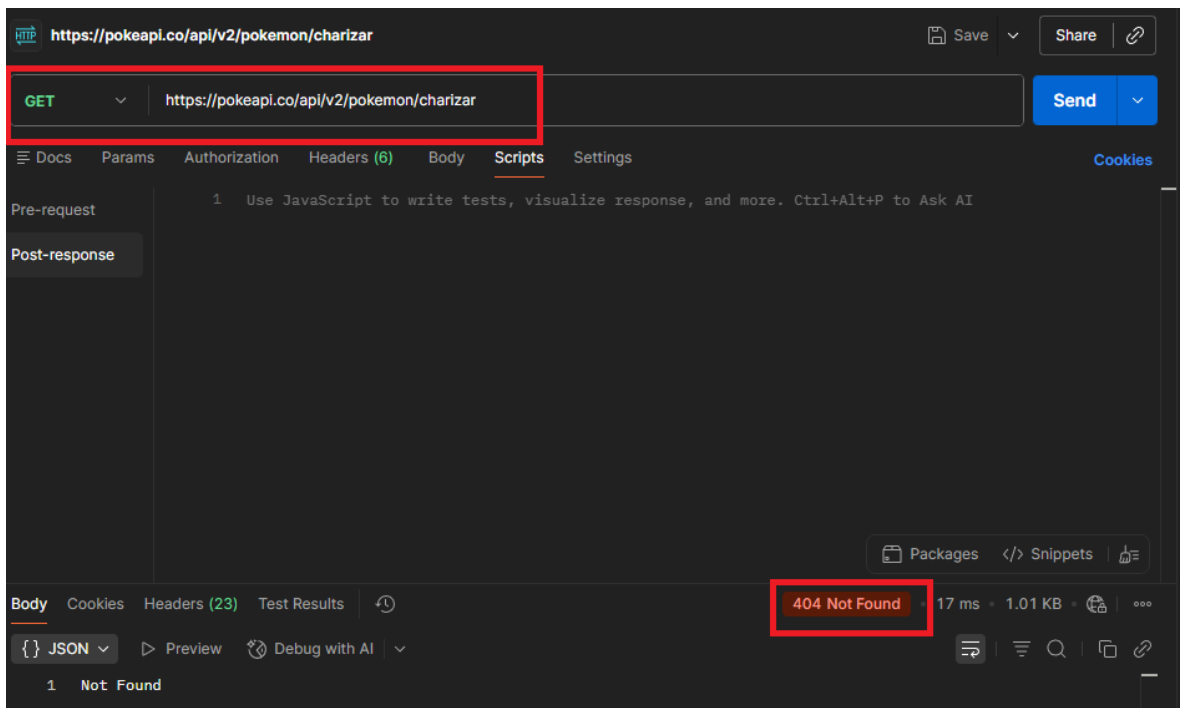

- 2) Se usa un GET, el cual responde con un 400 Bad Request (Solicitud Incorrecta) debido a una mala escritura en el endpoint, el cual no es válido en la documentación de la API.

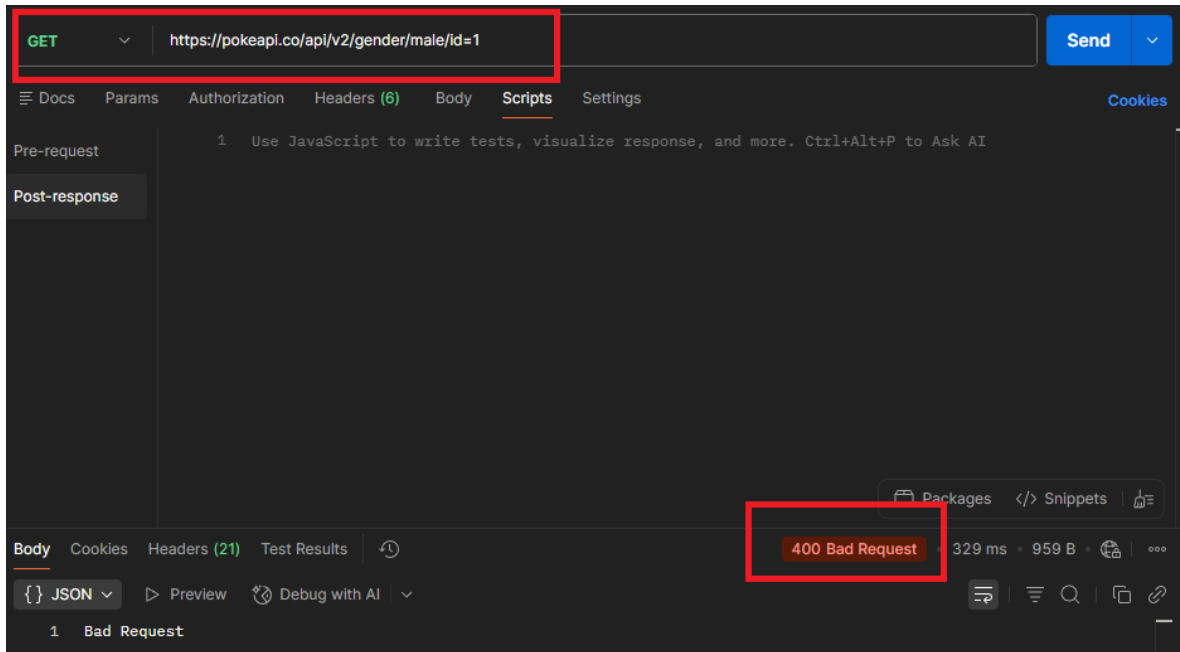

- 3) Se usa un GET, el cual responde con un 400 Bad Request (Solicitud Incorrecta) debido a una mala escritura en el endpoint, “MOVE”, debería ser escrito en minúscula respetando la documentación.

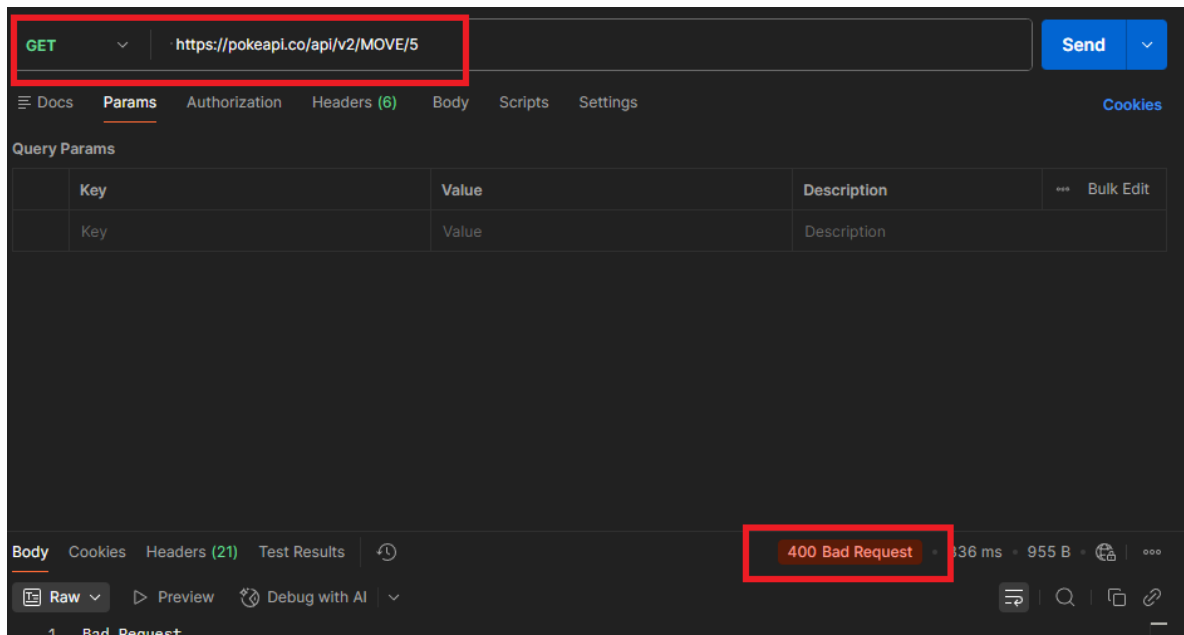

- 4) Se usa un DELETE, el cual responde con un 404 Not Found, esto debido a que la API al ser de uso publico no permite instrucciones de tipo DELETE (Eliminar).

The screenshot shows a REST client interface with a DELETE request to `https://pokeapi.co/api/v2/pokemon-habitat/3/`. The response is a 404 Not Found status. The response body is an HTML error page.

Request:

- Method: DELETE
- URL: `https://pokeapi.co/api/v2/pokemon-habitat/3/`

Response:

- Status: 404 Not Found
- Time: 220 ms
- Size: 1.11 KB

Response Body (HTML):

```
1 <!DOCTYPE html>
2 <html lang="en">
3
4 <head>
5   <meta charset="utf-8">
6   <title>Error</title>
7 </head>
8
9 <body>
10   <pre>Cannot DELETE /api/v2/pokemon-habitat/3/</pre>
11 </body>
12
13 </html>
```

- 5) Se usa un GET, el cual responde con un 400 Bad Request (Solicitud Incorrecta) debido a una mala escritura en el endpoint, la forma correcta seria “pokemon-habitat”, respetando el guion.

The screenshot shows a REST client interface with a dark theme. At the top, a red box highlights the request configuration: the method is 'GET' and the URL is 'https://pokeapi.co/api/v2/pokemonhabitat/3'. Below this, the 'Params' tab is selected, showing an empty 'Query Params' table. At the bottom, the 'Body' tab is active, displaying a red box with the text '400 Bad Request'. To the right of this box, the response details are shown: '311 ms', '952 B', and a status icon. Below the response details, there are buttons for 'Raw', 'Preview', and 'Debug with AI'. At the very bottom, the text '1 Bad Request' is visible.

Key	Value	Description
Key	Value	Description

Key	Value	Description
Key	Value	Description

400 Bad Request • 311 ms • 952 B

1 Bad Request

Casos con respuesta positiva:

- 1) Se usa GET para pedir el pokemon con nombre Charizard.

The screenshot shows a REST client interface with the URL `https://pokeapi.co/api/v2/pokemon/charizard` and the method `GET` selected. The response status is `200 OK`, indicating a successful request. The response body is displayed in JSON format, showing the abilities of Charizard.

```
{
  "abilities": [
    {
      "ability": {

```

- 2) Se usa GET para pedir el movimiento con Id 5.

The screenshot shows a REST client interface with the URL `https://pokeapi.co/api/v2/move/5` and the method `GET` selected. The response status is `200 OK`, indicating a successful request. The response body is displayed in JSON format, showing the accuracy and contest combos of move 5.

```
{
  "accuracy": 85,
  "contest_combos": {

```

3) Se usa GET para pedir hábitat con Id 3.

The screenshot shows a REST client interface with the URL `https://pokeapi.co/api/v2/pokemon-habitat/3/` and the method `GET` highlighted with a red box. The response status is `200 OK`, also highlighted with a red box. The response body is in JSON format, showing the habitat details for ID 3.

Key	Value	Description
Key	Value	Description

```
{
  "id": 3,
  "name": "grassland",
  "names": [

```

4) Se usa GET para pedir la cadena de evolución con Id 22.

The screenshot shows a REST client interface with the URL `https://pokeapi.co/api/v2/evolution-chain/22/` and the method `GET` highlighted with a red box. The response status is `200 OK`, also highlighted with a red box. The response body is in JSON format, showing the evolution chain details for ID 22.

Key	Value	Description
Key	Value	Description

```
{
  "baby_trigger_item": null,
  "chain": {
    "evolution_details": [],
    "evolves_to": [

```

5) Se usa GET para pedir la ubicación con Id 36.

The screenshot shows a REST client interface with a dark theme. At the top, the HTTP method is set to 'GET' and the URL is 'https://pokeapi.co/api/v2/location/36/'. A red box highlights the method and URL. Below this, the 'Params' tab is active, showing an empty table with columns 'Key', 'Value', and 'Description'. The 'Body' tab is also visible. At the bottom, the 'Body' tab is selected, showing the JSON response. A red box highlights the status '200 OK' in the top right of the response area. The JSON response is as follows:

```
1 {
2   "areas": [
3     {
4       "name": "sinnoh-route-206-area",
5       "url": "https://pokeapi.co/api/v2/location-area/648/"
6     }
7   ]
8 }
```

