

## 1. CONSOLA por medio de CURL

### 1. Creaciòn usuario

```
macbookair@MacBook-Air-de-Macbook ~ %  
macbookair@MacBook-Air-de-Macbook ~ %  
macbookair@MacBook-Air-de-Macbook ~ %  
macbookair@MacBook-Air-de-Macbook ~ %  
macbookair@MacBook-Air-de-Macbook ~ %  
macbookair@MacBook-Air-de-Macbook ~ %  
macbookair@MacBook-Air-de-Macbook ~ %  
macbookair@MacBook-Air-de-Macbook ~ %  
macbookair@MacBook-Air-de-Macbook ~ % curl -X POST "https://uql9xumqp5.execute-a  
pi.us-east-1.amazonaws.com/p1/users" \  
-H "Content-Type: application/json" \  
-d '{  
  "user": {  
    "name": "Juan Perez",  
    "email": "juan.perez@mail.com",  
    "status": "ACTIVE"  
  }  
'  
{  
  "id": "user-1762571621209", "name": "Juan Perez", "email": "juan.perez@mail.com", "ph  
one": null, "status": "ACTIVE"}  
macbookair@MacBook-Air-de-Macbook ~ %  
macbookair@MacBook-Air-de-Macbook ~ %  
macbookair@MacBook-Air-de-Macbook ~ %
```

### 2. Listar usuarios creados

```
macbookair@MacBook-Air-de-Macbook ~ %  
pi.us-east-1.amazonaws.com/p1/users" \  
-H "Content-Type: application/json" \  
-d '{  
  "user": {  
    "name": "Juan Perez",  
    "email": "juan.perez@mail.com",  
    "status": "ACTIVE"  
  }  
'  
{  
  "id": "user-1762571621209", "name": "Juan Perez", "email": "juan.perez@mail.com", "ph  
one": null, "status": "ACTIVE"}  
macbookair@MacBook-Air-de-Macbook ~ %  
macbookair@MacBook-Air-de-Macbook ~ %  
macbookair@MacBook-Air-de-Macbook ~ % curl -X GET "https://uql9xumqp5.execute-ap  
i.us-east-1.amazonaws.com/p1/users?action=list" \  
-H "Content-Type: application/json"  
[  
  {  
    "id": "user-1762571621209", "name": "Juan Perez", "email": "juan.perez@mail.com", "p  
hone": null, "status": "ACTIVE"}  
  ]  
macbookair@MacBook-Air-de-Macbook ~ %  
macbookair@MacBook-Air-de-Macbook ~ %  
macbookair@MacBook-Air-de-Macbook ~ %  
macbookair@MacBook-Air-de-Macbook ~ %
```

### 3. Creaciòn Driver

```

macbookair ~ % curl -X POST "https://uql9xumqp5.execute-api.us-east-1.amazonaws.com/p1/drivers" \
-H "Content-Type: application/json" \
-d '{
  "driver": {
    "name": "Carlos Lopez",
    "licenseNumber": "ABC12345",
    "status": "AVAILABLE",
    "vehicle": {
      "plate": "XYZ123",
      "model": "Toyota Prius",
      "color": "White"
    },
    "location": {
      "lat": 4.65,
      "lng": -74.05
    }
  }
}'
{"id":"driver-1762572014870","name":"Carlos Lopez","licenseNumber":"ABC12345","status":"AVAILABLE","vehicle":{"plate":"XYZ123","model":"Toyota Prius","color":"White"},"location":{"lat":4.65,"lng":-74.05}}
macbookair@MacBook-Air-de-Macbook ~ %
macbookair@MacBook-Air-de-Macbook ~ %

```

#### 4. creaci3n trip

```

"color": "White"
},
"location": {
  "lat": 4.65,
  "lng": -74.05
}
}'
[{"id":"driver-1762572014870","name":"Carlos Lopez","licenseNumber":"ABC12345","status":"AVAILABLE","vehicle":{"plate":"XYZ123","model":"Toyota Prius","color":"White"},"location":{"lat":4.65,"lng":-74.05}}]
macbookair@MacBook-Air-de-Macbook ~ %
macbookair@MacBook-Air-de-Macbook ~ % curl -X POST "https://uql9xumqp5.execute-api.us-east-1.amazonaws.com/p1/rides" \
-H "Content-Type: application/json" \
-d '{
  "ride": {
    "riderId": "user-1762571621209",
    "fare": 5000
  }
}'
{"id":"ride-1762572213523","riderId":"user-1762571621209","driverId":null,"fare":5000.0,"status":"REQUESTED"}
macbookair@MacBook-Air-de-Macbook ~ %

```

#### 5. Cambios de estados del ride


```
macbookair ~ % curl -X POST "https://uql9xumqp5.execute-ap
i.us-east-1.amazonaws.com/p1/rides" \
-H "Content-Type: application/json" \
-d '{
  "ride": {
    "riderId": "user-1762571621209",
    "fare": 5000
  }
}'
{"id": "ride-1762572213523", "riderId": "user-1762571621209", "driverId": null, "fare":
5000.0, "status": "REQUESTED"}
macbookair ~ % curl -X PUT "https://uql9xumqp5.execute-ap
i.us-east-1.amazonaws.com/p1/rides" \
-H "Content-Type: application/json" \
-d '{
  "id": "ride-1762572213523",
  "status": "IN_PROGRESS"
}'
{"id": "ride-1762572213523", "riderId": "user-1762571621209", "driverId": null, "fare":
5000.0, "status": "IN_PROGRESS"}
macbookair ~ %
```

## 6. Payment


[illegible]

**PAGINA WEB**


## 1. CREACION USER

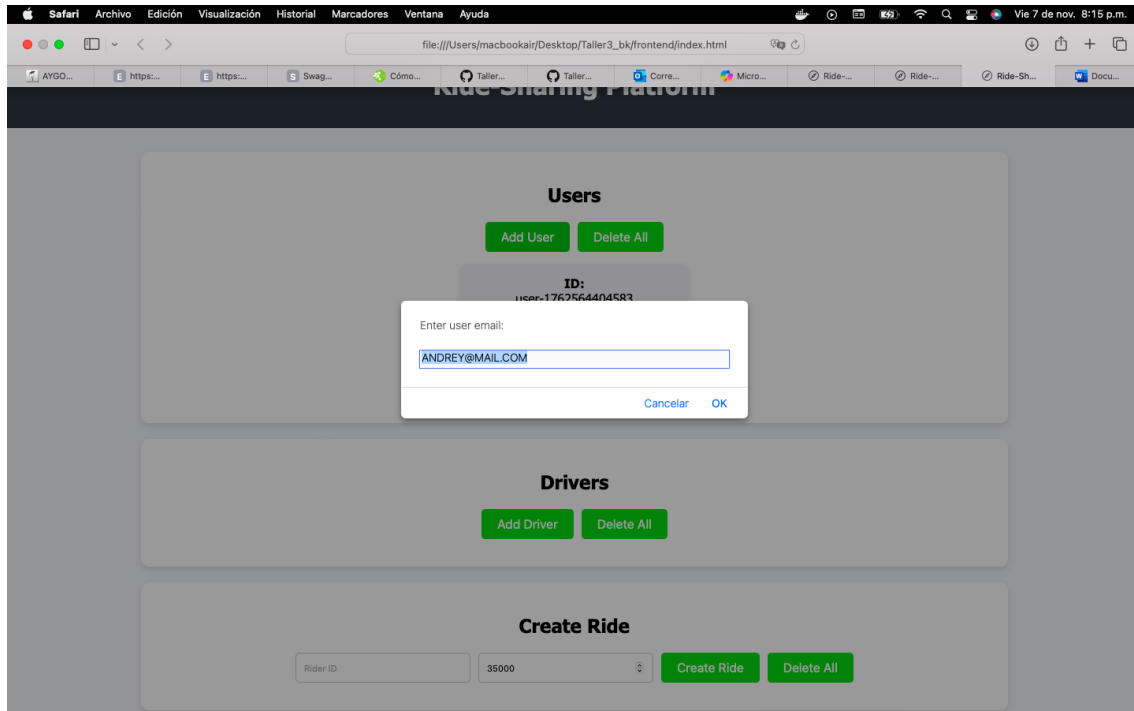


## 2. CREACION DRIVER

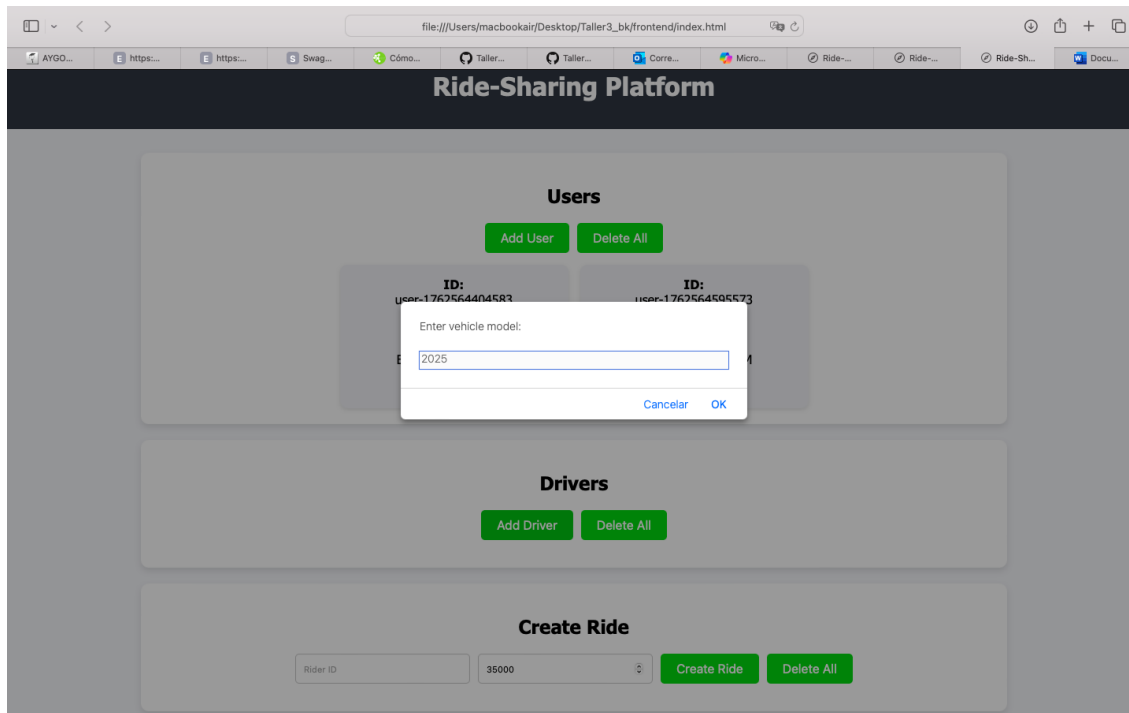


### 3. CREACION RIDER

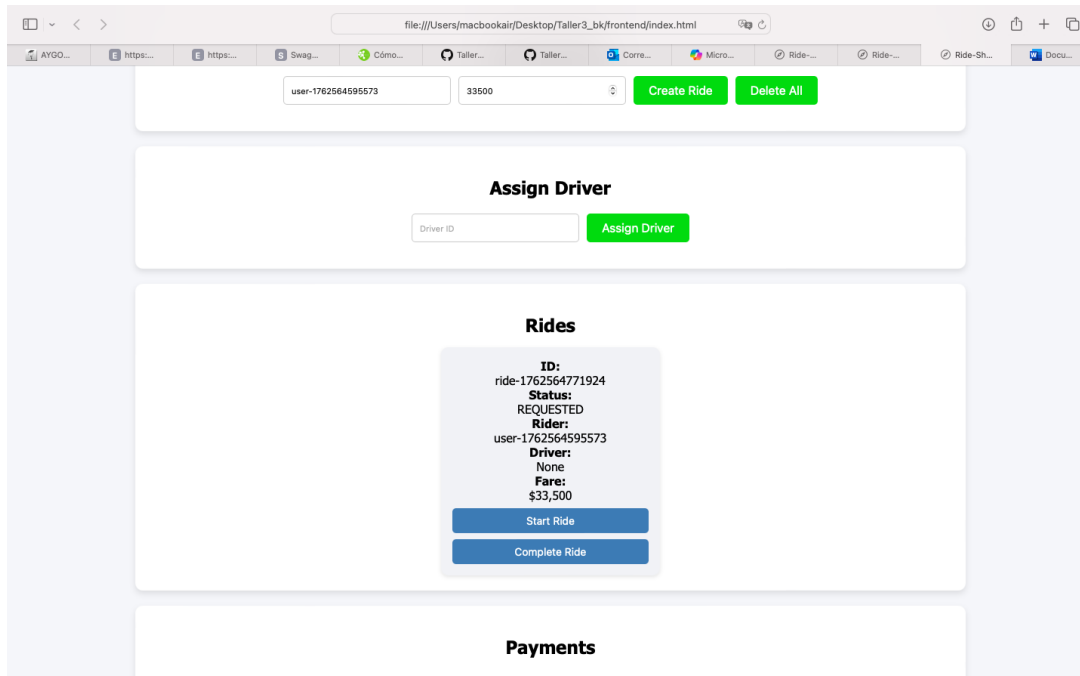


--EVIDENCIA DE LAS CREACIONES

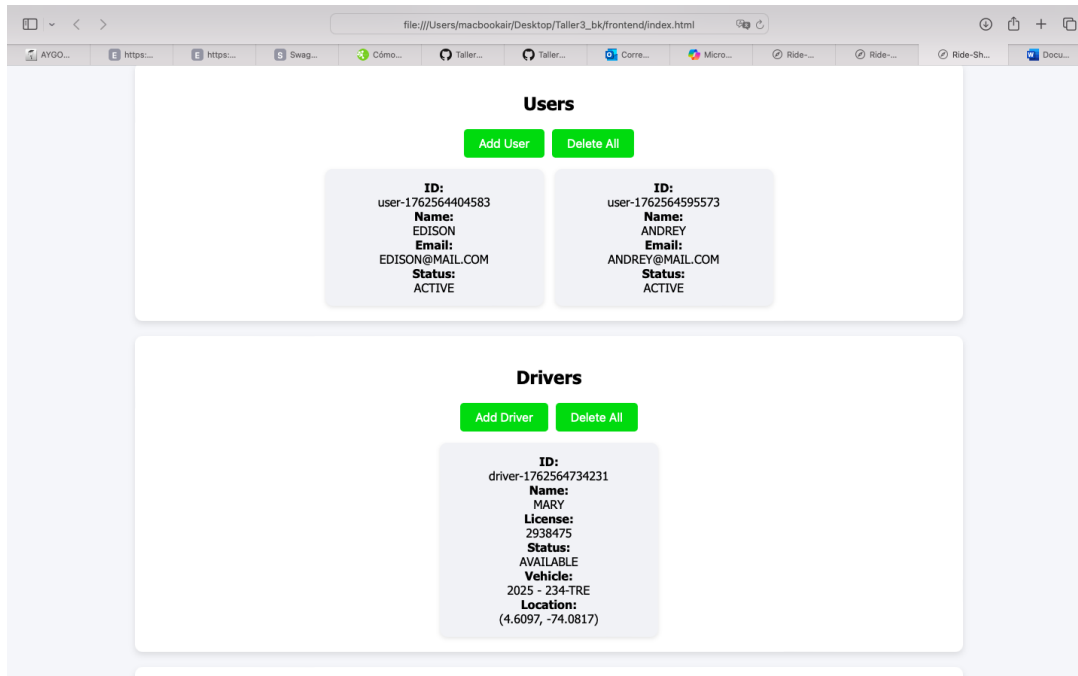


4. Asignar Driver al Ride y cambio de estado del ride de REQUESTED a ACCEPTED y cambio de estado del driver de AVAILABLE a BUSY

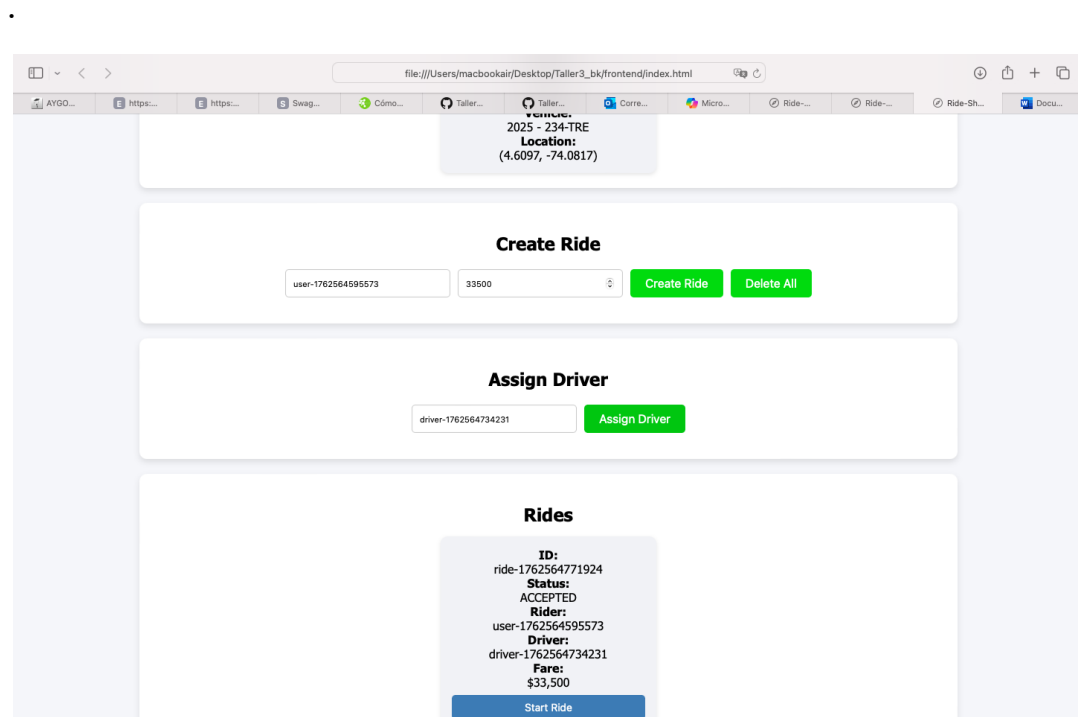

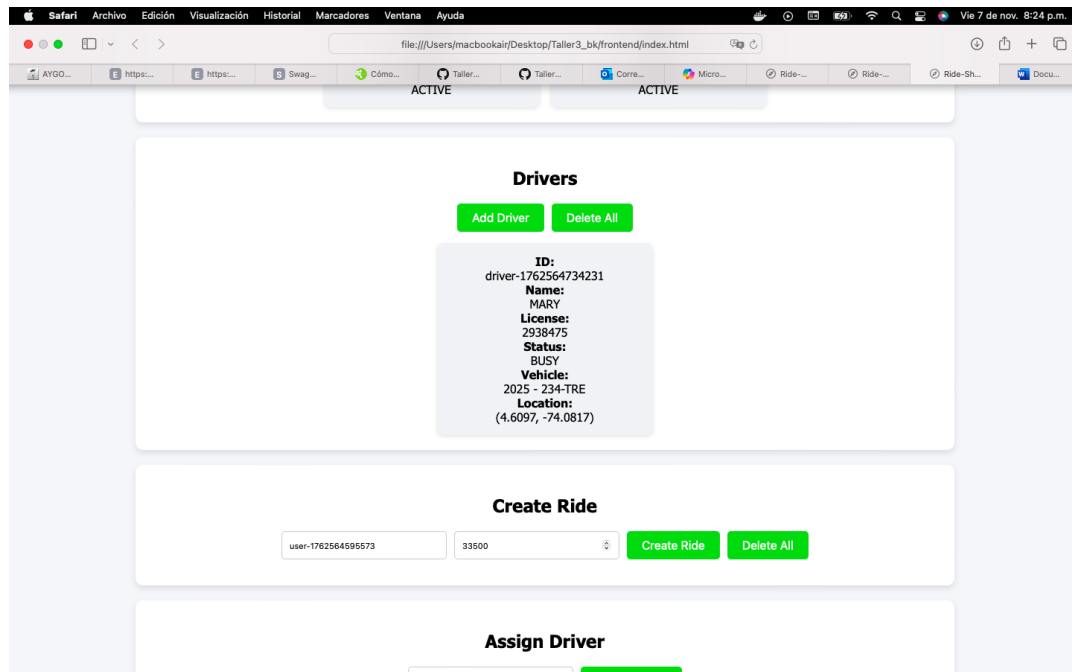


5. STAR RIDE, cambia el estado del RIDE de ACCEPTED a IN\_PROGRESS

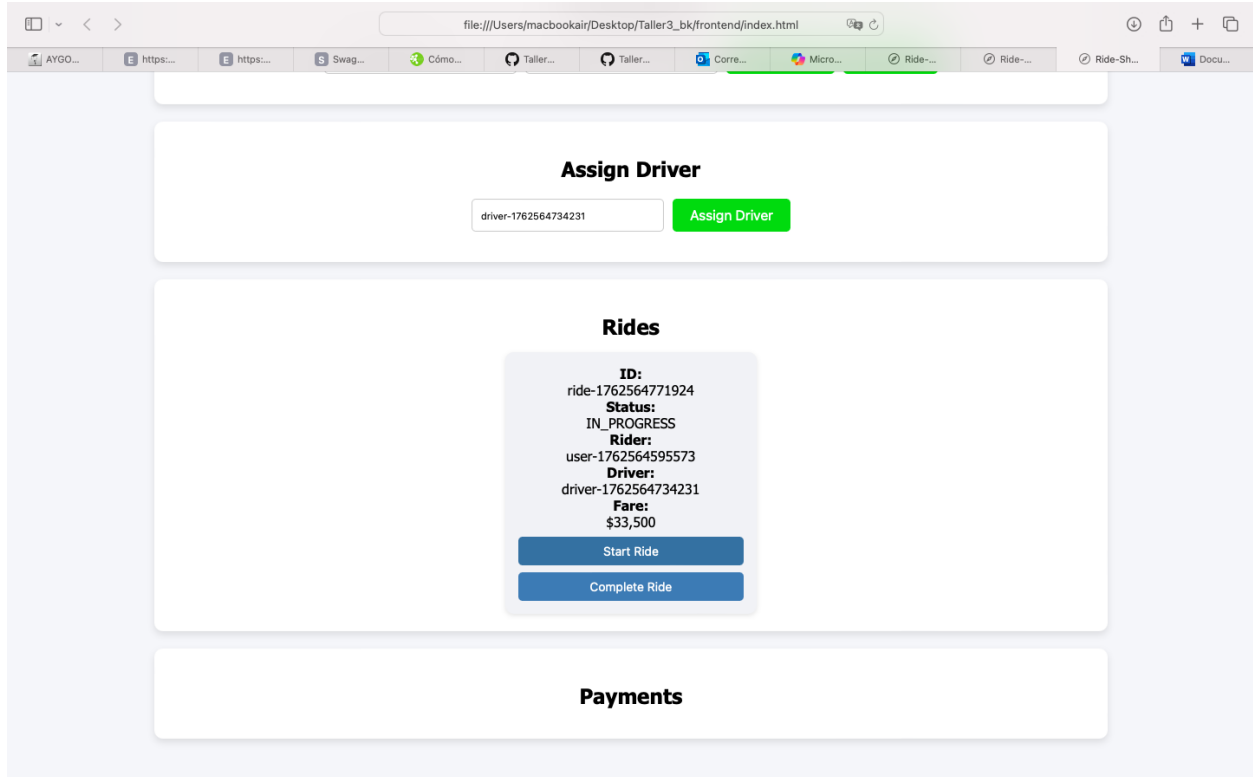

6. COMPLETE RIDE, cambia el estado del RIDE de IN\_PROGRESS a COMPLETED y cambia el estado del driver de BUSY a AVAILABLE



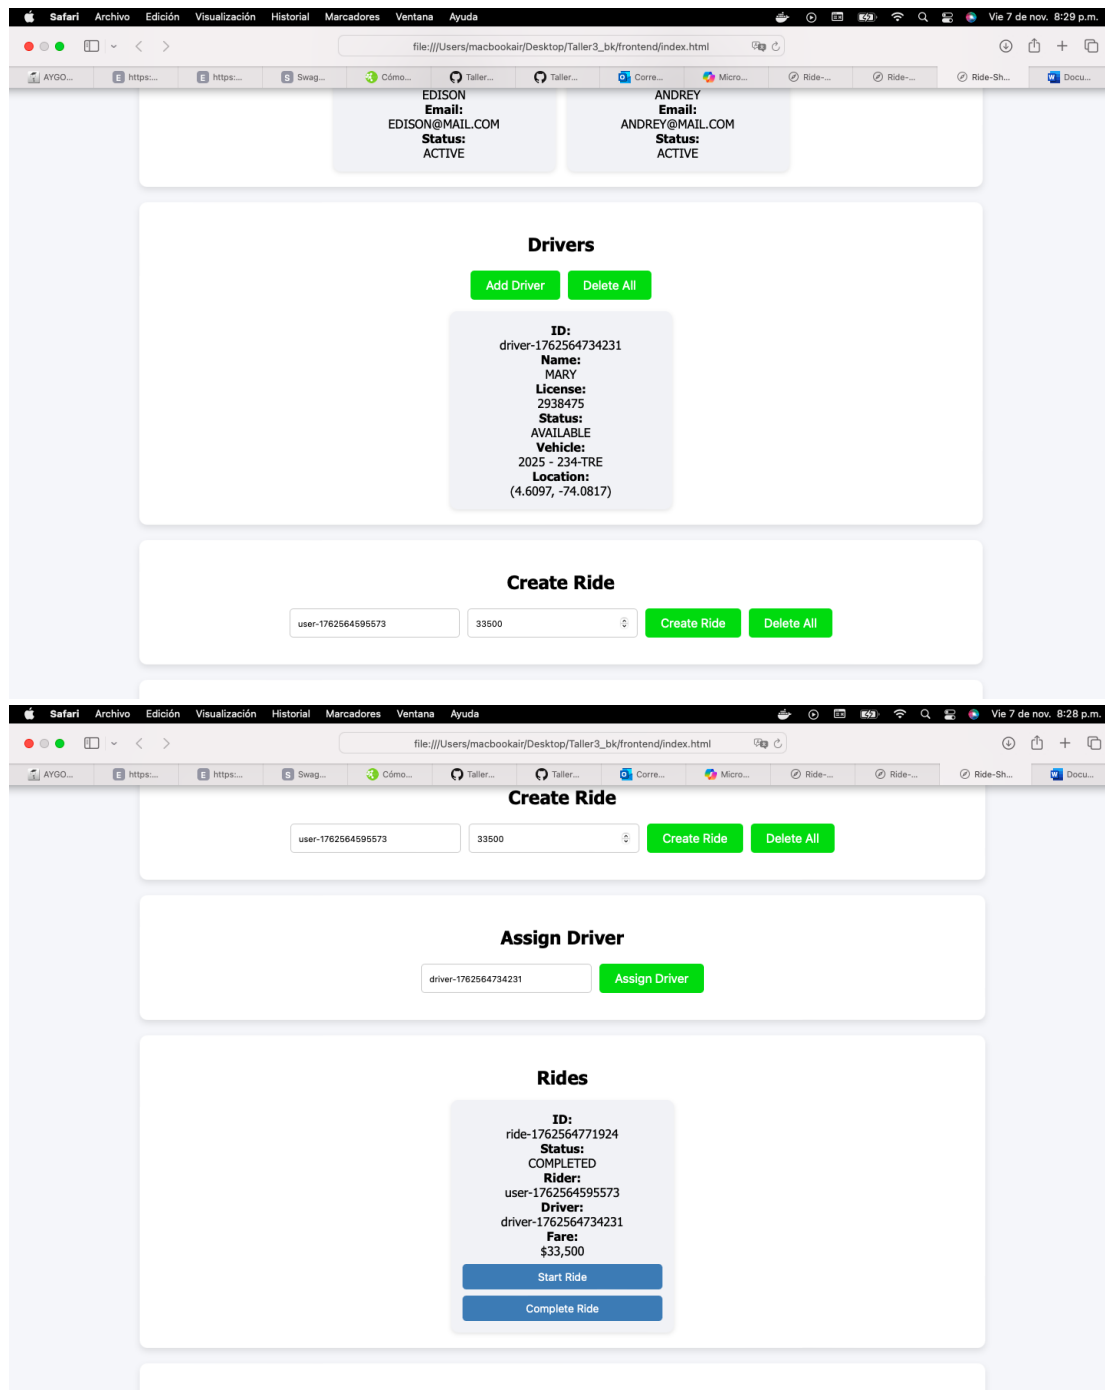

7. Paso al cobro una vez el ride está en estado COMPLETED

