

Relazione Algoritmi e Strutture Dati

Francesco Mauro, matricola: 949471

A.A. 2022/2023

Contents

1	Mege Binary Insertion Sort	2
1.1	Mege Binary Insertion Sort implementation	2
1.1.1	Introduction	2
1.1.2	Testing methodolgy	2
2	Skip List	3
2.1	Introduction	3
3		
2.3	Conclusion based on the analysis	3
2.4	Knwon Issues	3
3	Priority Queue and Primm Algorithm	5

Chapter 1

Mege Binary Insertion Sort

1.1 Mege Binary Insertion Sort implementation

1.1.1 Introduction

The purpose of this report is to provide the tests that have been done to find the best value of K for the Merge Binary Insertion Sort algorithm. Considering that Merge Binary Insertion Sort is a hybrid algorithm that has ability to handle large input and for its speed, but it became inefficient when having a small input, in the case of small input the library switch to Binary Insertion sort, that is more efficient on small input.

1.1.2 Testing methodolgy

Chapter 2

Skip List

2.1 Introduction

The purpose of this chapter is to report the tests that have been done to find the best value of `height` in a Skip List. Skip List is a probabilistic data structure that allows searching, insertion and deleting operation with time complexity of $O(\log n)$.

2.2 Testing methodology¹

I wrote a bash script² that runs the program with different values of `height` and saves the output in a file, the range of tested level is between 6 and 50

¹all test are done on a Lenovo Thinkpad x390 yoga with an Intel Core i7-8565U CPU and 16GB of RAM, with Arch Linux installed as only OS

²Included in the repo,the name is **`time_taker_ex2.sh`**

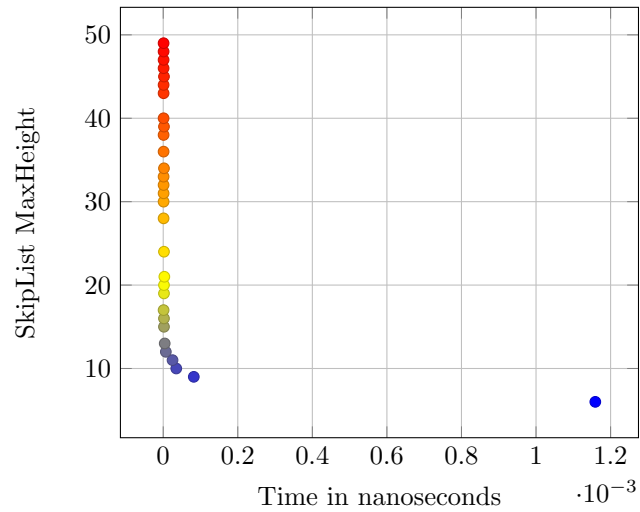


Figure 2.1: Graph 1: SkipList Max-Height vs. Time

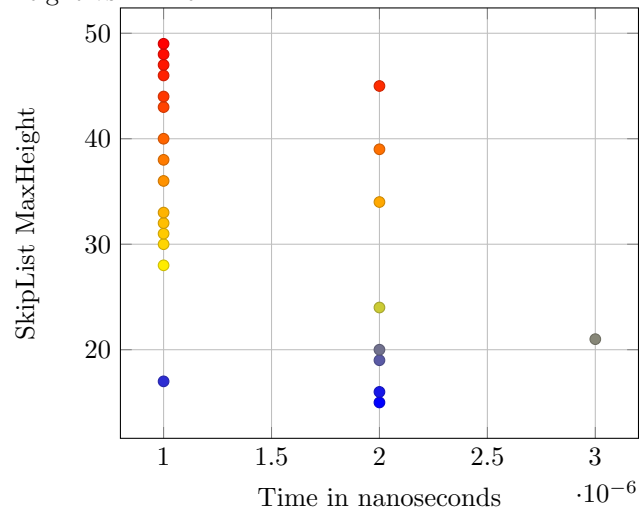


Figure 2.2: Graph 2: SkipList Max-Height vs. Time (Focused)

Range from 1 to 5 is omitted because the algorithm did not terminate for those values

2.3 Conclusion based on the analysis

Looking the graph the best values is between 15 and 20, because this range is the good balance between the time used to search the words in the skip list and the memory used.

2.4 Known Issues

Sometimes the main program gives a segmentation fault error caused by the `fgets()`, used to read the phrase to correct, on 50 run the program gave segmentation fault 7 times.

Chapter 3

Priority Queue and Primm Algorithm