

Available online at www.sciencedirect.com

ScienceDirect

journal homepage: www.elsevier.com/locate/cosrev

Review Article

An overview of self-adaptive technologies within virtual reality training



Neil Vaughan*, Bodgan Gabrys, Venketesh N. Dubey

Bournemouth University, Talbot Campus, Fern Barrow, Poole, Dorset, BH12 5BB, United Kingdom

ARTICLE INFO

Article history:

Received 15 February 2016

Received in revised form

21 August 2016

Accepted 2 September 2016

Published online 20 September 2016

Keywords:

Virtual reality

Adaptive systems

Intelligent algorithms

Training

ABSTRACT

This overview presents the current state-of-the-art of self-adaptive technologies within virtual reality (VR) training. Virtual reality training and assessment is increasingly used for five key areas: medical, industrial & commercial training, serious games, rehabilitation and remote training such as Massive Open Online Courses (MOOCs). Adaptation can be applied to five core technologies of VR including haptic devices, stereo graphics, adaptive content, assessment and autonomous agents. Automation of VR training can contribute to automation of actual procedures including remote and robotic assisted surgery which reduces injury and improves accuracy of the procedure. Automated haptic interaction can enable tele-presence and virtual artefact tactile interaction from either remote or simulated environments. Automation, machine learning and data driven features play an important role in providing trainee-specific individual adaptive training content. Data from trainee assessment can form an input to autonomous systems for customised training and automated difficulty levels to match individual requirements. Self-adaptive technology has been developed previously within individual technologies of VR training. One of the conclusions of this research is that while it does not exist, an enhanced portable framework is needed and it would be beneficial to combine automation of core technologies, producing a reusable automation framework for VR training.

© 2016 Elsevier Inc. All rights reserved.

Contents

1. Introduction	66
2. Principles of self-adaptive systems.....	67
2.1. Method for generating customised VR training content	68
3. Core technologies of virtual reality training.....	68
3.1. Adaptive technologies for training content.....	69
3.1.1. The history of developments within adaptive training.....	69
3.2. Head mounted displays (HMDs), stereo-graphics, eye and head tracking	70

* Corresponding author. Fax: +44 120 296 5314.

E-mail address: nvaughan@bmth.ac.uk (N. Vaughan).

<http://dx.doi.org/10.1016/j.cosrev.2016.09.001>

1574-0137/© 2016 Elsevier Inc. All rights reserved.

3.2.1.	Medical VR applications for head mounted displays (HMD)	70
3.2.2.	State-of-the-art HMD stereo devices	70
3.2.3.	Negative effects of head mounted displays (HMD)	71
3.3.	Haptic devices for VR-based training	71
3.3.1.	Adaptive systems for haptic devices	72
3.3.2.	Remote haptic interaction	72
3.3.3.	Robotic assisted surgery with haptic feedback	72
3.3.4.	Haptic devices for medical training	73
3.4.	Assessment and scoring feedback	73
3.4.1.	Problems for scoring and assessment within VR training	73
3.4.2.	Adaptive systems for scoring and feedback	74
3.4.3.	Construct validity	74
3.4.4.	Transfer validity	74
3.5.	Autonomous agents	74
3.5.1.	Autonomous agents simulating human behaviour within VR training	74
3.5.2.	Crowd-based multi-agent VR training	74
3.5.3.	Other VR training with autonomous agents	75
3.6.	Multimodal technologies combination	75
4.	Existing virtual reality training systems	76
4.1.	Medical VR-based training	76
4.1.1.	Features of medical VR training	76
4.1.2.	Benefits and effectiveness of medical VR training	76
4.1.3.	Costs of medical VR training	76
4.1.4.	Remote surgical, laparoscopic and endoscopic training	76
4.1.5.	EU funding for medical VR training	76
4.2.	Industrial and commercial VR	77
4.2.1.	Assessment within commercial and industrial VR training	77
4.2.2.	EU funding for industrial and commercial VR training	77
4.3.	Collaborative and remote VR training and MOOCs	77
4.3.1.	Collaborative and teamwork VR training	77
4.3.2.	Remote patient monitoring	78
4.3.3.	Adaptation within MOOCs (a-MOOCs)	78
4.3.4.	EU funding for collaborative VR	78
4.4.	Serious VR games for training	78
4.4.1.	Adaptation within VR serious games	79
4.4.2.	EU funding for serious games VR	79
4.5.	Rehabilitation VR	79
4.5.1.	Adaptation within rehabilitation VR games	79
4.5.2.	Wireless Kinect and Wiimote sensors for rehabilitation games	80
4.5.3.	Non-adaptable and manually adaptable rehabilitation games	80
4.5.4.	Rehabilitation VR training	80
4.5.5.	Disabilities VR training	80
4.5.6.	EU funded rehabilitation VR games	80
4.6.	Transfer of technology between VR topic areas	81
5.	Future technology in VR training	81
6.	Summary of technologies used within virtual training simulators	81
7.	Conclusions	83
	Acknowledgements	83
	References	83

1. Introduction

Previously no systematic study has been published on the use of self-adaptive systems for virtual reality training. As a result, it was unclear what self-adaptive methods have been applied within virtual training systems, and what these methods offer to the maintenance and capabilities of virtual training systems. This systematic overview aims to provide

this insight which is important for researchers, engineers, developers and scientists.

This research provides a current overview of the use of self-adaptive, autonomous systems and data driven training within Virtual Reality (VR) based training environments. Adaptation can benefit several core technologies within VR including haptic devices, stereo graphics, adaptive content, scoring and assessment and autonomous agents. Adaptation can provide customised or personalised content for

individually tailored learner-specific training for maximum learning efficiency.

The use of VR is continually increasing with mobile, online and ubiquitous technologies for 21st century learning. In 2014 Google released a VR interface for smartphones and Facebook acquired Oculus Rift,¹ a VR headset company for \$2 billion. Children are introduced to VR at a younger age as an effective part of K-12 primary, secondary and higher education [1]. Worldwide, VR is used for everyday training hand-eye coordination and physical skills. VR is useful for physical skills training. Training with VR has been applied to many training disciplines including flight simulation [2], military [3], engineering, space, automotive and manufacturing [4].

VR software applications are experiencing demand for increased mobility, including pervasive, ubiquitous, and embedded features, providing virtual training over the Internet and ad-hoc wireless networks. This leads to increasing demand to deal with handling complexity and achieving quality goals at run time.

A current problem is that VR trainees all experience the same training routines, which are not customised to individual learning patterns. Yet every trainee learns in a different way and will require their training to focus on specific aspects of the tasks.

Conventionally, in order to adapt or re-configure distributed training systems, human supervision is required which is costly and time consuming. Automation can avoid this human supervision to reduce or avoid these costs [5].

There is currently no method defined to enable adaptive VR training. Currently there is limited research on customisation of VR training to suit individual learners.

Self-adaptive VR could potentially make training more efficient and effective. VR training could be improved by incorporating autonomous, data-driven aspects to customise and automate training for individuals [6].

A literature search was performed to identify existing publications, research and patents which were reviewed as part of this research overview. Medical subject headings (MeSH) terms were used to search on the Medline (Pubmed) database. Additional keyword searches were conducted using alternative databases including IEEE Xplore, ASME Digital Collection, ACM Digital Library, Google Scholar and IET/IEEE Electronic Library (IEL) which produced further relevant titles. Patent searches using the European patent office (EPO) were conducted to identify existing intellectual property via the worldwide patent database. The results contained a larger number of academic research than commercial/industrial applications.

The main objective of this overview paper is to clarify the current use of self-adaptive systems and automation within virtual reality training and assessment. Adaptation within VR includes a variety of immersive, high fidelity technologies. Self-adaptation is particularly useful in VR for generation of learner-specific training scenarios to enhance learning. The paper will assess current applications for:

- Automating haptic feedback, for guiding novices based on expert knowledge.
- Automating VR training which can lead to automation of actual procedures such as robotic assisted surgery.

- Automating the generation of customised learning content in terms of visual, haptic and audio material to provide scenarios for learning which ideally challenge the individual in the best way to target improvement of their most beneficial skills.
- Automating the assessment and scoring mechanisms, which objectively generate feedback on a trainee's performance. This forms a vital part of generating user-centred content.

The rest of the paper covers: Section 2; outlining the principles of self-adaptive systems, which provides a precursor to adaptation of software since the main focus of this work is adaptation within VR training environments.

This review has been organised in such a way that Sections 3 and 4 present the main bulk of this research. Section 3 details the five main technologies used within VR, by detailing the uses for these five technologies within VR, which are (i) adaptive technology, (ii) haptic devices, (iii) head mounted displays (HMDs), (iv) assessment and (v) autonomous agents. Section 4 presents five main application areas of VR training; (i) medical, (ii) industrial and collaborative, (iii) collaborative and Massive Open Online Courses (MOOCs), (iv) serious games and (v) rehabilitation. These five areas were identified by an increased number of publications in these focus area. This overview reports the state of art within each of the five main VR application areas. The application area of Medical VR is particularly active and has the largest number of publications over recent years, perhaps due to the potential benefits offered by VR in avoiding patient harm.

Other sections include Section 5; covering the future VR technologies. Section 6 provides an overall comparison, which enables the reader to accessibly view which VR technologies have been used in which types of VR training. Section 7 draws conclusions from this overview summarising the current state and future directions of adaptive training in succinct form.

2. Principles of self-adaptive systems

The definition of an adaptive system is a set of interacting entities that together are able to respond to changes. Examples of natural adaptive systems include ecosystems, organisms or human communities.

Feedback loops represent a key feature allowing response to change. In adaptive systems this loop is known as a control loop. Control loops in adaptive systems can be formed from four categories of machine learning: prediction, recognition, detection and optimisation [7]. The outputs from the previous loops often initiate the inputs to subsequent loops, primarily causing change in response to the internal and external environment context.

Often when the user's behaviour and related parameters change, it is the task of functional adaptation to identify methods to adapt the environmental behaviour in response. Virtual agents aim to adapt and improve their functions over time, machine learning is often the technique used to study approaches to achieve this [7].

Software systems can be self-adaptive by applying closed-loop feedback with the aim to detect changes in operation and

¹ <https://www.oculus.com>.

respond at run time by self-adaptation. Often the adaptations result from internal (self) or external (context) events. In order for software to adapt, it must observe its own context, to identify relevant changes, make decisions regarding appropriate reactions, and implement these decisions by taking action [5].

Adaptive systems have been used within numerous subject topics and apply various theories and models. A survey of self-adaptive software was presented by Salehie and Tahvildari [5].

The primary need for self-adaptive software stems from the growing costs of implementing software applications with highly complex objectives [8].

The requirements of self-adaptive software include fulfilling the requirements during run-time even in presence of unforeseen changes. To accomplish this, adaptive systems need to demonstrate resilience to a degree of variability, whilst maintaining ability to overcome deviations from expected context, still reliably achieving goals.

Manual management and adaptation of software takes time and has high cost, so the advantage of an automated adaptation mechanism is that appropriate actions can be taken without excessive costs and not taking too much time. This requires the software to monitor the environment, observe changes and choose suitable actions [5].

An IEEE standard was derived to cover maintenance of self-adaptive software in response to environment changes (IEEE-ISO/IEC 14764 2006). Self-adaptive systems can also fix their own run-time bugs.

Formal approaches to self-adaptation within software provide approaches to thoroughly identify behaviours of adaptive software and their explanations both at design time and run time [9].

Generally self-adaptive systems comprise two sections: (1) dealing with domain functionality which is a managed system, and (2) adaptation which is a managing system, which modifies the managed system to achieve quality objectives [9].

Self-managing software is closely related to self-adaptive software, sharing autonomic functions [10] but there is no standard differentiation between these terminologies. Self-adaptive systems have less coverage than autonomic computing [5] and therefore can be regarded as a subset of autonomic computing.

Self-adaptive software can contain many subset capabilities including ability to be self-adaptive, self-managing, self-governing, self-maintaining, self-controlling, self-evaluating or self-organising.

Early adaptive systems in the mid 1990's used feedback loops with physiology [11]. Research on affective computing has also developed adaptive software taking into account the user's emotions [12].

This section has detailed the principles of adaptive systems. The next Section 2.1 will detail methods for generating customised VR training content.

2.1. Method for generating customised VR training content

Designs for autonomous VR training systems usually contain feedback loops to connect several elements. (i) Initially the

trainee is presented with a particular task which the trainee could attempt to complete. (ii) For assessment on completion, the system assesses or scores the trainee's performance on various factors or modules. Assessment may include accuracy, time taken, or skill in particular aspects. (iii) The autonomous training system selects the next task to be presented to the user based on past performance, targeting the individual's training requirements at that time.

If a trainee pilot within a virtual flight simulator performs badly in certain weather conditions, the autonomous training system may focus on that type of condition for future scenarios, enabling the trainee to improve the weakness [2]. However if a trainee performs better than expected the system may progress to more challenging scenarios. If a user repeatedly fails a task, the training may focus on strengthening the trainee's pre-requisite experience.

The desired behaviour of the autonomous system is to make informed decisions about the best next step for a particular user's training at a given time. There are several intelligent methods which could be used by the system to infer these decisions. For an autonomous system, data can provide a method of intelligent intervention to improve the efficiency of training. For this, data is required for each user's historical training results, providing a complete history of all scores for each task and module. As autonomous training will have been completed within a computer-based system, score histories should be readily available. An expert system approach or other computational intelligence techniques may then be applied to deduce informed decisions to select the most beneficial training modules for the given trainee at the current point in time.

Overall there are various aspects of automating VR training which include (i) Mechanisms for adaptive learning about a user's training requirements. (ii) Adaptive and reactive features to enhance trainee's learning efficiency. (iii) Autonomous training using simulation. (iv) Intelligent monitoring of a trainee's progress. (v) Various types of adaptive content can be included.

Section 2 has provided a precursor for this paper, clarifying uses and principles of adaptation within software. The main focus of this paper is adaptation within VR training environments. Contributing towards this, Section 3 will provide a summary of state of the art technologies used within VR training, describing the applications each technology has been used for.

3. Core technologies of virtual reality training

This section outlines five technologies which are the core building blocks of VR-based training simulations:

- (i) Adaptive technologies.
- (ii) Haptic devices.
- (iii) Head mounted displays.
- (iv) Assessment and scoring feedback.
- (v) Autonomous agents.

Throughout the remainder of Section 3, each of these five core technologies will be discussed in further detailed

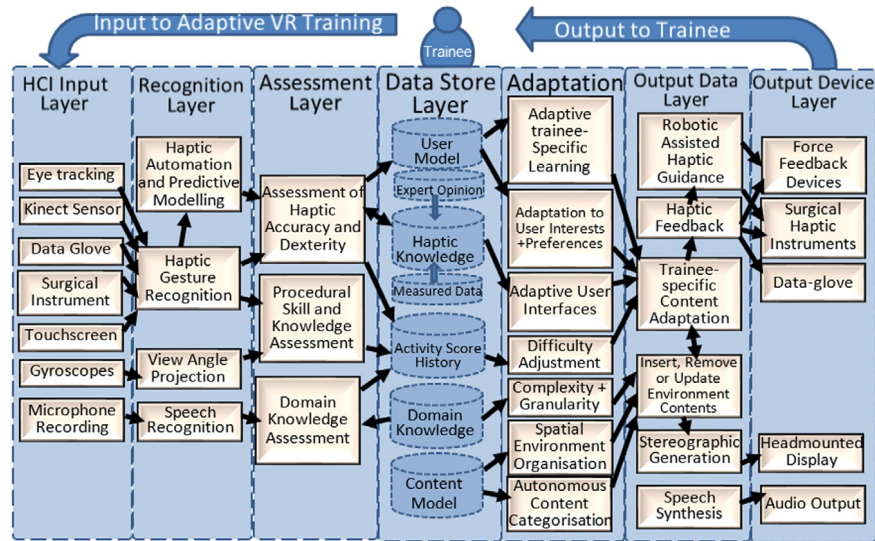


Fig. 1 – Interacting structure of multimodal technology components within VR-based adaptive training.

subsections. These five VR technologies are visualised in Fig. 1 showing the data flow and interaction with adaptation and various layers, building blocks for a unified hierarchical set of VR adaptive technologies. In the HCI layer, Kinect sensor may also represent other recent wireless gesture tracking devices such as Leap Motion. Non-core technologies are not covered by this article's scope. This overview outlines: (i) how each of these technologies are currently being used within VR training, (ii) how much adaptation has been applied to each technology, (iii) which topic areas of VR training each technology has been applied to, plus (iv) how these technologies have been combined together for multimodal VR. Each of the five core technologies influence adaptation of the VR training (Fig. 1).

3.1. Adaptive technologies for training content

Adaptation is one of the five core technologies in VR-based training, as shown in Fig. 1. Adaptation works with many data stores including the user model and score history, to provide a vital link connecting all technologies together. For example if the trainee interacts with an autonomous agent or haptic device, the stereo display output may adapt in response. The trainee's assessment score can take into account their eye tracking, motion capture and haptic device data, and adaptation will adjust the training difficulty to match skill level.

This section summarises the use of adaptive technology to generate user-centred VR-based training material. Fig. 2 highlights the time-line of technology improvement within adaptive technologies used within VR-based training systems. The timeline gives an insight into the recent developments and highlights key research publications applying adaptation. Each timeline in this review represents key developments in the 12 years between 2004 and 2016. This timeline summarises the technology trend evolution, considering commercial, academic and patents.

3.1.1. The history of developments within adaptive training

One of the earliest alternatives to rule-based learning was data driven learning (DDL) initiated by Johns [13,14]. Conventional rule-based learning was not proving capable of enabling a machine to respond intelligently to linguistic question generated by students. DDL for linguistics in this context led to a change in the role of the teacher who became more a director of the student initiated learning.

Later, system architectures for intelligent virtual training were presented [15]. These were defined by user needs for collaborative and distributed virtual environment e-learning. However the customisation was not based on a data driven intelligent approach. The learner's assessment scores were not used to target their weaknesses.

During 2004 e-learning systems were still in their infancy [16]. The learner was not yet individualised and was treated as a noncritical homogeneous user. To overcome these drawbacks, it was realised that more advanced systems would need to generate individual e-learning materials. During this infancy stage, it was acknowledged that a flexible multi-dimensional data model and the generation of individual content could provide the solution, necessary to enhance smart interaction between learners and content in e-learning systems.

Since then, adaptive user interfaces started to become a core part of VR-based training. Adaptive user interfaces require domain knowledge to be presented in a context-oriented, intelligent method. The granularity and complexity of domain knowledge adaptation should be a suitable match for the trainee's skills [17].

An adaptive and intelligent virtual environment was presented [18], which is presented and structured based on a model of trainee preferences. This is achieved by inserting, removing or updating the environment contents. Autonomous content categorisation is used to create models of the contents and used for spatial organisation of the environment, which began to show promising advantages from the use of adaptation [18].

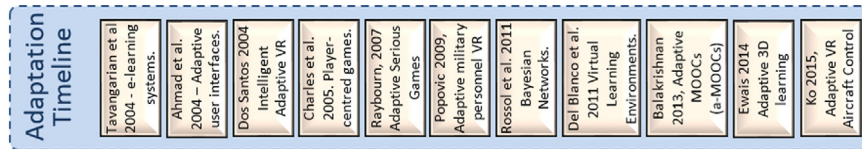


Fig. 2 – Time-line of developed adaptive technology within VR-based training.

Subsequently, trainee-specific learning was adopted in digital games for designs with player-centred adaptive modelling [19]. Game designs using player-centred adaptive modelling technologies were able to facilitate matching the difficulty level and learning curves to suit the individual player based on gender, age and skills which enhances the gameplay feeling for each player [19].

More recently, Bayesian network systems have proven effective for automated adaptive training in virtual rehabilitation [20]. Investigations may be necessary to assess whether this approach can apply to other virtual training.

Recent increased recognition of Virtual Learning Environments (VLE) for use within e-learning raises other complications including the fabrication of student-centred modules which autonomously adapt to individual student requirements [21]. Middle-ware has been developed for (i) adaptation and (ii) assessment within virtual learning by stealthily tracking activity of learners, to produce accurate user models or enhancing the assessment [21].

Recently more advanced adaptive 3D learning environment systems have been emerging which dynamically adapt to the learner [22]. The adaptation also responds to activities which the learner conducts during the training.

Following the progress of adaptation, conventions in learning have started to change. The syllabus is becoming less centralised. These changes have brought about questions: Can the adaptive learning methods be combined with traditional learning methods? How far can the learner progress with adaptive learning in a particular educational setting?

3.2. Head mounted displays (HMDs), stereo-graphics, eye and head tracking

With conventional flat monitor screens the lack of depth perception is a limitation to VR realism. A variety of technologies have recently been used to enable the generation of stereo images including holographic displays, head mounted displays, OLED screens and shutter glasses.

Head Mounted Display (HMD) systems often work in parallel with head motion tracking or eye tracking for enhanced realism. HMDs are often both an input and an output device. Inputs can include head motion tracking sensors, eye motion tracking, gyroscopes and accelerometers. The outputs are the two graphical displays, one for each eye. These inputs provide context-rich data which could be analysed by computational intelligence algorithms to spot behaviour patterns within the data. This information could be used for adaptation to produce adaptive content to personalise the experience for each user.

Stereo displays can be automated with calibration using neural networks or optimisation algorithms [23].

Fig. 3 highlights the time-line of technology improvement within head mounted displays or stereo graphics used within VR-based training systems.

3.2.1. Medical VR applications for head mounted displays (HMD)

As a medical technology tool, head-mounted displays, tracking and cueing systems have proven useful for over two decades. Early HMDs have been used to assist with rehabilitation [24]. Later HMDs were used for the assessment of patients suffering problems with sight loss and vision problems, such as hemi-neglect, a condition where patient's only notice stimuli from one-half of the visual field either right or left [25].

Clinicians have benefited from using HMDs for superimposing CT scan augmented bones or organs onto a patient's body [26]. More recently HMDs have been used to overlay partially transparent augmented reality x-ray or MRI directly onto the patient's body [27].

3.2.2. State-of-the-art HMD stereo devices

In 2015 Microsoft announced HoloLens,² an augmented reality headset. The device augments a holographic world projected in front of peripheral vision. HoloLens only takes up a small field of vision and uses voice and gesture commands. The headset supports HoloStudio which can aid 3D CAD design by projecting an augmented model which can be modified by hand gestures prior to 3D printing.

The Oculus Rift headset was designed for VR rather than augmented reality (AR) because it takes up the full field of view, unlike HoloLens which was designed for AR. Oculus Rift is compatible with computers, but a development kit could enable the device to be ported to Android, which would provide compatibility with many tablets and smart-phones which are becoming capable of running VR software.

Magic Leap has been funded \$542 Million by Google in 2014 [28]. It is developing an augmented reality headset combining fibre-optic projectors, lenses and cameras and is described by the CEO as "the most natural and human-friendly wearable computing interface in the world" [28]. Magic Leap has filed patents which reveal that the headset creates 3D patterns of light rays or light fields, allowing eyes to focus on depths of an artificial 3D scene just as they would in reality, providing a more realistic illusion of virtual objects merged with the real world.

Leap motion, founded in 2010 produce a small peripheral hardware sensor device that supports hand and finger motions as input requiring no hand contact or touching. It

² <http://www.microsoft.com/microsoft-hololens>.



Fig. 3 – Time-line of developed HMDs for VR-based training.

uses two monochromatic IR cameras and three infrared LEDs. Leap motion can be combined with Oculus Rift to produce an interactive virtual environment by mounting it onto the front of the HMD or placing it on a desktop.

Intel has released laptops and tablets in 2014 with a 3D sensor in place of the webcam. A second 3D sensor at the rear side can create 3D scans of people or items over twelve feet away to capture the colour and 3D profiles of the environment. This could enable a device to detect hand signals or locate items. The sensor could have uses for online clothes shopping whereby the sensor could use a 3D photo of a user to get an accurate measurement of clothing or shoe size. The sensor could allow tablets to measure the dimensions of furniture in a store, and display how it would fit into the customer's living room. Also the tablet's 3D sensor can be used to build augmented reality game software. Virtual objects of creatures displayed on the screen can integrate with the actual background.

Microsoft HoloLens is targeting a new era of human computer interaction (HCI) based on gaze, gesture, touch or voice recognition. Hands-free interfaces may become the successor to touchscreens, which were made ubiquitous by Apple. Nissan, Ford and Audi have introduced a gesture-controlled Kinect based system for dealerships enabling vehicle buyers to look inside a virtual new car [29].

GestSure is a start-up based in Seattle selling a product based on Kinect allowing surgeons to use gesture control to display medical images and scans. Referring to scans is crucial in the operating room but surgeons cannot touch any controls due to sterilisation.

Hackers have shown enthusiasm to take the Microsoft Kinect and repurpose it for different uses such as robot navigation or controlling a web browser [30].

Google Cardboard offers a virtual reality headset for smartphones which can be built at home from household objects and attached for VR experience.

3.2.3. Negative effects of head mounted displays (HMD)

Negative after-effects and reduced hand-eye coordination can temporarily occur after using a head mounted display (HMD). There is evidence that see-thru HMD can alter hand-eye coordination leading to increased discrepancy in comparison to baseline hand-eye accuracy. Decreased hand-eye accuracy of HMDs could cause negative effects for surgery trainees who rely upon high accuracy hand-eye coordination [31]. Users can partially adapt to most altered perceptual environments.

Motion sickness has historically been a problem with HMDs [32]. This may have been eliminated from the new Oculus Rift headset, which was acquired by Google for over \$2 Billion in 2013. Twenty years earlier in 1993 the Sega Genesis VR project released a headset combining VR graphics with

movement tracking software. This triggered motion sickness because the graphics followed the movement of the user's head with a noticeable time delay. Most modern headsets refresh at 125 Hz, but the newest model of Oculus Rift headset refreshes at 500 Hz with lower latency and no motion blur. Some users report motion sickness is eliminated, although a thorough trial may be required to confirm this. Also motion sickness can result from postural stability being reduced during a simulation [33].

Motion capture and tracking footage of actors produces more realistic humanoid CGI movement animations rather than pure animations alone. This helps to avoid the 'uncanny valley' problem which describes how poorly animated VR near-human CGI animations prompt discomfort in viewers. The 'uncanny valley' problem was discussed in a recent review [34]. As virtual reality worlds become more visceral, and as users report the feeling of deep immersion becoming more pronounced, the more likely users are to experience the unnerving sensations resulting from poorly animated motion of VR humanoids.

3.3. Haptic devices for VR-based training

Haptic feedback is used within VR to train tactile skills, making VR especially useful for learning physical skills where feeling and touch are important. A large variety of haptic force types can be fabricated including torque, vibration, resistances. Forces can be applied in multiple of degrees of freedom (DoF), commonly 3, 6 or more. The frequency of vibro-tactile feedback affects how haptic sensations feel to the user and can be adjusted within various bandwidths; the common frequencies range from 100 Hz to 500 Hz [2].

High precision scientific haptic instruments are becoming more widely available. General purpose devices are available from SensAble, now known as Geomagic,³ Novint,⁴ or Force Dimension.⁵ A comparison is shown in Table 1. Haptic devices have often been custom designed for particular training applications using motors with gears, electro-magnetic or electro-static forces for vibration [2] or by modifying existing haptic devices such as Novint Falcon [35]. Smartphones and tablet devices can now support a variety of tactile effects using libraries such as the Immersion Haptic SDK.⁶

Fig. 4 highlights the time-line of technology improvement within haptic devices used within VR-based training systems.

³ <http://www.geomagic.com/en/products-landing-pages/haptic>.


⁴ <http://www.novint.com>.

⁵ <http://www.forcedimension.com>.

⁶ <http://www.immersion.com/developers>.

Table 1 – Comparison of features of consumer haptic devices [35].

Company	Haptic device	Movement size (cm)	D.O.F	Maximum force (N)	Max. torque (mNm)	Force D.O.F	Cost
Geomagic	Premium3.0	41 × 58 × 84	6	22	515	6,3	£45 000
	Premium1.5	19 × 27 × 38	6	8.5	515	6,3	£20 000
	Premium1.0	13 × 18 × 25	6	8.5	0	3	£15 000
	Desktop	16 × 13 × 13	6	7.9	0	3	£9000
	Omni	16 × 12 × 7	6	3.3	0	3	£1700
Force dimension	Omega3,6,7	16 × 16 × 11	3,6,7	12	8	3	£12 000
	Sigma7	19 × 19 × 19	7	20	400	7	£52 000
	Delta3,6	36 × 36 × 30	3,6	20	200	3,6	£19 000
Novint	Falcon	10 × 10 × 10	3	9	0	3	£200

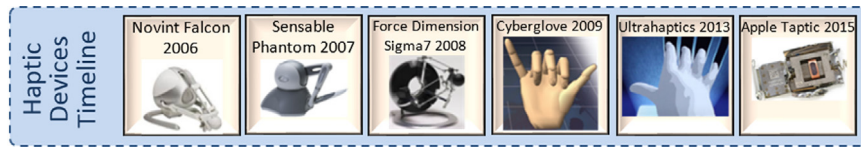**Fig. 4 – Time-line of developed haptic devices for VR-based training.**

Several libraries are available to control the most commonly available haptic devices. Such libraries are described in the review by Deng et al. [36]. The commonly available libraries are shown in Table 2.

3.3.1. Adaptive systems for haptic devices

Adaptive technology is useful within haptic feedback. When an expert uses a haptic device for performing a task within a virtual simulation, the movement of the haptic controller can be recorded during the expert's performance of the procedure and stored as expert knowledge. The expert knowledge can be replayed as haptic guidance so that novices can observe and feel how an expert performs a procedure.

Haptic devices including data-gloves can be automated by neural network predictive modelling to recognise gestures [37].

Haptic devices recently utilise automation and predictive modelling [38], to provide increased tactile realism such as resistance on airplane controls [2], or predictive control on a car steering wheel [38]. Haptic automation and predictive modelling could enable assistive technology which takes control of a vehicle to avoid accidents, or fully drive unmanned vehicles. Automated vehicles are expected to increase the demand for transport to more than triple by 2050 [39]. Automation in aircraft control is already common through autopilot systems monitoring data from dynamic aircraft sensors and controls, which often surpasses the performance achieved by pilots [40].

Haptic training systems aim to adapt a user's physical skills to match an ideal performance. This ideal performance benchmark is often formed from analysis of an expert performance. Learning hands-on skills from a haptic simulator enables the system to adapt a user's physical and tactile methods of the procedure. The adaptive elements of a user's physical skills can be measured in terms of the angle, force or rotation of the haptic instruments.

Omni-Directional Treadmills (ODTs) use adaptation within VR for walking or running [41] and intelligent fuzzy controllers [3].

3.3.2. Remote haptic interaction

For remote haptic interaction, data-gloves enable tele-presence enabling users to feel artefacts in remote environments, or virtual artefacts in simulated environments.

Haptic devices have been applied to control remote surgical procedures and collaborative virtual surgery training [42]. In remote haptic training, the instructor can provide a haptic guiding hand, to manually assist the trainee.

Automated predictive or assistive haptic intervention can be generated from expert knowledge. Predictive algorithms in surgical simulators can instruct haptic devices to intervene avoiding accidents. Automated assistive haptic interventions could be transferred from VR to real surgery avoiding injuries in actual procedures.

3.3.3. Robotic assisted surgery with haptic feedback

Robotic and computer-assisted surgery can assist both simulated and actual surgical procedures. Robotic-assisted surgery has good potential for improving accuracy and dexterity of surgeons and reducing patient injury. Integration of robotic control in human surgery has raised ethical considerations, yet benefits of robotic assistance have been proven. Surgical procedures integrating robotic assistance result in reduced problems, difficulties and deaths and increased unproblematic discharges [43]. However, clinical success is not yet widespread and success is marginal. The reason may be that the surgeon requires more force and tactile feedback. There are technical challenges for robot-assisted surgery haptic feedback [44].

Robot-assisted minimally invasive surgery (RMIS) can help to reduce the drawbacks of minimally-invasive surgery and to increase the surgeon's ability to perform surgical procedures.

Table 2 – Current libraries for haptic device application programming interfaces (APIs).

Library name	Supported haptic device(s)	Programming language(s)
Open haptics	SensAble	C++
CHAI 3D	Supports numerous manufacturers including VR systems.	C++
H3DAPI	Geomagic, Novint, X3D	C++, Python
Reachin API	Hardware independent	C++, VRML, Python
HaptX	Novint, SensAble	C++
HAPTIK	Supports numerous manufacturers	C++, Java, Matlab, Simulink
Virtual hand	Cyber glove systems, Virtual hand	C++

**Fig. 5 – Time-line of developed assessment and scoring within VR-based training.**

Assistive technology is a step towards a fully autonomous system, which can perform the action without the need for a human to be present. Full automation could in future become a possibility for various surgical haptic interaction tasks and adaptive technology may contribute to that as it has for vehicle and other automation.

Tele-surgery and surgical tele-operated master–slave robots aimed at minimally invasive surgery (MIS) have been enhanced by additional forces and other sensation feedback while controlling robotic devices remotely. For virtual training, force sensations form vital parts enabling safe operation. Recent tele-surgery systems are becoming multimodal by combining eye tracking and haptics, such as Telelap Alf-x [45]. Multimodality does help surgeons to locate target tissue [36] and experiments show a shorter average operation time compared to conventional tele-surgical systems [46].

3.3.4. Haptic devices for medical training

Haptic VR is now more accepted as an advanced method of learning minimally invasive surgery (MIS) [47]. Haptic feedback within VR is most valuable throughout the acquisition of psychomotor skills [47]. A review of haptic MIS simulators found that the majority demonstrate optimistic evaluation of force feedback and its benefits [47].

A trial demonstrated benefits of force feedback for virtual learning, showing that in a simulator with haptic feedback novice surgeons performed on average 36% faster and 97% more accurately than without. Performance is enhanced by haptic feedback reducing cognitive load which is beneficial in surgery [48].

With surgical training, the angles of haptic interactions are critical for success of the training procedure. An example highlighting the importance of angulation accuracy in surgical haptic training is epidural needle insertion simulators. During an epidural procedure a few degrees of angulation makes the difference between correct placement, or collision with bone or accidental puncture. In hip surgery simulators, the angular placement of the acetabular cup is ideally positioned with 15° anteversion and 40° abduction.

Inaccurate angulation increases the risk of hip dislocation which would require a second correctional surgery.

Haptic devices can use adaptive technology to assist the trainee to accomplish accurate angular or motion positioning by incorporating expert haptic guidance, which can adapt or reduce as the user's experience increases [49].

3.4. Assessment and scoring feedback

Quantitative and qualitative assessment and scoring feedback is essential for several purposes: (i) To enable trainees to understand their performance. (ii) To enable adaptive systems to automate user targeted training content.

Fig. 5 highlights the time-line of improvement for assessment and scoring within VR-based training.

3.4.1. Problems for scoring and assessment within VR training

There are inherent problems with conventional assessment for medical trainees in which decision aids have been used to provide scoring [50]. One problem with traditional assessment is that it does not account for diverse learning manners of individuals [51]. Inventory types based on Myers-Briggs can recognise learning methods and use that information to select the most efficient training activities [51]. The typology of Myers-Briggs can indicate trainees with varied backgrounds benefit from varied training styles, yet this approach has previously required manual intervention which is time consuming and laborious.

Real time error detection is a capability which generates feedback during the training. This is achieved by error detection methods which provide hints to the user as soon as errors are made. This could be a better method to intervene in real-time, as otherwise an error would not be known until the end of simulation. An example is [52] a training system for satellite controls.

3.4.2. Adaptive systems for scoring and feedback

Adaptive systems can be used to automate scoring and feedback, taking into account the trainee's performance within VR scenarios based on objective scoring criteria. Automated assessment provides an unsupervised and unbiased scoring mechanism and could be incorporated into curricula, replacing physical exams.

Adaptive systems can use assessment scores to adapt to an individual's learner-specific requirements by modifying the training packages presented to each user.

Adaptive VR training can control the extent to which feedback, hints and tips are displayed to the user in real-time. This can result in progressively decreasing the assistive technology as the trainees gain experience. In some cases, the initial training scenarios contain extra feedback, and the intervention gradually decreases when each learner moves forward through learning tasks and becomes more experienced. An example of this is the interactive virtual agent 'Steve' [53]. Virtual agents can assist with teaching physical training to students. Steve shakes his head as a signal when mistakes are made, providing instantaneous feedback to assist the trainee in real-time.

3.4.3. Construct validity

VR training has been shown to possess two useful features: (i) It can assess and score a user's skill level (construct validity) [54] and (ii) it may transfer to improvement in the real world (transfer validity) [55].

Construct validity is a determination based on how much an assessment measures the concept it aims to measure, within the intended scenario based on measurements [56]. There is very strong evidence for construct validity within VR simulators as they have proven to reliably assess the skill levels of trainees. This has been demonstrated for orthopaedic surgeons [54], in which simulators can clearly differentiate between novices and experts based on their simulator performance [57]. This provides strong confirmation suggesting virtual simulators reliably and accurately provide scoring or assessment of trainees. In this way, simulators deliver an unbiased objective scoring method for residents, which can highlight topics each individual could develop in their technique [54].

3.4.4. Transfer validity

Transfer validity refers to an ability of skills attained within VR simulation to transfer to improved skills in the real world.

Currently virtual surgery simulators provide some proof that they can teach skills which can transfer into improved skill on actual patients [58]. It has been demonstrated by a few studies that simulator learned skills can transfer into real life scenarios [59]. Overall there is a positive opinion and acceptance amongst surgeons that VR training does improve in-vivo skills, which is generally revealed by increasing use of VR training for a variety of surgical procedures. Transfer validity is not conclusively demonstrated by studies at present.

More studies should thoroughly assess simulator transfer validity of and test transfer of specific skills, e.g. simulator-acquired surgical skills to the operating room. Transfer validity is difficult to test. In order to conclusively ascertain

whether or not improved skill on actual patients can result from practice in virtual training, additional randomised controlled trials should be conducted to monitor trainee skills after and before virtual simulator training [55]. This should entail direct comparison between training on simulators and training with patients [59].

3.5. Autonomous agents

Autonomous agents within virtual training are computer rendered animated characters. They can act as embodied conversational agents (ECAs), intelligent virtual agents (IVAs) or embodied pedagogical agents (EPAs). Autonomous agents are increasingly used to enable interaction with the trainee within VR training. Agents interact with the trainee inside virtual environments to aid or adapt the user's interaction with learning content.

Fig. 6 highlights the time-line of improvement for autonomous agents within VR-based training.

3.5.1. Autonomous agents simulating human behaviour within VR training

Autonomous agents within virtual training can emulate human behaviour with recent libraries providing diverse sets of behaviour characteristics [60]. This improves upon previous autonomous agents which were limited to a single aspect of behaviour. The motion and emotion emulation of autonomous agents is increasingly human-like and realistic such that autonomous agents provide virtual training for fine dextrous motor functions such as dancing [61,62]. One approach for obtaining realistic, human-like motion is programming autonomous agents by direct demonstration using data recorded from actors or experts [63]. Autonomous agent behaviour for training can be programmed using sensor data, gross movement algorithms, path determination, collision avoidance and pedagogical temporal triggers [64]. Emotions of autonomous agents are becoming realistic to provide intuitive communication and psychologically believable agents. Autonomous agent emotion models use psychological theories or internal emotion models such as the Zurich model of social motivation [65]. Various algorithms have recently been defined to control autonomous agent behaviour [66]. Machine learning can enable autonomous agents to increase their performance as their experience grows [7].

Digital human modelling is increasing used within VR and is useful for autonomous agent modelling. The IOWA Interactive Digital-Human Virtual Environment [67] introduced the use of kinematic digital human modelling within VR.

3.5.2. Crowd-based multi-agent VR training

For crowd-based virtual training, autonomous agents driven by defined rules can control crowd behaviour, such as in a virtual reality training environment (VRTE) for subway disaster evacuation using a head-mounted display [68]. Autonomous agents were used for crowd simulation and human behaviour models during virtual aircraft evacuation training. Agents in groups or crowds can interact with each other, avoid



Fig. 6 – Time-line of developed autonomous agents within VR-based training.

obstacles and evolve to the environment [69]. A crowd of autonomous agents was used in a recent virtual training simulator for public speaking to familiarise trainees with speaking to audiences [70]. Agents in audience groups can display feedback depending on behavioural descriptors correlated with the trainee's performance analysed using audio-visual sensors with a distributed modular architecture [71].

Networked autonomous agents can contribute to robust, complex distributed training systems or MOOCs by interacting with humans or other agents. Self-adaptive collaboration patterns can provide autonomic features made up of ensembles of cooperating autonomous agents [72]. Collaborating agents can make decisions resembling networks of tasks with chronological and sequential limitations [73].

3.5.3. Other VR training with autonomous agents

Autonomous agents can provide a viable alternative to lecturers in online training courses [74]. Autonomous agents can collaborate and share knowledge to replace missing team members in collaborative virtual environment for training (CVET) [75].

Within adaptable VR training multi-agent systems such as Pegase, adaptable pedagogical agents can make informed decisions based on sets of represented knowledge to provide instructive assistance to trainees [76]. Autonomous agents can advantageously influence learning of educational content [77,78]. Agents support face-to-face interaction and have been extensively applied to Virtual Learning Environments (VLE) and computed Intelligent Tutoring Systems (ITS) and that utilise immersive head-mounted displays or virtual reality rooms [79]. Unlike human tutors, VR agents can be infinitely patient and consistent [80]. Intelligent agents can act as pedagogical assistants to interact with trainees within a distributed virtual training system in order to facilitate training [81].

As early as in 1999, an autonomous agent named Steve was developed to help trainees perform physical procedural tasks [53]. The student and the agent co-habit a 3D simulated environment. The autonomous agent demonstrates how to perform tasks, monitors trainees during training, and provides help input if required. The agent's architecture includes awareness, reasoning and motion planning. The awareness of the VR environment creates an accurate model, providing data for the reasoning and motion planning. Reasoning helps to decipher detected external cues, identifying optimum motion plans, builds task lists to reach objectives, and generates movement instructions. Motion planning utilises movement instructions, initiating the agent's speech, motion, eye direction plus other signals enabling the agent to interact with virtual items [53].

3.6. Multimodal technologies combination

The five core VR technologies highlighted in previous sections can often interact together in various ways as shown in Fig. 1. Multimodal technology is becoming increasingly important within VR. Multimodal technology aims to achieve a multisensory, immersive and highly visual VR environment, for example combining quadrophonic audio with stereo graphics and haptic feedback. Each of these technologies can involve adaptation.

An example is multimodal driving simulators which combine eye tracking with haptic controls and steering wheels. Eye-tracking during driving is used to analyse the driver's attention hotspots, detect driver fatigue to assist the driver's safety. Eye-tracking enables comparison of novice and expert drivers [82].

Multimodality is described as a new horizon for training. "Multimodal virtual reality enhances the effectiveness of learning from multimodal sensory integration" [83].

Another example of multimodal technology is visio-haptic interaction [35]. Eye tracking has been combined with haptics which has been outlined as a new horizon in learning based serious games.

A multimodal simulator training system for needle insertion [84] describes combination of haptic feedback with camera tracking system (MicronTracker⁷), plus augmented reality 3D model on a computer screen. However the system does not demonstrate any automation in terms of haptic feedback, customised training or individual adaptation.

Multimodal minimally invasive surgery (MIS) tele-operative systems have combined eye tracking with haptics [45]. Experiments show that multimodality helps surgeons to locate target tissue [36] and reduces average surgery time compared to conventional tele-surgery [46].

Multimodal interaction is used in smartphones. Eye tracking has been used to detect "gaze gestures as an input method, combined with vibro-tactile feedback as confirmation of the gaze event" [85].

A review outlined innovative applications combining haptics with eye tracking for serious games [36]. Combining several modalities can engage the human mind's ability to handle multiple inputs simultaneously. The trainees are then being exposed to other learning material instead of writing and images. Higher quality of data input media improves the accuracy to ensure learning.

Section 3 has provided an overview of 5 core technologies used with VR. These VR technologies have been applied to a variety of topic areas within existing VR-based training systems. These 5 main VR topic areas will be highlighted in Section 4.

⁷ <http://www.claronav.com/microntracker>.

4. Existing virtual reality training systems

This section presents a review of existing virtual reality training systems and their technological features. The simulators are arranged within a variety of topics, the main 5 VR-based training topics covered in this section are:

- (i) Medical VR.
- (ii) Industrial and Commercial VR.
- (iii) Collaborative VR and MOOCs.
- (iv) Serious Games.
- (v) Rehabilitation.

The five main VR topic areas shown above are covered in the following subsections, detailing their use of adaptation, current state-of the art, and outlining the ways in which these five VR topics make use of the five key VR technologies detailed in Section 3.

4.1. Medical VR-based training

Virtual reality has provided a paradigm shift for medical training [86]. Medical training simulators have been developed for many procedures. Simulation-based medical education (SBME) includes simulators with various levels of fidelity. High fidelity simulators contain technology based physiological qualities such as blood pressure or heart rate, which react to physical involvement, covered in a review over 34 years [87].

4.1.1. Features of medical VR training

Important features of medical VR training include (i) assessment and scoring; (ii) repeated task training; (iii) integrated syllabus; (iv) measuring effects; (v) simulator realism; (vi) learning and conserving skills; (vii) training experts; (viii) improvement of actual skill; (ix) group training; (x) learning environment [87].

Medical VR training often include haptic devices to train physical procedures, which range from very strong bone drilling in orthopaedics, down to sensitive soft tissue needle insertions [88]. Even touch sensitive skills such as palpation of tumors have been simulated with VR training [89].

3D virtual worlds (3DVW) have been used for medical training since 2000 and most frequently since 2006 [90]. As well as uses in academic and professional education, 3DVW are used for evaluation, plus actual treatment.

4.1.2. Benefits and effectiveness of medical VR training

A review based on 609 studies with 35,226 trainees found that the use of simulators enhanced by technology for healthcare training often results significant improvement of skill, knowledge, behaviours and can positively affect the patient outcome [91].

Assessment of skills within VR medical training can be a useful way to automate the trainee's performance feedback process and to inform which aspects of the VR need to adapt [92].

Crisis situations and medical emergencies management are especially suited to simulator training. With conventional training it is rare for emergency cases to arise [93]. Simulators allow unlimited practice in a safe, environment.

For nursing, a systematic review quantified the advantages of high fidelity simulators over other teaching methods in some contexts [94].

Team training in simulators can be beneficial for medical topics as long as the optimum team size is selected [94].

High fidelity medical educational simulators offer several advantages [93]. These include: (i) Providing a safe test scenario for the trainee. (ii) Protecting patients from injury caused by novices undertaking risky procedures (iii) Chance for group training of technical behavioural skills (iii) Ability to practise rare complications, and incidents which are valuable to learn (iv) Scenarios can be deliberately chosen rather than patients arriving randomly in-vivo (v) The ability to pause a training session for discussions, providing real-time evaluation (vi) A chance to retry failed tasks, or to use another method (vii) Opportunity to try different tools without risk to patients [93].

VR training as a supplement can improve physical skill of minimally invasive surgery trainees, decreasing the time taken for suturing plus improving precision [95]. Studies have demonstrated the efficiency, repeatability, and realism of training on simulators [93].

4.1.3. Costs of medical VR training

For medical training the cost effectiveness of VR simulators is another consideration. High fidelity simulators range from about five thousand dollars for laparoscopic simulators up to a quarter of a million dollars for technically advanced erudite simulators for anaesthesia [96]. The costs of conventional training for a surgical trainee with conventional training for 4 years is around fifty thousand dollars [97]. Also residents require additional time to complete procedures. Conventionally surgical trainees are apprentices who learn from expert surgeon supervision, which is takes a lot of time, is expensive and is not always equally effective [95].

4.1.4. Remote surgical, laparoscopic and endoscopic training

Within surgical simulation, a core aspect of research on automation focuses on transferring automation of simulated surgical procedures including remote haptic training in MOOCs into automation of actual procedures. Developments on automation within VR therefore feed directly into improving robotic-assisted surgery including the da Vinci surgical robot. The line is becoming blurred between simulated and remote haptic interaction environments. Therefore a trainee may not be able to tell whether their haptic data-glove is interacting with a remote artefact or a simulated artefact. Due to this similarity, the assistive robotic surgery designed to operate on simulators could be more easily transferred into real operating scenarios. Future applications to improve robotic-assisted surgery and remote surgery will require improved force and tactile feedback [44].

Laparoscopic surgery is now more widespread. Laparoscopy reduces incision size, but increases procedural difficulty, leading to increased training requirement. Recently VR laparoscopy simulators have been developed to aid training [98].

Endoscopic surgery has also been a good example of haptic VR training, enabling trainees to learn the unique hand-eye coordination and perform surgery such as detaching the gall bladder and performing electro-surgery [99].

4.1.5. EU funding for medical VR training

Medical VR training has been a focus of several recently funded European Commission projects: (EU Mindwalker

project⁸) funded €2.75M until 2013, proposes a mind controlled VR training environment for walking. The (EU VRSurgicalSimulation project⁹), a fellowship funded €87K until 2010 focused on simulators combining engineering with medical knowledge. The (EU Enorasi project¹⁰), funded €1.5M until 2004 focused on VR for training visually impaired.

4.2. Industrial and commercial VR

Significant recent research on industrial virtual training has focused on spatial manipulation for assembly tasks [100]. The primary focus of recent research within VR for assembly tasks focuses on developing robust and real-time collision detection, assembly path planning and physics modelling. Case studies outline several applications of virtual assembly in industry [101].

Adaptive VR Simulators have also been developed for training pilots on aircraft controls [2,40] and driving vehicles [38].

Adaptive VR interfaces have been implemented within e-commerce websites to make a customer's online shopping seem realistic, fun and attractive [102]. Adaptation is an important feature when applying a one to one commerce strategy. The ADVIRT system demonstrated an adaptive VR environment using customer models, adapting virtual shop features: (i) presenting varying merchandise on the shelves (ii) customised banners and audio advertising, (iii) directions for the shoppers, (iv) the arrangement and visual effects [102].

Adaptive VR training systems have been developed for military personnel [3,103]. Military adaptive VR systems optimise and customise the training experience to the physical ability of individual trainees [103]. The automated system configuration is beneficial as it relieves the therapist of repetitively monitoring and manipulating the system manually.

In-vehicle assistive technology (IVAT) is an example of predictive or assistive technology already being used in automobile technology, such as the audio feedback produced to indicate distance when parking. In some cases a vehicle's computer can ultimately stop the vehicle in order to avoid accidents.

Driving simulators which use prediction are widely popular on all major games consoles. A variety of haptic joysticks and seating pads are available. Haptic steering wheels such as INRETS-FAROS or 'The Haptic Wheel' are especially for driving. Recently eye-tracking has been combined with haptics for prediction and analysis. Eye-tracking whilst driving can be used to analyse the driver's attention hotspots, predict driver fatigue to assist the driver's safety and eye-tracking can autonomously draw comparison between novice and expert drivers [82].

4.2.1. Assessment within commercial and industrial VR training

There are many commercial and industrial applications for HMDs and AR [104] including adaptive military training

(Fig. 7) [3], automotive safety, public exhibition and entertainment, environmental planning and psychology.

The generic virtual training (GVT) system provides assessment and training for a range of industrial applications [105]. Validation of GVT on more than fifty operational scenarios shows that it helps learning to quickly pick up new industry processes.

A VR system was developed for training and assessment of conveyor belt safety for personnel working in the mining industry [106]. The VR safety training contains instructional-based and task-based VR modules. The assessment evaluates the user's understanding and ability to resolve situations during completion of a planned list of virtual tasks [106].

4.2.2. EU funding for industrial and commercial VR training

Industrial VR training has been a focus of several recently funded European Commission projects: (EU Vision project¹¹) funded €1.4M until 2011, proposes immersive interface technologies for aircraft related VR. The (EU VIRTUALIS project¹²) funded €9M until 2013, proposes to combine human knowledge with VR simulation to improve safety during production of chemicals. The (EU Vega project¹³) funded €900K until 2008, proposes the use of VR in product design and robotics, with VR simulation including manufacturing and recycling.

4.3. Collaborative and remote VR training and MOOCs

MOOCs can benefit from adaptation to generate customised learning material for each user. MOOCs are designed for unlimited participation via the web, for example when coordinated at universities. They allow subjects to be taught using conventional methods and other media, including video, as well as providing a community for discussions of topics. This also includes online discussions and scored tests for distributed groups.

MOOCs often make use of autonomous agents for virtual training. Several hundred MOOCs have been created, with an enrolment rate of around 40,000 students per course [107]. Some of the largest extended MOOCs (xMOOCs) are featured on platforms like Coursera or edX. Development costs for xMOOCs vary from \$38,000 to \$325,000 [108]. The largest costs relate to generating the video content [109].

Multimodal wired data-glove devices combined with VR remote environments can provide virtual presence, tele-presence, tele-existence or a virtual artefact (VA).

4.3.1. Collaborative and teamwork VR training

Collaborative e-learning or remote tele-learning is an emerging need of the information age. In future significant benefits are expected from distance learning, tele-learning, and online distributed and collaborative virtual training [81]. Virtual training environments should be knowledgeable, dispersed for group tele-learning. This uses intelligent agents

⁸ <http://www.mindwalker-project.eu>.

⁹ http://cordis.europa.eu/project/rcn/92531_en.html.

¹⁰ http://cordis.europa.eu/project/rcn/92531_en.html.

¹¹ http://cordis.europa.eu/project/rcn/88551_en.html.

¹² http://cordis.europa.eu/project/rcn/75752_en.html.

¹³ http://cordis.europa.eu/project/rcn/75559_en.html.

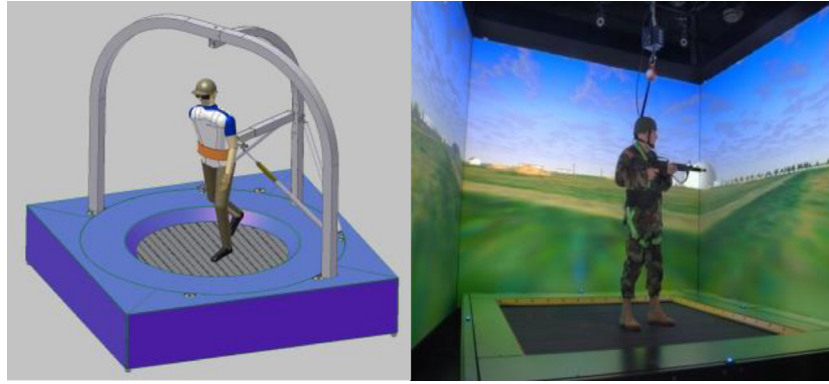


Fig. 7 – Adaptive military VR training, re-produced with permission [3].

as Pedagogical assistants to assist trainees and enable smooth completion of the training scenarios [81].

Collaborative virtual training is useful in medical procedures where a surgery requires two people, for example one person may hold the gall bladder whilst another cuts the connective tissues [42].

The ways in which team size effect simulation training needs to be determined by further exploration, according to a review of group training for nurses [94]. Also a universal method of outcome measurement should be developed. “The training content, team membership stability, and team size moderate the effectiveness of team training interventions” [110].

Teamwork training in simulation results in improved “knowledge, practical skills, communication, and team performance” [93] shown by a review covering 97 articles for obstetrics. Teams of medical staff need to practise collaboration and communications to improve efficiency and effectiveness. Therefore introduction of multidisciplinary team and group training on simulators aims to prevent adverse outcomes [93]. Team training is a viable approach which can enhance the outcome of the team and helps to improve effectiveness, teamwork, performance and cognitive outcomes [110]. Teams are ubiquitous, representing important groups to achieve goals [111].

4.3.2. Remote patient monitoring

Clinicians are now increasingly able to remotely monitor patient health, give consultations and advice and prescribe medicine. Teki is a tool which uses an Xbox games console for remote monitoring patients by collecting data from medical devices, enabling staff to monitor patients remotely [112].

4.3.3. Adaptation within MOOCs (a-MOOCs)

Adaptive MOOCs (a-MOOCs) are recently becoming more popular, using a combination of adaptive learning and MOOCs. Hidden Markov Models (HMMs) are useful in a-MOOCs to predict student retention [113]. HMMs which apply single discrete-valued observation variable are preferable, as opposed to multiple stream or continuous HMMs, due to their ease of training and well-established tool support. Ergodic, as opposed to linear HMMs enable independence of the features although several transformations of data are required.

Features of a-MOOCs can be customised to match particular subpopulations of trainees, identified using scalable, informative classification methods [114]. Learner sub-populations and their longitudinal engagement trajectories can be classified from their patterns of interaction with e-content. Classifier mechanisms and fine grained analytics form a framework for comparison of learner engagement, consistently identifying prototypical trajectories of engagement, across learner demographics, forum participation, e-content access, assessment and experience.

An adaptive MOOC for calculus, named (MOOCulus¹⁴) was developed in 2015 at Ohio State University by Professor Jim Fowler. The a-MOOC contains a fine-tuned adaptive learning engine which adapts each student's e-content to match their measured understanding level. The adaptation engine determines whether to serve extremely difficult or easy exercises, considering participation data, time taken and colour coded progress bar, providing data-driven feedback on classroom effectiveness.

4.3.4. EU funding for collaborative VR

Funding allocations for current and recent research gives a good indication of the activity within specific areas. There are recently funded projects within collaborative VR and MOOCs which indicate a good level of research activity. The European Commission project: (EU LEAP project¹⁵) funded €223K until 2016 focuses on virtual archaeology encouraging collaboration between trans-disciplinary departments, experts and audiences.

4.4. Serious VR games for training

Serious games can enable learning through playing and encourage the repeating of tasks to reinforce learning. Rewards are built-in, including goals, narratives, rules, multisensory cues and interactivity which aim to inspire users to keep playing. A review has summarised the ways in which video games can be designed for education [115].

Recent motion-sensing controllers for games including Nintendo Wii Balance Board,¹⁶ Sony Playstation Move,¹⁷ and

¹⁴ <https://mooculus.osu.edu/>.

¹⁵ http://cordis.europa.eu/project/rcn/187945_en.html.

¹⁶ https://en.wikipedia.org/wiki/Wii_Balance_Board.

¹⁷ <https://www.playstation.com/en-us/explore/accessories/playstation-move/>.

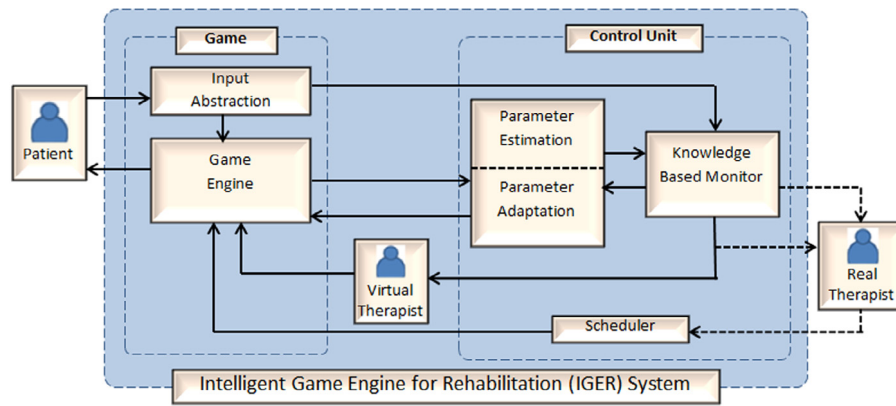


Fig. 8 – Intelligent adaptation with Bayesian networks and fuzzy systems based on Nintendo Kinect® motion sensing controllers for VR rehabilitation games (IGER) [117].

Microsoft Kinect¹⁸ have revolutionised the ability of video games for rehabilitation use [116]. These devices can capture movements or gestures from the user in the real world with a hands-free approach and convey them inside the game.

4.4.1. Adaptation within VR serious games

Successful modern video games must be adaptive to requirements, anticipations, and inclinations of the player. Yet from a software engineering perspective, current adaptation in games is ad hoc, “lacking rigour, structure, and reusability, with custom solutions for each game. There is a critical need for software frameworks, patterns, libraries, and tools to enable adaptive systems for games” [118].

Frequent adaptation within the setup of levels plus adaptation to user’s activities often enhance adaptive VR games. “Adapting to a player’s current skills make gaming experience more engaging” [116].

Adaptive serious game training engenders “communication opportunities for players to learn about their strengths and weaknesses, receive real-time in-game performance feedback, share diverse solutions and strategies during, between and after game play in order to update or adapt player understanding” [119].

Serious learning games have also incorporated aspects of customised player experience, by exploring various aspects of adaptive content. Customising the content can provide the player with a more suitable level of challenge. There is some overlap between games and medical training simulation, both can benefit from adaptive user-centred content, and elements of adaptive games could be re-used to apply to medical simulators providing adaptive user-centred content (Fig. 9).

Computational intelligence within games is of growing importance to various scientific disciplines. Research on this field “is very active and vibrant, but it is still at an early developmental stage” [120].

4.4.2. EU funding for serious games VR

The European Commission recently funded Serious Games especially since the recent increase in augmented reality: (EU AUGGMED project¹⁹) funded €5.5M until 2018 focuses

on automation within collaborative virtual and mixed reality serious games. The (EU Safe and sound drive project²⁰) funded €98K until 2016 is designing a serious game for cars to help increase driver skills and lower fuel consumption.

4.5. Rehabilitation VR

VR games are well suited for rehabilitation because: (i) they engage the users [117]. (ii) Games can contain intelligent systems to adapt to the user’s progress [116]. (iii) Rehabilitation games “can be used at the patient’s home” [116].

Analysis of SWOT (Strengths, Weaknesses, Opportunities, and Threats) identifies that VR has significant positive impact on rehabilitation [121].

Computational intelligence and adaptation can both provide significant benefits to the patient when applied within rehabilitation VR, and can supplement the therapist’s input with a virtual therapist as shown in Fig. 8.

4.5.1. Adaptation within rehabilitation VR games

Virtual reality rehabilitation systems are incorporating adaptation to meet the changing requirements of patients and therapists [122]. Adaptation to each patient’s functional status is a key requirement in rehabilitation games such as Intelligent Game Engine for Rehabilitation (IGER). “IGER is based on computational intelligence, monitoring is implemented in fuzzy systems, containing rules defined for the exercises by clinicians”, [117] as shown in Fig. 8. Adaptation of exercise difficulty level achieved using a Bayesian framework from observations of the trainee achievements.

Adapting to the patient capability and status is important within rehabilitation VR and especially serious games. Games for virtual rehabilitation can adapt to the player’s “pathology and rehabilitation aims” [123].

Adaptation and customisation has proven useful within VR training to enhance training for motor skills of prosthetic systems [124].

An adaptive rehabilitation game was developed for stroke patients using “physics-enriched virtual environments. Factors such as gravity can be scaled to adapt to individual patient’s abilities and in-game performance” [125].

¹⁸ <https://dev.windows.com/en-us/kinect>.

¹⁹ http://cordis.europa.eu/project/rcn/194875_en.html.

²⁰ http://cordis.europa.eu/project/rcn/195412_en.html.

The VividGroup's Gesture Xtreme projected VR neurological rehabilitation system adapts scenarios in terms of "type, speed, location and direction of all stimuli" [153]. Adaptable VR systems offer advantages as a rehabilitation tool.

4.5.2. Wireless Kinect and Wiimote sensors for rehabilitation games

During rehabilitation, "monitoring the patient's motion is mandatory to avoid maladaptation" [117]. VR games can assist this by using a variety or combination of wireless motion tracking devices to enhance patient motion analysis. Feedback on motion analysis, "performance and progression of the exercises can be provided" [117].

A wireless multisensory intelligent rehabilitation environment has been proposed based on gerontechnology in which technology is used to support the aspirations of the elderly. A Kinect sensor is used to detect the movement of the patient and Wiimote actuator is used to provide haptic feedback [126]. The Kinect sensor has recently been very useful for several rehabilitation systems by detecting the user's posture [127–133,126]. A study [134] tested Microsoft Kinect for replacing conventional rehabilitation therapy. Microsoft Kinect sensor measured reliability of gesture recognition in between 88.0%–92.2% and was rated as more fun and easier to use than the conventional rehabilitation system. Evaluation studies of Kinect for rehabilitation have been conducted [129] showing that improvements can be achieved by (i) improved, cleaner user interface, (ii) improved feedback given to the patient following a wrong movement and (iii) clearer instructions to the patient. This shows the importance of keeping the patient central when planning and designing VR-based rehabilitation environments.

The adaptive IGER Rehabilitation system can attach to several wireless tracking devices "through an input abstraction layer, including Nintendo® (Kyoto, Japan) Wii™ Balance Board™, the Microsoft® (Redmond, WA) Kinect, the Falcon from Novint Technologies (Albuquerque, NM), or the Tyromotion (Graz, Austria) Timo® plate balance board" [117].

4.5.3. Non-adaptable and manually adaptable rehabilitation games

Non-adaptable computer-assisted integrated game solutions for rehabilitation have been proposed [135–140]. These rehabilitation games can provide intuitive guidance through rehabilitation exercises. Most rehabilitation applications are limited as they rarely include any adaptation [116].

VirtualRehab (Virtualware Group) is a set of 9 rehabilitation games and exercises aimed at treating many disabilities. The physiotherapist can manually customise the treatment for each patient by choosing which games to assign. The game uses playful components to induce the user to feel more comfortable during treatment [141].

4.5.4. Rehabilitation VR training

For rehabilitation, VR is becoming an "integral part of cognitive ability assessment. VR has potential to assist rehabilitation techniques and training strategies addressing impairments, disabilities, dysfunction, memory impairments, spatial ability impairments, attention deficits, and unilateral

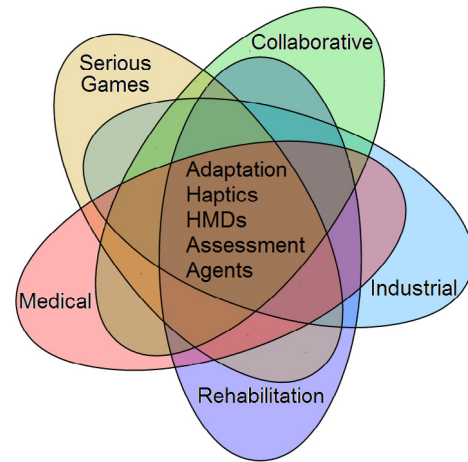


Fig. 9 – There are overlapping areas between topics of VR training and core technologies can apply to all.

visual neglect and to offset handicaps associated with brain damage" [142]. VR has been useful for rehabilitation after stroke [143].

A review of VR rehabilitation for intellectual disabilities shows that VR offers potential for "intervention and assessment. VR conveys concepts without use of language or by symbol systems" [80] making it ideal for mental disabilities. Benefits of VR fit into three groups: "promoting skills for independent living, enhancing cognitive performance, improving social skills; grocery shopping, preparing food, orientation, road safety, and work skills" [80].

4.5.5. Disabilities VR training

Manually adaptive virtual reality systems have been used to train severely disabled people to use electric wheelchairs [20]. Each patient is different, so generic training is not suitable. Adapting the training for each patient proves an effective supplement for rehabilitation [20]. Important challenges remain including: (1) high setup costs (2) continual manual adjustments to adapt the simulation to the patient improvement over time. Bayesian networks provide an effective solution for automating adaptive training [20].

For autism and people suffering autistic spectrum disorders (ASD) and Asperger syndrome (AS), VR "offers a new and exciting perspective on social skills training" [144] to practise role-play situations and repeat tasks.

4.5.6. EU funded rehabilitation VR games

Rehabilitation VR games have been the focus of several recently funded European Commission projects: [145]²¹ funded €3.5M until 2015 proposes an adaptive personalised VR health system. [146]²² funded €3.6M until 2015 is a personalised home rehabilitation system using intelligent objects and tools to re-train patients on activities of daily life, providing persistent multimodal feedback [147]²³ funded €3.3M until 2015 uses a tele-robotic glove with VR games

²¹ <http://www.rewire-project.eu>.

²² <http://www.cogwatch.eu>.

²³ <http://www.scriptproject.eu>.

to rehabilitate hands of stroke patients, and predict impact on health, and recovery costs. [148]²⁴ funded €3.3M until 2015 applies ICT home-based sensors, telemedicine and video games to assess fall risk in elder citizens.

4.6. Transfer of technology between VR topic areas

The topics of VR simulators overlap since there are technologies that can be re-used between several or all VR topics. The centre of Fig. 9 shows the core technologies covered in Section 3, some of which are hardware and some are software. The outside arms of the Venn diagram Fig. 9 show the topic areas of VR-based training which the core technologies can be applied to.

Due to the recent boom in the games industry there has been boosted technological advancement in input devices for games including HMDs, haptic devices, and wireless motion tracking such as Kinect. These developed technologies also have been useful in other VR topics. For example Kinect is used in various medical VR training. In this way, transfer of technology between the topics is useful to re-use content or techniques.

Traditional medical training is done with mentoring in which one mentor may have up to five students. However with MOOCs the size of classes can be several hundred thousand and this puts strain on the traditional feedback methods, and one to one feedback is no longer feasible. New approaches to assessment have been developed to meet these challenges in MOOCs and these may be useful in other topics such as medical, industrial or commercial VR training. One approach to automate the interaction and assistance of large tutor groups are autonomous agents. An agent named Steve was developed to “help students learn to perform physical procedural tasks” [53]. Intelligent agents were additionally developed as Pedagogical assistants [81].

In the topic of VR-based rehabilitation, the primary objective is assessment of the patient's motion. Therefore assessment has become well developed in rehabilitation and could be used for assessment in serious games or other VR medical training.

5. Future technology in VR training

The majority of VR research focuses on medical training, with other industries receiving less attention. There is currently increased research activity within rehabilitation games.

No common framework or method has yet been defined to customise learning content within VR training for individual trainees. Data mining of user scores and other measured performance data provide a possible solution. A database capturing results for all trainees could be data-mined by an algorithm to formulate a customised training plan for each trainee.

One of the future visions of physiology driven adaptive VR “is endowing the computers with automated emotion recognition capabilities, in order to facilitate a range of

applications in which the computers respond appropriately to the emotions of their users” [103].

Adaptive systems can already contribute towards predictive and assistive technology for controlling flights on autopilot. Assistive driving vehicle technology is becoming more widespread, including Google self-driving cars.²⁵ In addition to vehicles, automation could ultimately be the direction of other haptic tasks, such as surgery. The ultimate goal for fully autonomous systems is for the system to perform visio-haptic tasks without the requirement for a human operator to be present.

Several current technical challenges for haptic robot-assisted surgery are discussed in [44]. There are already situations where machine precision can outperform human judgement. Haptic simulations can provide a platform for development and testing of autonomous technologies, which can transfer into real-world haptic control. Real world adaptive haptic control systems could be applied to surgery or autonomous vehicles. These may contain assistive technologies to enhance the operator's precision or skill, or predictive systems, enabling the system to decide when to intervene to avoid predicted accidents.

Digital human modelling is increasing used within VR. The IOWA Interactive Digital-Human Virtual Environment [67] popularised the use of digital human modelling within VR by use of kinematic modelling of human. This is a special application with digital humans in virtual reality and can be used to enhance various applications in current and future research.

6. Summary of technologies used within virtual training simulators

This section presents a series of tables comparing the findings from this overview. Table 3 gives examples of VR simulators demonstrating which VR training topics have used which VR technologies. There are examples for all possible combinations, showing that generally all core VR technologies can be useful for all VR topic areas.

Table 4 shows examples of multimodal technologies within VR simulators, where two technologies have been combined together, including examples of existing VR simulators. The table shows that many technologies have been combined together with other technologies in the existing simulators. There are currently a lack of examples where autonomous agents have been combined with other technologies, but agents have been combined with adaptive content.

Table 5 shows examples of adaptation within each core VR technology. The table demonstrates that all of the core technologies make use of adaptation.

Table 6 shows examples of adaptation within the VR Topic areas. All five of the VR topic areas have made use of adaptation and examples are presented.

²⁴ <http://www.istoppfalls.eu>.

²⁵ <http://www.google.com/selfdrivingcar>.

Table 3 – The use of each core technology in each VR topic area (*Italic entries are adaptive*).

VR topics	Haptic devices	HMDs	Adaptive content	Assessment	Autonomous agents
Medical VR	Mist VR; VHB	Erat et al. [27], Fichtinger et al. [26], Ghanbarzadehet al. [90]	<i>Bayesian adaptive VR Wheelchair</i> [20]	Vaughan et al. [54]	Carbonell et al. [149], Larsson and Hayes-Roth [150]
Serious games	Nintendo [®] Wii [™] Balance Board [™] , Sony [®] Playstation [™] Move	Oculus Rift [104]	<i>Pirovano et al. [116], Raybourn [119], Lara-Cabrera et al. [120]</i>	Raybourn [119]	Buditjahanto [151]
Industrial and commercial VR	Ko et al. [2], Olivari et al. [40], Yamashita [38]	Furht [104]	ADVIRT (Chittaro et al. [102], Popovic et al. [103])	Lucas et al. [106], Gerbaud et al. [105]	Cabri et al. [72], Collins et al. [73], He et al. [152]
Collaborative VR & MOOCs	Gunn et al. [42], Okamura [44]	Tele-presence. Furht [104]	a-MOOCs (Kizilcec et al. [114]), MOOCulus	MOOCulus (Kizilcec et al. [114])	Bouras et al. [81]
Rehabilitation VR games	Oliver et al. [126], Chang et al. [127], Lange et al. [128]	Rushton et al. [24], Myers and Bierig [25]	<i>Pirovano et al. [116], Ijsselsteijn et al. [123], (Ma. 2007), Kizony and Katz [153]</i>	(EU iStoppFalls) [25], Rushton et al. [24]	Kallmann et al. [122]

Table 4 – Multimodal core VR technologies which have been combined together in VR.

Core VR technologies	Autonomous agents	Assessment and scoring	Adaptive content	HMDs
Haptic devices	Vaughan et al. [154]	Expert guidance	Ko et al. [2], Olivari et al. [40], Yamashita [38].	Visio-haptic simulators
HMDs	Sharma et al. [68]	Myers and Bierig [25], Rushton et al. [24].	Chen [23]	
Adaptive content	Rickel and Johnson [53], Stenudd [7].	Raybourn [119].		
Assessment and scoring	Rickel and Johnson [53]			

Table 5 – Adaptation within the core VR technologies.

Core VR technologies	Examples of adaptation and automation within VR technologies
Haptic devices	Aircraft controls [2,40]. Vehicle driving [38].
HMDs	HMD automated calibration using neural networks [23].
Assessment and scoring	Strengths, weaknesses, real-time in-game feedback [119].
Autonomous agents	Agents with machine learning to improve over time [7]. Agent Steve sets adaptive goals [53].

Table 6 – Adaptation within the VR topic areas.

VR topic area	Adaptation and automation within VR topics
Medical VR	Bayesian adaptive VR Wheelchair [20]
Serious games	Adaptation of game levels and player activity [116]
Industrial and commercial VR	Adaptive serious games [119]. Computational intelligence within games [120]. Adaptive e-commerce websites ADVIRT [102]. Adaptive training for military [3,103].
Collaborative & Remote VR & MOOCs	a-MOOCs. [114]. MOOCulus.
Rehabilitation VR games	Pirovano et al. [116], Ijsselsteijn et al. [123], Ma et al. [125], Kizony and Katz [153], IGER [131,122]

7. Conclusions

This current overview has summarised the state of the art virtual reality training systems using self-adaptive technology. Automation, machine learning and data driven features play an important role in providing trainee-specific individual adaptive training content. Data forms a critical input to enable adaptation within virtual training systems. Trainee assessment data can enable customised training scenarios and automated difficulty levels to match individual expertise. Data from audio-visual sensors can capture human behaviours for programming realistic autonomous agents. Expert knowledge and haptic measurements can be used to improve the accuracy of haptic feedback and guidance.

Adaptation has been applied to all five core technologies within VR training: adaptive technology, haptic devices, head-mounted displays, assessment, and autonomous agents.

With haptic devices, adaptive elements of a user's physical skills can be measured in terms of the angle, force or rotation of the haptic instruments. This is useful for adapting to the trainee's skill and expert haptic guidance.

Head-mounted displays (HMD) have used automated calibration using neural networks [23].

Assessment can be automated to provide an unsupervised and unbiased scoring mechanism enabling content and VR scenarios to adapt to suit the trainee's experience.

Autonomous agents can adapt to the way the trainee's interact with virtual content. Autonomous agents provide many benefits for virtual training courses, such as: being viable alternative to lecturers [74], collaborating and sharing knowledge between each other, replacing missing team members [75], acting as pedagogical assistants, interacting with trainees to facilitate training [81].

There are five core topics within VR training: medical, industrial & commercial, collaborative & MOOCs, serious games and rehabilitation.

In medical VR training adaptation is used in Bayesian network systems proving effective for automated adaptive virtual training [20].

For industrial & commercial VR training, adaptive technology has been used for military training [3,103], pilot training [2,40] and vehicle driver training [38].

Adaptive collaborative VR & MOOCs can predict trainee learning [113], identify trainee sub-populations and to adapt trainee content [114]. Adaptation is used to spot patterns of interaction with content.

Serious game levels can adapt to player activity. Games can be adaptive to "the needs, expectations, and preferences of the player. There is a need for software frameworks, patterns, libraries, and tools to enable adaptive systems for games" [118].

In rehabilitation VR training the exercise difficulties can adapt using a Bayesian framework to an individual patient's abilities and functional status which helps avoid maladaptation [131]. Input data can be collected from an abstraction layer using wireless tracking or audio-visual devices, to adapt with the patient's improvement over time.

There is not yet a common infrastructure making the automated technologies more combined and portable. Currently many implementations of adaptation within VR are

independently developed. A key step forwards would be to produce a portable framework for VR automation combining adaptation with each core technology within VR training. This would enhance the benefits of automation and make adaptation more accessible for a variety of VR training. A future priority is to develop a method of customising VR learning to follow recent changes in training infrastructure. The most important aspects of such a system would be: (i) Customised level of complexity, being not too easy or hard for the individual. (ii) Focus on areas of strength or weakness for each individual's most urgent learning requirements. (iii) Haptic feedback and guidance should enable a trainee to correct and fine tune their physical aspects including force, angles and rotation of the tools. (iv) Assessment and scoring is necessary to feedback to the user, but also to feed the AI algorithms for adaptive content.

Adaptation can help to enable a change away from textbook learning to the use of smart media and on-screen learning. This new change provides opportunity for customised adaptive learning to individualise e-content. As adaptation technology emerges there are considerations such as benchmark checks which should be performed to assess the capability of this new platform to out-perform the conventional approaches. The current new generation of trainees will demonstrate the benefits of the current smart training revolution.

There is increasing use of adaptation within VR training. Adaptation has benefits within several VR technologies. Adaptive VR training can achieve significant impact and improve training in the five key topic areas.

Acknowledgements

The authors would like to acknowledge Bournemouth University for funding this research. They would also like to acknowledge the help of various anonymous reviewers who provided feedback which helped strengthen the research. The authors acknowledge the editors of International Journal of Soft Computing and Software Engineering (JSCSE) for permission to re-produce Fig. 7.

REFERENCES

- [1] Z. Merchant, E.T. Goetz, L. Cifuentes, W. Keeney-Kennicutt, T.J. Davis, Effectiveness of virtual reality-based instruction on students' learning outcomes in K-12 and higher education: A meta-analysis, *Comput. Educ.* 70 (2014) 29–40.
- [2] H.U. Ko, H.C. Kim, A. Kafy, S.Y. Kim, J. Kim, Array haptic actuator for flight simulator, in: *SPIE Smart Structures and Materials+ Nondestructive Evaluation and Health Monitoring*, 94340Y, International Society for Optics and Photonics, 2015.
- [3] A.A. Khan, O. Naseer, D. Iliescu, E. Hines, Fuzzy controller design for assisted omni-directional treadmill therapy, *Int. J. Soft Comput. Softw. Eng. (JSCSE)* 3 (3) (2013) 30–37. <http://dx.doi.org/10.7321/jscse.v3.n3.8>.
- [4] J. Novak-Marcincin, M. Janak, J. Barna, L. Novakova-Marcincinova, Application of virtual and augmented reality technology in education of manufacturing engineers, in: *New Perspectives in Information Systems and Technologies*, Vol. 2, Springer International Publishing, 2014, pp. 439–446.

- [5] M. Salehie, L. Tahvildari, Self-adaptive software: Landscape and research challenges, *ACM Trans. Auton. Adapt. Syst. (TAAS)* 4 (2) (2009) 14.
- [6] A. Boulton, Testing the limits of data-driven learning: language proficiency and training, *ReCALL* 21 (1) (2009) 37–54.
- [7] S. Stenudd, Using machine learning in the adaptive control of a smart environment (Thesis), VTT Publications, 2010, p. 751.
- [8] R. Laddaga, Active software, in: *Proc. of Int. Workshop on Self-Adaptive Software*, 2000, pp. 11–26.
- [9] D. Weyns, M.U. Iftikhar, D.G. de la Iglesia, T. Ahmad, A survey of formal methods in self-adaptive systems, in: *Proceedings of the Fifth International C* Conference on Computer Science and Software Engineering*, ACM, 2012, pp. 67–79.
- [10] J.O. Kephart, D.M. Chess, The vision of autonomic computing, *Computer* 36 (1) (2003) 41–50.
- [11] E. Byrne, R. Parasuraman, Psychophysiology and adaptive automation, *Biol. Psychol.* 42 (3) (1996) 249–268.
- [12] R.W. Picard, Affective computing, *Tech. Rep. 321*, M.I.T Media Laboratory Perceptual Computing Section, 1995.
- [13] T. Johns, Micro-concord: A language learner's research tool, *System* 14 (2) (1986) 151–162.
- [14] T. Johns, Should You be Persuaded: Two Samples of Data-driven Learning Materials, 1991, pp. 1–13.
- [15] C. Bouras, V. Triantafyllou, T. Tsiatsos, A framework for intelligent virtual training environment: The steps from specification to design, *Educ. Technol. Soc.* 5 (4) (2002) 11–26.
- [16] D. Tavangarian, M.E. Leybold, K. Nölting, M. Röser, D. Voigt, Is e-learning the solution for individual learning, *Electron. J. E-Learn.* 2 (2) (2004) 273–280.
- [17] A. Ahmad, O. Basir, K. Hassanein, Adaptive user interfaces for intelligent e-Learning: issues and trends, in: *The Fourth International Conference on Electronic Business*, ICEB2004, Beijing, 2004.
- [18] C.T. dos Santos, F.S. Osório, An intelligent and adaptive virtual environment and its application in distance learning, in: *Proceedings of the Working Conference on Advanced Visual Interfaces*, ACM, 2004, pp. 362–365.
- [19] D. Charles, A. Kerr, M. McNeill, M. McAlister, M. Black, J. Kcklich, K. Stringer, Player-centred game design: Player modelling and adaptive digital games, in: *Proceedings of the Digital Games Research Conference*, Vol. 285, 2005, p. 100.
- [20] N. Rossol, I. Cheng, W.F. Bischof, A. Basu, A framework for adaptive training and games in virtual reality rehabilitation environments, in: *Proceedings of the 10th International Conference on Virtual Reality Continuum and Its Applications in Industry*, ACM, 2011, pp. 343–346.
- [21] A. Del Blanco, J. Torrente, P. Moreno-Ger, B. Fernández-Manjón, Enhancing adaptive learning and assessment in virtual learning environments with educational games, *IJDET-Intell. Learn. Syst. Advancements Comput.-Aided Instr.: Emerg. Stud.* (2011) 144–163.
- [22] A. Ewais, O. De Troyer, Authoring adaptive 3D virtual learning environments, *Int. J. Virtual Pers. Learn. Environ. (IJVPLE)* 5 (1) (2014) 1–19.
- [23] B.W. Chen, Stereo vision calibration based on Elman neural network, *Comput. Intell. Comput. Educ. Technol.* 19 (2014).
- [24] S.K. Rushton, K.L. Coles, J.P. Wann, Virtual reality technology in the assessment and rehabilitation of unilateral visual neglect, in: Sharkey, P. (Ed.), *Proceedings of the 1st International Conference on Disability, Virtual Reality & Associated Technologies*. Reading, UK, 1996, pp. 227–231.
- [25] R.L. Myers, T. Bierig, Virtual reality and left hemineglect: a technology for assessment and therapy, *CyberPsychol. Behav.* 3 (2000) 465–468.
- [26] G. Fichtinger, A. Deguet, K. Masamune, E. Balogh, G.S. Fischer, H. Mathieu, L.M. Fayad, Image overlay guidance for needle insertion in CT scanner, *IEEE Trans. Biomed. Eng.* 52 (8) (2005) 1415–1424.
- [27] O. Erat, O. Pauly, S. Weidert, P. Thaller, E. Euler, W. Mutschler, P. Fallavollita, How a surgeon becomes superman by visualization of intelligently fused multi-modalities, in: *SPIE Medical Imaging, International Society for Optics and Photonics*, 2013, 86710L–86710L.
- [28] Forbes. 2014. <http://www.forbes.com/sites/ellenhuet/2014/10/21/google-leads-monster-542-million-funding-for-magic-leap-a-mysterious-cinematic-reality-company/>.
- [29] MSDN, 2012. <http://blogs.msdn.com/b/kinectforwindows/archive/2012/08/22/nissan-pathfinder-virtual-showroom-is-latest-auto-industry-tool-powered-by-kinect-for-windows.aspx?Redirected=true> (Accessed October 2015).
- [30] IEEE. 2014. Microsoft Kinect Hack. <http://sites.ieee.org/vancouver-cs/archives/290> (Accessed October 2015).
- [31] J.P. Rolland, F.A. Biocca, T. Barlow, A. Kancherla, Quantification of adaptation to virtual-eye location in see-thru head-mounted displays, in: *Proceedings of the IEEE Virtual Reality Annual International Symposium'95*, IEEE Computer Society Press, Los Alamitos, CA, 1995, pp. 55–66.
- [32] P. DiZio, J.R. Lackner, Spatial orientation, adaptation, and motion sickness in real and virtual environments, *Presence: Teleoper. Vir. Environ.* 1 (1992) 323.
- [33] L. James Smart Jr., Edward W. Otten, Adam J. Strang, Eric M. Littman, Henry E. Cook, Influence of complexity and coupling of optic flow on visually induced motion sickness, *Ecol. Psychol.* 26 (4) (2014) 301–324.
- [34] A. Tinwell, M. Grimshaw, D. Abdel Nabi, The Uncanny Valley and nonverbal communication in virtual characters, in: J. Tanenbaum, M. Seif El-Nasr, M. Nixon (Eds.), *Nonverbal Communication in Virtual Worlds*, ETC Press, Pittsburgh, PA, 2014, pp. 325–342.
- [35] T.R. Coles, D. Meglan, N. John, The role of haptics in medical training simulators: a survey of the state of the art, *IEEE Trans. Haptic.* 4 (1) (2011) 51–66.
- [36] S. Deng, J.A. Kirkby, J. Chang, J.J. Zhang, Multimodality with eye tracking and haptics: A new horizon for serious games? *Int. J. Serious Games* 1 (4) (2014).
- [37] O. Luzanin, M. Plancak, Hand gesture recognition using low-budget data glove and cluster-trained probabilistic neural network, *Assem. Autom.* 34 (1) (2014) 94–105.
- [38] M. Yamashita, Assistive driving simulator with haptic manipulator using model predictive control and admittance control, *Procedia Comput. Sci.* 39 (2014) 107–114.
- [39] Gregory James Offer, Automated vehicles and electrification of transport, *Energy Environ. Sci.* 8 (1) (2015) 26–30.
- [40] F. Olivari, F.M. Nieuwenhuizen, H.H. Bühlhoff, L. Pollini, An experimental comparison of haptic and automated pilot support systems, in: *AIAA Modeling and Simulation Technologies Conference*, 2014, pp. 1–11.
- [41] Manish Chauhan, C.G. Rajeevlochana, Subir Kumar Saha, S.P. Singh, Control of an omnidirectional walking simulator, in: *Experimental Robotics*, Springer Berlin, Heidelberg, 2014, pp. 811–822.
- [42] C. Gunn, M. Hutchins, D. Stevenson, M. Adcock, P. Youngblood, Using collaborative haptics in remote surgical training, in: *World Haptics Conference*, IEEE Computer Society, 2005, pp. 481–482.
- [43] H. Yu, Uses, costs and comparative effectiveness of robotic assisted, laparoscopic and open urological surgery, *J. Urol.* 187 (4) (2011) 1392–1399.
- [44] A.M. Okamura, Haptic feedback in robot-assisted minimally invasive surgery, *Curr. Opin. Urol.* 19 (1) (2009) 102.
- [45] M. Stark, T. Benhidjeb, S. Gidaro, The future of telesurgery: a universal system with haptic sensation, *J. Turkish German Gynecol. Assoc.* 13 (1) (2012) 74.
- [46] F. Despinoy, J. Leon Torres, M.A. Vitrani, B. Herman, Toward remote teleoperation with eye and hand: A first experimental study, in: *3rd Joint Workshop on New Technologies for Computer/Robot Assisted Surgery*, CRAS2013, 2013.

- [47] O.A.J. Van der Meijden, M.P. Schijven, The value of haptic feedback in conventional and robot-assisted minimal invasive surgery and virtual reality training: a current review, *Surgical Endoscopy* 23 (6) (2009) 1180–1190.
- [48] C.G. Cao, M. Zhou, D.B. Jones, S.D. Schwaitzberg, Can surgeons think and operate with haptics at the same time? *J. Gastrointest. Surg.* 11 (11) (2007) 1564–1569.
- [49] B. Bayart, A. Pocheville, A. Kheddar, An adaptive haptic guidance software module for i-touch: example through a handwriting teaching simulation and a 3D maze, in: *IEEE International Workshop on Haptic Audio Visual Environments and their Applications*, 2005, 2005, p. 6.
- [50] J. Wyatt, D. Spiegelhalter, Field trials of medical decision-aids: potential problems and solutions, in: *Proceedings of the Annual Symposium on Computer Application in Medical Care*, American Medical Informatics Association, 1991, p. 3.
- [51] R.C. Worthington, M.C. Clay, Learner-specific continuing education and the myers-briggs type inventory, *J. Contin. Educ. Health Prof.* 15 (2) (1995) 95–100.
- [52] R.W. Chu, C.M. Mitchell, P.M. Jones, Using the operator function model and OFMspert as the basis for an intelligent tutoring system: Towards a tutor/aid paradigm for operators of supervisory control systems, *IEEE Trans. Syst. Man Cybern.* 25 (7) (1995) 1054–1075.
- [53] Jeff Rickel, W. Lewis Johnson, Animated agents for procedural training in virtual reality: Perception, cognition, and motor control, *Appl. Artif. Intell.* 13 (4–5) (1999) 343–382.
- [54] N. Vaughan, V.N. Dubey, T.W. Wainwright, R.G. Middleton, Can virtual-reality simulators assess experience and skill level of orthopaedic surgeons?, in: *Science and Information Conference*, 2015, p. 113.
- [55] N. Vaughan, V.N. Dubey, T.W. Wainwright, R.G. Middleton, Does virtual-reality training on orthopaedic simulators improve performance in the operating room?, in: *Science and Information Conference*, 2015, p. 112.
- [56] K.R. Wanzel, M. Ward, R.K. Reznick, Teaching the surgical craft: from selection to certification, *Curr. Probl. Surg.* 39 (6) (2002) 583–659.
- [57] K.W. Van Dongen, E. Tournioij, D.C. Van der Zee, M.P. Schijven, I.A.M.J. Broeders, Construct validity of the LapSim: can the LapSim virtual reality simulator distinguish between novices and experts? *Surgical endoscopy* 21 (8) (2007) 1413–1417.
- [58] Simerjit Madan, M.S. Singh, Dinker R. Pai, Role of simulation in arthroscopy training, *Simul. Healthc.: J. Soc. Simul. Healthc.* 9 (2) (2014) 127–135.
- [59] Susan R. Dawe, John A. Windsor, Joris A.J.L. Broeders, Patrick C. Cregan, Peter J. Hewett, Guy J. Maddern, A systematic review of surgical skills transfer after simulation-based training: laparoscopic cholecystectomy and endoscopy, *Ann. Surg.* 259 (2) (2014) 236–248.
- [60] R. Castano, G. Dotto, R. Suma, A. Martina, A. Bottino, VIRTUAL-ME: A library for smart autonomous agents in multiple virtual environments, in: *Agent Technology for Intelligent Mobile Services and Smart Societies*, Springer Berlin, Heidelberg, 2015, pp. 34–45.
- [61] D. Richards, J.C. Roxas, A. Bilgin, N. Hanna, A dancing virtual agent to evoke human emotions, in: *Proceedings of the 2015 International Conference on Autonomous Agents and Multiagent Systems*, International Foundation for Autonomous Agents and Multiagent Systems, 2015, pp. 1701–1702.
- [62] M. Uejo, H.H. Huang, Y. Seki, J.H. Lee, K. Kawagoe, Measuring user performance in the interaction with a virtual ballroom dance instructor, in: *Proc. of the 10th Asia Pacific Conference on Computer Human Interaction*, APCHI 2012, 2012.
- [63] R. Dörner, M. Kallmann, Y. Huang, Content creation and authoring challenges for virtual environments: From user interfaces to autonomous virtual characters, in: *Virtual Realities*, Springer International Publishing, 2015, pp. 187–212.
- [64] M. Gupta, J.W. Bertrand, S.V. Babu, P. Polgreen, A.M. Segre, An evolving multi-agent scenario generation framework for simulations in preventive medicine education, in: *Proceedings of the 2nd ACM SIGHIT International Health Informatics Symposium*, ACM, 2012, pp. 237–246.
- [65] F.D. Schönbrodt, J.B. Asendorpf, The challenge of constructing psychologically believable agents, *J. Media Psychol.* (2015).
- [66] B. Sniezynski, Agent-based adaptation system for service-oriented architectures using supervised learning, in: *ICCS* 2014, 2014, pp. 1057–1067.
- [67] J. Yang, K. Abdel-Malek, K. Farrel, K. Nebel, The IOWA interactive digital-human virtual environment, in: *ASME International Engineering Congress, The 3rd Symposium on Virtual Manufacturing and Application*, Nov. 13–19, 2004, Anaheim, California, USA.
- [68] S. Sharma, S. Jerripothula, S. Mackey, O. Soumare, Immersive virtual reality environment of a subway evacuation on a cloud for disaster preparedness and response training, in: *2014 IEEE Symposium on Computational Intelligence for Human-like Intelligence (CIHLI)*, IEEE, 2014, pp. 1–6.
- [69] R. Hocevar, F. Marson, V. Cassol, H. Braun, R. Bidarra, S.R. Musse, From their environment to their behavior: a procedural approach to model groups of virtual agents, in: *Intelligent Virtual Agents*, Springer Berlin, Heidelberg, 2012, pp. 370–376.
- [70] M. Chollet, G. Sratou, A. Shapiro, L.P. Morency, S. Scherer, An interactive virtual audience platform for public speaking training, in: *Proceedings of the 2014 International Conference on Autonomous Agents and Multi-Agent Systems*, 2014, pp. 1657–1658.
- [71] M. Chollet, T. Wörtwein, L.P. Morency, A. Shapiro, S. Scherer, Exploring feedback strategies to improve public speaking: an interactive virtual audience framework, in: *Proceedings of the 2015 ACM International Joint Conference on Pervasive and Ubiquitous Computing*, 2015, pp. 1143–1154.
- [72] G. Cabri, M. Puviani, F. Zambonelli, Towards a taxonomy of adaptive agent-based collaboration patterns for autonomic service ensembles, in: *2011 IEEE International Conference on Collaboration Technologies and Systems, CTS*, 2011, pp. 508–515.
- [73] J. Collins, M. Gini, Magnet: A multi-agent system using auctions with temporal and precedence constraints, in: *Multiagent Based Supply Chain Management*, Springer book, 2006, pp. 273–314.
- [74] J. Li, R. Kizilcec, J. Bailenson, W. Ju, Social robots and virtual agents as lecturers for video instruction, *Comput. Hum. Behav.* (2015).
- [75] T. Lopez, P. Chevaillier, V. Gouranton, P. Evrard, F. Nouviale, M. Barange, B. Arnaldi, Collaborative virtual training with physical and communicative autonomous agents, *Comput. Anim. Virtual Worlds* 25 (3–4) (2014) 485–493.
- [76] C. Buche, C. Bossard, R. Querrec, P. Chevaillier, PEGASE: A generic and adaptable intelligent system for virtual reality learning environments, *Int. J. Virtual Real.* 9 (2) (2010) 73–85.
- [77] R.C. Clark, R.E. Mayer, *E-learning and the Science of Instruction: Proven Guidelines for Consumers and Designers of Multimedia Learning*, John Wiley & Sons, 2011.
- [78] N.C. Krämer, G. Bente, Personalizing e-learning. The social effects of pedagogical agents, *Educ. Psychol. Rev.* 22 (1) (2010) 71–87.
- [79] C. Dede, Immersive interfaces for engagement and learning, *Science* 323 (5910) (2009) 66–69.

- [80] Penny J. Standen, David J. Brown, Virtual reality in the rehabilitation of people with intellectual disabilities: review, *CyberPsychol. Behav.* 8 (3) (2005) 272–282.
- [81] C. Bouras, A. Philopoulos, T. Tsiatsos, A networked intelligent distributed virtual training environment: a first approach, in: *Proceedings of Fifth Joint Conference on Information Sciences-JCIS*, 2000, pp. 604–607.
- [82] W.-B. Horng, C.-Y. Chen, Y. Chang, C.H. Fan, Driver fatigue detection based on eye tracking and dynamk, template matching, in: *Proceedings of the IEEE International Conference on Networking, Sensing and Control*, Taiwan, 2004, pp. 7–12.
- [83] S. De Freitas, *Learning in Immersive Worlds*, Joint Information Systems Committee, London, 2006.
- [84] C.J. Sutherland, An augmented reality haptic training simulator for spinal needle procedures, 2011.
- [85] J. Kangas, D. Akkil, J. Rantala, Gaze gestures and haptic feedback in mobile devices, in: *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems*, (CHI'14), ACM, New York, NY, USA, 2014, pp. 435–438.
- [86] Anthony G. Gallagher, E. Matt Ritter, Howard Champion, Gerald Higgins, Marvin P. Fried, Gerald Moses, C. Daniel Smith, Richard M. Satava, Virtual reality simulation for the operating room: proficiency-based training as a paradigm shift in surgical skills training, *Ann. Surg.* 241 (2) (2005) 364.
- [87] W.C. McGaghie, S.B. Issenberg, E.R. Petrusa, R.J. Scalese, A critical review of simulation-based medical education research: 2003–2009, *Med. Educ.* 44 (1) (2010) 50–63.
- [88] S. Kapoor, P. Arora, V. Kapoor, M. JayaChandran, M. Tiwari, Haptics-Touchfeedback technology widening the horizon of medicine, *J. Clin. Diagn. Res.: JCDDR* 8 (3) (2014) 294.
- [89] M.O. Alhalabi, V. Daniulaitis, H. Kawasaki, T. Hori, Medical training simulation for palpation of subsurface tumor using hiro, in: *Eurohaptics 2005*, 2005, pp. 623–624.
- [90] Ghanbarzadeh, R. Reza, A.H. Ghapanchi, M. Blumenstein, A. Talaie-Khoei, A decade of research on the use of three-dimensional virtual worlds in health care: a systematic literature review, *J. Med. Internet Res.* 16 (2) (2014).
- [91] David A. Cook, Rose Hatala, Ryan Brydges, Benjamin Zendejas, Jason H. Szostek, Amy T. Wang, Patricia J. Erwin, Stanley J. Hamstra, Technology-enhanced simulation for health professions education: a systematic review and meta-analysis, *Jama* 306 (9) (2011) 978–988.
- [92] G. Ahlberg, L. Enochsson, A.G. Gallagher, L. Hedman, C. Hogman, D.A. McClusky, D. Arvidsson, Proficiency-based virtual reality training significantly reduces the error rate for residents during their first 10 laparoscopic cholecystectomies, *Am. J. Surg.* 193 (6) (2007) 797–804; S. Baek, S. Lee, G.J. Kim, Motion retargeting and evaluation for VR-based training of free motions, *Vis. Comput.* 19 (2003) 222–242.
- [93] A.E.R. Meriën, J. Van de Ven, B.W. Mol, S. Houterman, S.G. Oei, Multidisciplinary team training in a simulation setting for acute obstetric emergencies: a systematic review, *Obstet. Gynecol.* 115 (5) (2010) 1021–1031.
- [94] Robyn P. Cant, Simon J. Cooper, Simulation-based learning in nurse education: systematic review, *J. Adv. Nurs.* 66 (1) (2010) 3–15.
- [95] Myura Nagendran, Kurinchi Selvan Gurusamy, Rajesh Aggarwal, Marilena Loizidou, Brian R. Davidson, Virtual reality training for surgical trainees in laparoscopic surgery, *The Cochrane Library*, 2013.
- [96] S.B. Issenberg, W.C. McGaghie, I.R. Hart, Simulation technology for health care professional skills training and assessment, *JAMA* 282 (1999) 861–866.
- [97] M. Bridges, D.L. Diamond, The financial impact of teaching surgical residents in the operating room, *Am. J. Surg.* 177 (1999) 28–32.
- [98] A.G. Gallagher, R.M. Satava, Virtual reality as a metric for the assessment of laparoscopic psychomotor skills, *Surg. Endoscopy Other Intervent. Tech.* 16 (12) (2002) 1746–1752.
- [99] W. Ahn, S. Dargar, T. Halic, J. Lee, B. Li, J. Pan, S. De, Development of a Virtual Reality Simulator for Natural Orifice Translumenal Endoscopic Surgery (NOTES) Cholecystectomy Procedure. *Medicine Meets Virtual Reality 21: NextMed/MMVR21*, Vol. 196, 2014, p. 1.
- [100] J.E. Brough, M. Schwartz, S.K. Gupta, D.K. Anand, R. Kavetsky, R. Pettersen, Towards the development of a virtual environment-based training system for mechanical assembly operations, *Virtual Real.* 11 (4) (2007) 189–206.
- [101] S. Jayaram, U. Jayaram, Y.J. Kim, C. DeChenne, K.W. Lyons, C. Palmer, T. Mitsui, Industry case studies in the use of immersive virtual assembly, *Virtual Real.* 11 (4) (2007) 217–228.
- [102] L. Chittaro, R. Ration, Adding adaptive features to virtual reality interfaces for e-commerce, in: *Adaptive Hypermedia and Adaptive Web-Based Systems*, Springer Berlin, Heidelberg, 2000, pp. 86–97.
- [103] S. Popovic, M. Horvat, D. Kukulja, B. Dropuljic, K. Cosic, Stress inoculation training supported by physiology-driven adaptive virtual reality stimulation, *Stud. Health Technol. Inform.* 144 (2009) 50–54.
- [104] B. Furht, *Handbook of Augmented Reality*, Springer Book, New York, 2011.
- [105] S. Gerbaud, I. De Rennes, N. Mollet, F. Ganier, B. Arnaldi, I. De Rennes, J. Tisseau, GVT: a platform to create virtual environments for procedural training, in: *IEEE Virtual Reality Conference*, 2008.
- [106] J. Lucas, W. Thabet, P. Worlikar, Using virtual reality (VR) to improve conveyor belt safety in surface mining, in: *24th W78 Conference Maribor 2007 & 5th ITCEDU Workshop & 14th EG-ICE Workshop: Bringing ITC*, 2007.
- [107] K. Jordan, Initial trends in enrolment and completion of massive open online courses, *Int. Rev. Res. Open Distance Learn.* 15 (1) (2014).
- [108] F.M. Hollands, D. Tirthali, MOOCs: Expectations and reality. Full Report, Center for Benefit-Cost Studies of Education, Teachers College, Columbia University, NY, 2014.
- [109] T. Lewin, Students rush to web classes, but profits may be much later, *New York Times* 6 (2) (2013).
- [110] E. Salas, D. DiazGranados, C. Klein, C.S. Burke, K.C. Stagl, G.F. Goodwin, S.M. Halpin, Does team training improve team performance? A meta-analysis, *Hum. Factors: J. Hum. Factors Ergonomics Soc.* 50 (6) (2008) 903–933.
- [111] M.A. Marks, The science of team effectiveness, *Psychol. Sci. Public Interest* 7 (3) (2010) i.
- [112] Teki, 2013. <http://www.osakidetza.euskadi.net> (Accessed October 2015).
- [113] G. Balakrishnan, Predicting Student Retention in Massive Open Online Courses using Hidden Markov Models. Technical Report No. UCB/EECS-2013-109, University of California at Berkeley, Electrical Engineering and Computer Sciences, 2013, <http://www.eecs.berkeley.edu/Pubs/TechRpts/2013/EECS-2013-109.html> (Accessed October 2015).
- [114] R. Kizilcec, C. Piech, E. Schneider, Deconstructing disengagement: Analyzing learner subpopulations in massive open online courses, in: *Proc. 3rd Int'l Conference on Learning Analytics and Knowledge, LAK'13*, Belgium, 2013.
- [115] M.J. Dondlinger, Educational video game design: A review of the literature, *J. Appl. Educ. Technol.* 4 (1) (2007) 21–31.
- [116] Michele Pirovano, Renato Mainetti, Gabriel Baud-Bovy, Pier Luca Lanzi, N. Alberto Borghese, Self-adaptive games for rehabilitation at home, in: *2012 IEEE Conference on Computational Intelligence and Games, (CIG)*, IEEE, 2012, pp. 179–186.
- [117] Borghese, Nunzio Alberto, Michele Pirovano, Pier Luca Lanzi, Seline Wüest, Eling D. de Bruin, Computational intelligence and game design for effective at-home stroke rehabilitation, *Games Health: Res. Dev. Clin. Appl.* 2 (2) (2013) 81–88.

- [118] M.I. Chowdhury, M. Katchabaw, A software design pattern based approach to adaptive video games, in: ADAPTIVE 2013, The Fifth International Conference on Adaptive and Self-Adaptive Systems and Applications, 2013, pp. 40–47.
- [119] E.M. Raybourn, Applying simulation experience design methods to creating serious game-based adaptive training systems, *Interact. Comput.* 19 (2) (2007) 206–214.
- [120] R. Lara-Cabrera, C. Cotta, A.J. Fernández-Leiva, An analysis of the structure and evolution of the scientific collaboration network of computer intelligence in games, *Physica A* 395 (2014) 523–536.
- [121] A. Rizzo, G.J. Kim, A SWOT analysis of the field of virtual reality rehabilitation and therapy, *Presence* 14 (2005) 119–146.
- [122] M. Kallmann, C. Camporesi, J. Han, VR-assisted Physical Rehabilitation: Adapting to the Needs of Therapists and Patients. Vol. 8844, Springer Verlag, 2015, pp. 147–168. p. 8844.
- [123] W. Ijsselstein, H.H. Nap, Y. de Kort, K. Poels, Digital game design for elderly users, in: Proc. 2007 conf. on Future Play, ser. Future Play '07, 2007, pp. 17–22.
- [124] R. Davoodi, G.E. Loeb, Real-time animation software for customized training to use motor prosthetic systems, *IEEE Trans. Neural Syst. Rehabil. Eng.* 20 (2) (2012) 134–142.
- [125] M. Ma, M. McNeill, D. Charles, S. McDonough, J. Crosbie, L. Oliver, C. McGoldrick, Adaptive virtual reality games for rehabilitation of motor disorders, *Lecture Notes in Comput. Sci.* 4555 (2007) 681–690.
- [126] Miguel Oliver, José Pascual Molina, Francisco Montero, Pascual González, Antonio Fernández-Caballero, Wireless multisensory interaction in an intelligent rehabilitation environment, in: Ambient Intelligence-Software and Applications, Springer International Publishing, 2014, pp. 193–200.
- [127] Y. Chang, S. Chen, J. Huang, A Kinect-based system for physical rehabilitation: A pilot study for young adults with motor disabilities, *Res. Dev. Disabil.* 32 (2011) 2566–2570.
- [128] B. Lange, C. Chang, E. Suma, B. Newman, A. Rizzo, M. Bolas, Development and evaluation of low cost game-based balance rehabilitation tool using the Microsoft Kinect sensor, in: Proceedings of the 33rd Annual International Conference of the IEEE Engineering in Medicine and Biology Society, 2011, pp. 1831–1834.
- [129] D. Freitas, A. Da Gama, L. Figueiredo, T. Chaves, D. Marques-Oliveira, V. Teichrieb, C. Araújo, Development and evaluation of a Kinect based motor rehabilitation game, in: Proceedings of Simposio Brasileiro de Jogos e Entretenimento Digital, 2012, pp. 144–153.
- [130] C. Chang, B. Lange, M. Zhang, S. Koenig, P. Requejo, N. Somboon, A. Sawchuk, A. Rizzo, Towards pervasive physical rehabilitation using Microsoft Kinect, in: Proceedings of the 6th International Conference on Pervasive Computing Technologies for Healthcare, 2012, pp. 1–4.
- [131] Michele Pirovano, Pier Luca Lanzi, Renato Mainetti, Nunzio Alberto Borghese, IGER: A game engine specifically tailored to rehabilitation, in: Games for Health, Springer Fachmedien Wiesbaden, 2013, pp. 85–98.
- [132] J.A. Fuentes, M. Oliver, F. Montero, A. Fernández-Caballero, M.A. Fernández, Towards usability evaluation of multimodal assistive technologies using RGB-D sensors, in: J.M. Ferrández Vicente, J.R. Álvarez Sánchez, F. Paz López, F.J. Toledo Moreo (Eds.), Natural and Artificial Computation in Engineering and Medical Applications, Springer, Heidelberg, 2013, pp. 210–219.
- [133] Toyra, 2013. <http://www.toyra.org> (Accessed October 2015).
- [134] E. Davaasambuu, C. Chiang, J. Chiang, Y. Chen, S. Bilgee, A Microsoft Kinect based virtual rehabilitation system, in: Proceedings of the 5th International Conference on Frontiers of Information Technology, Applications and Tools, 2012, pp. 44–50.
- [135] R. Mainetti, A. Sedda, M. Ronchetti, G. Bottini, N.A. Borghese, Duckneglect: video-games based neglect rehabilitation, *Technol. Health Care* (2013).
- [136] N.A. Borghese, M. Renato, P. Michele, P.L. Lanzi, An integrated low-cost system for at home rehabilitation, in: VSSMM2012 conference, 2012.
- [137] D. Jack, R. Boian, A.S. Merians, Virtual reality-enhanced stroke rehabilitation, *IEEE Trans. Neural. Syst. Rehabil. Eng.* 9 (2011) 308.
- [138] M. Cameirao, S. Badia, E. Oller, P. Verschure, Neurorehabilitation using the virtual reality based rehabilitation gaming system: Methodology, design, psychometrics, usability and validation, *J. Neuroeng. Rehabil.* 7 (1) (2010) 48.
- [139] J.W. Burke, M. McNeill, D. Charles, P. Morrow, J. Crosbie, S. McDonough, Serious games for upper limb rehabilitation following stroke, in: Conf. in Games and Virtual Worlds for Serious Applications, 2009, pp. 103–110.
- [140] J. Burke, M. McNeill, D. Charles, Optimising engagement for stroke rehabilitation using serious games, *Vis. Comput.* 25 (2009) 1085.
- [141] VirtualRehab, 2013. <http://virtualrehab.info>.
- [142] F. David Rose, Barbara M. Brooks, Albert A. Rizzo, Virtual reality in brain damage rehabilitation: review, *CyberPsychol. Behav.* 8 (3) (2005) 241–262.
- [143] P. Langhorne, F. Coupar, A. Pollock, Motor recovery after stroke: a systematic review, *Lancet Neurol.* 8 (8) (2009) 741–754.
- [144] S. Parsons, P. Mitchell, The potential of virtual reality in social skills training for people with autistic spectrum disorders, *J. Intellectual Disabil. Res.* 46 (5) (2002) 430–443.
- [145] EU Rewire Project. www.rewire-project.eu (Accessed October 2015).
- [146] EU Cogwatch Project. www.cogwatch.eu (Accessed October 2015).
- [147] EU Script Project. www.scriptproject.eu (Accessed October 2015).
- [148] EU iStoppFalls Project. www.istoppfalls.eu (Accessed October 2015).
- [149] J. Carbonell, J. Siekmann, J. Lee, Mobile agents using data mining for diagnosis support in ubiquitous healthcare, *Agent Multi-Agent Syst.: Technol. Appl.* 2007 (2007) 795.
- [150] J.E. Larsson, B. Hayes-Roth, An intelligent autonomous agent for medical monitoring and diagnosis, *IEEE Intell. Syst. Appl.* 13 (1) (1998) 58–64.
- [151] I. Buditjahjanto, Fuzzy clustering based on multi-objective optimization problem for design an intelligent agent in serious game, *J. Theor. Appl. Inf. Technol.* 28 (1) (2011) 54.
- [152] M. He, N.R. Jennings, H. Leung, On agent-mediated electronic commerce, *IEEE Trans. Knowl. Data Eng.* 15 (2003) 985–1003.
- [153] R. Kizony, N. Katz, Adapting an immersive virtual reality system for rehabilitation, *J. Vis. Comput. Animat.* 14 (5) (2003) 261–268.
- [154] N. Vaughan, V.N. Dubey, M.Y. Wee, R. Isaacs, Parametric model of human body shape and ligaments for patient-specific epidural simulation, *Artif. Intell. Med. (AIIM)* (2014).