
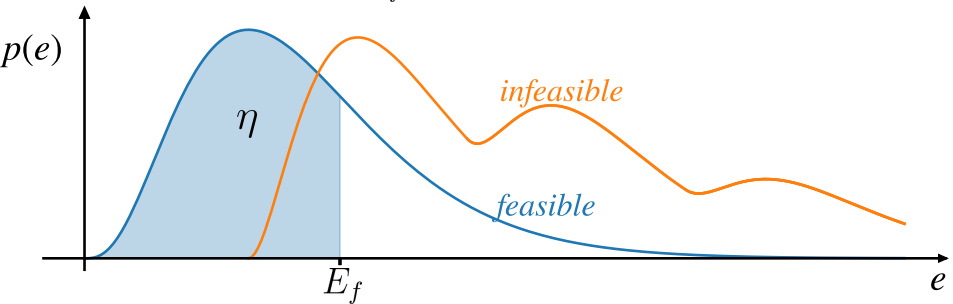


Goal: given target η , E_f , choose M such that:



Algorithm:

1. Lower bound target feasible states  $\rightarrow B_{\mathcal{F}}^{<}$
2. Upper bound high-energy feasible states  $\rightarrow B_{\mathcal{F}}^{>}$
3. Upper bound infeasible families contributions   $\rightarrow B_{\bar{\mathcal{F}}}(M)$
4. Return root of $g(M) = B_{\bar{\mathcal{F}}}(M) + B_{\mathcal{F}}^{>} - \frac{1-\eta}{\eta} B_{\mathcal{F}}^{<}$