

JavaScript Console Methods

`console.log()`

```
var testVariable = 404;  
console.log("This is triggered by console.log")  
console.log("checking the variable value",testVariable)
```

`console.info()`

Similar to `console.log` but used to print info for debugging

`console.debug()`

Similar to `log` & `info`, but requires verbose debug

`console.warn()`

Displays warning message

`console.assert()`

Prints message in console if expression is false

`console.count()`

Logs the amount of times the method has been called
Call `console.countReset()` to reset timer

`console.trace()`

Provides call path to the method

`console.time()`

```
console.time("MyTimer")  
  
for (var i = 0; i < addToCartButtons.length; i++) {  
  var button = addToCartButtons[i];  
  button.addEventListener('click', addToCartClicked)  
}  
  
console.timeEnd("MyTimer")  
  
// MyTimer: 0.408935546875 ms
```

Measures execution time | Call `console.timeEnd()` to stop timer
`console.group()`


```
console.group("First group");
console.log("Main list 1");
console.log("Main list 2");
console.log("Main list 3");
console.groupCollapsed("Collapsed group");
console.log("List 1");
console.log("List 2");
console.log("List 3");
console.groupEnd();
```

▼ First group	CartJavascript.js:26
Main list 1	CartJavascript.js:27
Main list 2	CartJavascript.js:28
Main list 3	CartJavascript.js:29
▼ Collapsed group	CartJavascript.js:30
List 1	CartJavascript.js:31
List 2	CartJavascript.js:32
List 3	CartJavascript.js:33

`console.table()` accepts the following as parameters:

Object

```
var user = {  
  name:"Ravidu",  
  age:25,  
  job:"writer",  
}  
  
console.table(user);
```

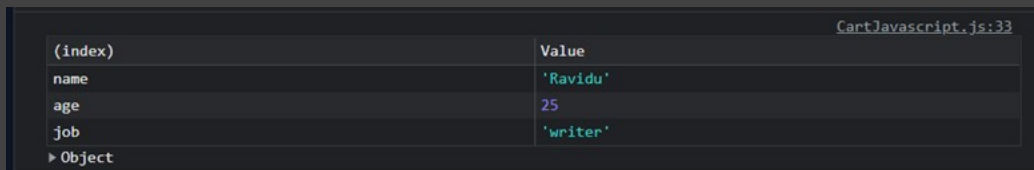


(index)	Value
name	'Ravidu'
age	25
job	'writer'

► Object

Array

```
var cities = ["Washington", "Delhi", "London", "Stockholm"];  
console.table(cities);
```

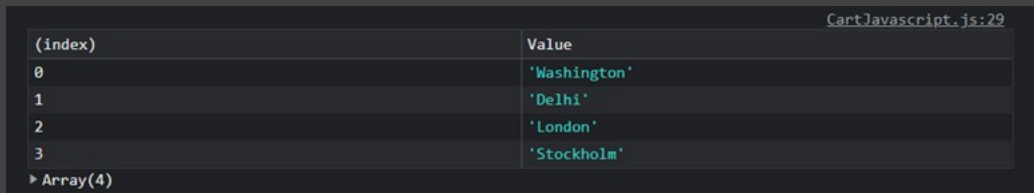

(index)	Value
0	'Washington'
1	'Delhi'
2	'London'
3	'Stockholm'

► Array(4)

Array of arrays

```
var Destinations = [ ["USA", "Washington"], ["India", "Delhi"],  
  ["UK", "London"], ["Sweden", "Stockholm"] ];  
console.table(Destinations);
```

CartJavascrpt.js:29

(index)	0	1
0	'USA'	'Washington'
1	'India'	'Delhi'
2	'UK'	'London'
3	'Sweden'	'Stockholm'

► Array(4)

Array of objects

```
var users = [  
  {  
    name: "Sam",  
    age: 30  
  },  
  {  
    name: "John",  
    age: 45  
  },  
  {  
    name: "Peter",  
    age: 20  
  }  
];  
console.table(users);
```

CartJavascrpt.js:37

(index)	name	age
0	'Sam'	30
1	'John'	45
2	'Peter'	20

► Array(3)

CartJavascrpt.js:44

Nested objects

```
var roles = {  
  writer: {  
    firstname: "Ravindu",  
    lastname: "Shehan",  
    email: "ravindu@gmail.com"  
  },  
  reviewer: {  
    firstname: "Ravindu",  
    lastname: "Shehan",  
    email: "ravindu@gmail.com"  
  }  
}
```

```
console.table (roles);
```

```
> var roles = {  
  writer: {  
    firstname: "Ravindu",  
    lastname: "Shehan",  
    email: "ravindu@gmail.com"  
  },  
  reviewer: {  
    firstname: "Ravindu",  
    lastname: "Shehan",  
    email: "ravindu@gmail.com"  
  }  
}
```

```
console.table (roles);
```

VM232:14

(index)	firstname	lastname	email
writer	'Ravindu'	'Shehan'	'ravindu@gmail.com'
reviewer	'Ravindu'	'Shehan'	'ravindu@gmail.com'

► Object