### 15-213 Introduction to Computer Systems

Final Exam May 3, 2005

Name:	Model Solution
Andrew User ID:	fp
Recitation Section:	

- This is an open-book exam.
- Notes and calculators are permitted, but not computers.
- Write your answer legibly in the space provided.
- You have 180 minutes for this exam.

# Assignment Project Exam Help

https://eduassistpro.github.io/

Add V	WeCl	ıat	edu_	_assist	_pro
	3	21			
	4	26			
	5	20			
	6	15			
	7	10			
	8	20			
	Total	150			

### 1. Data Representation (15 points)

An engineer suspected an error in the floating point unit of her processor in the IA32-family. So she wrote her own software implementation of various functions on floating point numbers conforming to the IEEE standard. Below is her implementation of a function fdouble, to be applied to single-precision floating point numbers, manipulated as 32-bit integers.

```
typedef int float_t;
float_t fdouble (float_t x) {
 int sign = x & (1 << 31); /* get sign bit */
int exp = (x >> 23) & 0xFF; /* get the biased exponent */
 int frac = x & ((1 << 23) - 1); /* get the fractional part */
 /* check for NAN or infinity */
                         ___ /* LINE 1 */
   return x;
                             /* return x if NAN or infinity */
 /* check if overfl
   if (frac >= https://eduassistpro.github.io/
     /* fix fractio
                                    /* LINE 3 */
     frac = __
              Add WeChatredu_eassist_pro
     exp = 1;
 else { /* normalized */
   /* double normalized value */
                               /* LINE 4 */
   /* check if infinity */
                               /* LINE 5 */
     /* fix result */
                                /* LINE 6 */
 }
 return sign | (exp << 23) | frac;
```

1. (12 pts) Fill in the 6 missing lines to complete the implementation.

```
Line 1: (exp == 0xFF)
Line 2: frac = frac << 1
Line 3: frac & ((1 << 23) - 1)
Line 4: exp++
Line 5: (exp == 0xFF)
Line 6: frac = 0
```

2. (3 pts) Assume float to\_float(int x); and int to\_int(float x); let us interpret the bit pattern of an integer as a single-precision floating point number and vice versa. When the engineer tested fdouble with the following function

```
void test(float x) {
  float x2 = to_float(fdouble(to_int(x)));
  if (2*x != x2) {
    printf("Not equal!\n");
    Ais(signment Project Exam Help
}
```

she found son ttps://eduassistpro.githuboid/was correct. Explai

Floating point arithmetive the LABParthieutu \_\_ assist 80 pir  $\otimes$  tended precision format. On the other hand, puted to 32-bit single precision format. The truncation of the 80-bit answer should always agree with the 32-bit answer, but GCC may generate code that performs the comparison directly in the floating point unit, without first truncating 2\*x. An example would be when x is representable in single precision, but 2\*x would be too large, such as  $3.0 \times 10^{38}$ .

### 2. Assembly Language (23 points)

The following is the assembly (GAS) result of compiling a source program in C.

```
mystery:
             %ebp
      pushl
      movl
             %esp, %ebp
      pushl
             %esi
      movl
             12(%ebp), %ecx
      pushl
             %ebx
      xorl %ebx, %ebx
      movl 8(%ebp), %esi
decl %ecx
      cmpl %ecx, %ebx
      jge
             .L7
.L5:
      movl (%esi,%ebx,4), %edx
             (%esi,%ecx,4), %eax
      movl
      movl
             %eax, (%esi,%ebx,4)
             griment Project Exam Help
      decl
             %ecx
             %ecx, %ebx
      cmpl
             https://eduassistpro.github.io/
      jl
.L7:
      popl
             Add WeChat edu_assist_pro
      popl
      popl
      ret
void mystery (mystery_t A[], int n) {
 int i = 0;
 int j = _n-1____
 while (_i < j_{\underline{}}
   int temp = A[i]
   A[i] = A[j]____;
   _i++____
   _A[j] = temp____;
```

1. (4 pts) Show the association between program variables and registers

C Variable	Register
A	%esi
i	%ebx
j	%ecx
temp	%edx

- 2. (14 pts) Fill in the gaps in the shown C source.
- 3. (5 pts) Which of the following type definitions are consistent with the assembly code? Circle yes or no.
  - (a) Yes No Yes

Assignment Project Exam Help

(b) Yes No Yes

https://eduassistpro.github.io/

(c) Yes No No type Afdrous Wie Ctenat; edu\_assist\_pro

```
(d) Yes No Yes

typedef struct {
   int x;
   int y;
} *mystery_t;
```

(e) Yes No Yes


typedef union {
 int i;
 float f;
} mystery\_t;

### 3. Out-of-Order Execution (21 points)


Consider the following program which counts the positive elements in a linked list.

```
void count_pos (List *p) {
  int i = 0;
  while (p) {
    if (p->data > 0)
       i++;
    p = p->next;
  }
  return i;
}
```

On the left we show the main loop of the program in assembly language, generated with gcc -02. The corresponding executing unit operations are given on the right.

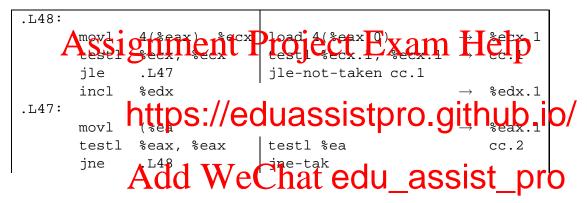

Consider the data dependency diagram on the next page which only shows the first iteration. It is drawn assuming the inner branch is not taken and the outer branch is taken which is justified if we know that most list elements are positive. We assume an issue time of 1 and latency of 3 for a load operation that is a cache hit. The diagram ignores any processor resource limitations.

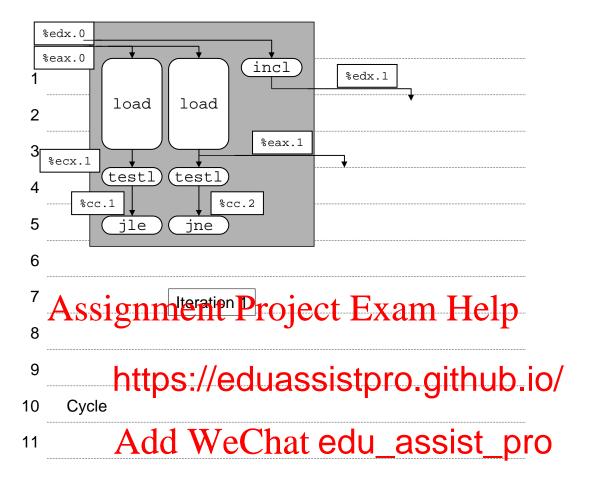

- 1. (7 pts) Label the empty boxes with the appropriately renamed registers from the execution unit.
- 2. (5 pts) What is the theoretically optimal CPE for this loop as drawn, assuming no resource limitations and perfect branch prediction?

```
3.0 CPE
```

3. (3 pts) The processor has to perform branch prediction for the two branch instructions. Which would easier to predict correctly? Explain your answer.

The backward branch controlling the loop (jle .L48) will be taken almost every time, which will be easy for the processor to predict. The forward branch (jle .L47) is data dependent and much more difficult to predict.

4. (3 pts) Explain how a conditional move instruction might improve the efficiency of this code if the list does not contain predominantly positive or negative elements.

A conditional move could be used to move 1 to a register, depending on the outcome of the comparison of \*ecx with itself. This value could then be added to the accumulator \*edx. This would avoid the need for the processor to do branch prediction for the inner branch, and would save the high cost of mispredicted branches in case positive and negative list elements are difficult to forecast.

Assignment Project Exam Help

https://eduassistpro.github.io/

Add WeChat edu\_assist\_pro

5. (3 pts) Now assume that the processor has only one load unit, but you may still assume an unbounded number of functional units. What is the theoretically optimal CPE under these assumptions. Briefly explain your answer, using a diagram if you find it helpful.

The answer remains the same: 3.0 CPE. This is because we can postpone the load shown on the left for one time unit, overlapping it with the load shown on the right. The critical path then still takes 3 CPE.

Assignment Project Exam Help

https://eduassistpro.github.io/
Add WeChat edu\_assist\_pro

### 4. Cache Memory (26 points)

Assume we have a 2-way set associative 1024-byte data cache with 16 byte blocks. We assume the machine uses 32-bit addresses and memory is byte-addressable.

- 1. (5 pts) Determine the following cache parameters.
  - (a) The block offset takes <u>4</u> bits.
  - (b) The set index takes <u>5</u> bits.
  - (c) The tag takes 23 bits.
  - (d) There are 32 total sets.
  - (e) There are <u>64</u> total cache lines.

Now Consider the following code, where N is a compile-time constant. This code sums up the first eight columns of the array.

```
int A[N][N];
int sum8cAlssignment Project Exam Help

int i,j;
int sum = 0;
for (j = 0; j https://eduassistpro.github.io/
    for (i = 0; i < 1; i+t)
    sum += A[i][j];
return sum;
}
Add WeChat edu_assist_pro</pre>
```

Assume we are on a machine where integers take up 4 bytes. You may also assume that sum, i, and j are held in a register, so that the only data cache accesses are to elements of the array A.

Assume that the array A starts at  $0 \times 800000$ .

We consider the cache behavior for N = 32 and N = 16, given an LRU eviction policy. Give your answers in hexadecimal form.

- 6. (6 pts) First, consider the case where N = 32.
  - (a) The address of A[1][0] is \_\_\_\_\_\_0x800080 \_\_\_\_.
  - (b) With i = 0 and j = 0, a block will be read into the cache containing array elements A[0][0], A[0][1], A[0][2], A[0][3]. Will this block be evicted? If so, for what value of i and j will this block be first evicted?

No Yes, with 
$$i = 8$$
 and  $j = 0$ 

[Hint: Remember that the cache is 2-way set associative, consider the order of the iterations, and keep in mind the LRU eviction policy.]

- 7. (6 pts) Second, we consider the case where N = 16.
  - (a) The address of A[1][0] is \_\_\_\_\_\_\_.
  - (b) With i = 0 and j = 0, a block will be read into the cache containing array elements A[0][0], A[0][1], A[0][2], A[0][3]. Will this block be evicted? If so, for what value of i and j will this block be first evicted?

```
No No
Yes, with i = _____ and j = _____
```

8. (3 pts) If we changed the order of iterations to

would the answers change for N = 32? Circle Yes or No. No

- 9. (3 pts) Would the answers change for N = 16? Circle Yes or No. No.
- 10. (3 pts) In general, is the first (j outermost) or second (i outermost) order of iteration preferable? Explain your answer briefly.

In general, the second order of iteration (i outermost) is preferable because it has better locality given the manner that arrays are laid out in memory. For example, the first four array elements would be processed together and then never used again, independently of the number N.

### 5. Signals (20 points)

Consider the following code, which has been written with the assumption that an unpredictable number of SIGINT interrupts can arrive asynchronously.

```
int i = 1;
 1
 2
 3
   void handler (int sig) {
 4
     i = 0;
 5
   }
 6
 7
   int main() {
 8
     int j;
9
     sigset_t s;
10
     sigemptyset(&s);
11
     sigaddset(&s, SIGINT);
12
     signal(SIGINT, handler);
13
     for (j = 0; j < 100; j++) {
14
        i++;
         Assignment Project Exam Help
15
16
17
     exit(0);
18
   };
```

https://eduassistpro.github.io/ Now we consider t t ps://eduassistpro.github.io/ mand.

For each question, indicate if and where the given calls to ask need to

serted in order to obtain precisely the indicated set of possible outputs among 0, 1, 100, 101. Note that any given run prints just one value, and that the program may also print other values, but we are only interested in 0, 1, 100, and 101.

- 1. (5 pts) All of 0, 1, 100, 101. (a)
  - (a) Neither needs to be inserted (leave next two questions blank).
  - (b) Insert sigprocmask(SIG\_BLOCK, &s, 0); right after line \_\_\_\_.

    Insert sigprocmask(SIG\_UNBLOCK, &s, 0); right after line \_\_\_\_.
- 2. (5 pts) Just 0 and 101, but not 1, or 100. **(b), 11 and 15** 
  - (a) Neither needs to be inserted (leave next two questions blank).
  - (b) Insert sigprocmask(SIG\_BLOCK, &s, 0); right after line \_\_\_\_.

    Insert sigprocmask(SIG\_UNBLOCK, &s, 0); right after line \_\_\_\_.

3. (5 pts) Just 101, but not 0, 1, or 100. (b), 11 and 16
(a) Neither needs to be inserted (leave next two questions blank).
(b) Insert sigprocmask(SIG\_BLOCK, &s, 0); right after line \_\_\_\_\_.
Insert sigprocmask(SIG\_UNBLOCK, &s, 0); right after line \_\_\_\_\_.
4. (5 pts) Just 100 and 101, but not 0, 1. (b), 12 and 16
(a) Neither needs to be inserted (leave next two questions blank).
(b) Insert sigprocmask(SIG\_BLOCK, &s, 0); right after line \_\_\_\_\_.
Insert sigprocmask(SIG\_UNBLOCK, &s, 0); right after line \_\_\_\_\_.

# Assignment Project Exam Help https://eduassistpro.github.io/ Add WeChat edu\_assist\_pro

### 6. Network Programming (15 points)

In this problem we look at a simple client/server system for a spell-checking service. We first consider the client, then the worker thread on the server, then the main server program. For simplicity, we assume the service runs on 128.2.222.158, port 3340 and the strings being spell-checked never exceed MAXBUF in length. We forego some error checking for the sake of brevity.

In each case we first present a program that you should read carefully and then answer the questions. We begin with the client program.

```
#include "csapp.h"
#define DEFAULT_PORT 3340
int main(int argc, char** argv) {
 int fd, num;
 char buf[MAXBUF];
 struct sockaddr in serveraddr;
 char *msq = arqv[1];
  if (strlen(msg) >= MAXBUF-1)_exit(1);
 if ((foassegnmento Rect) ExamtHelp serveraddr.sinfamily = AF INET;
 serveraddr.sin_family = AF_INET;
 serveraddr.sin
 serveraddr.sin
 if (connect(fdhttps://eduassistpro.githubaio/) < 0)
   exit(1);
 if ((num = write(fd, msg, strlen(msg)+1)) < 0) exit(1
 if ((num = readfoldufWeifhat eduit(assist_probuf[num] = 0;
 printf("%s", buf);
  exit(0);
}
```

### 1. (5 pts) Circle all that apply. (a), (b)

- (a) It would be preferable to use rio\_readn and rio\_writen instead of read and write because of possible short counts.
- (b) ntohl and ntohs should be changed to htonl and htons, respectively.
- (c) The last character of the server response will be lost.
- (d) We need to close the socket explicitly in order to free system resources.
- (e) We should never read and write on the same socket.

Next, the worker thread for the server. It should be designed so the main server can spawn a separate thread for each request. We assume that spell\_check(buf) modifies buf so that it contains only the incorrectly spelled words in buf and returns the number of characters in the resulting string.

```
#include "csapp.h"
#define DEFAULT_PORT 3340
int bytes_served = 0;
void* spell_thread(void *arg) {
  int n;
 int clientfd = *(int *)arg;
 char buf[MAXBUF];
 if ((n = rio_readn(clientfd, buf, MAXBUF)) < 0)</pre>
    return NULL;
 bytes_served += n;
 n = spell_check(buf);
 rio_wriAssignment Project Exam Help
 close(clientfd);
  return NULL;
 https://eduassistpro.github.io/
2. (5 pts) Circle all that apply. (a), (c), (d)
}
```

- - (a) The address pissed to see That a could create a race condition. assist probe stack, because that could create a race condition.
  - (b) The rio\_readn should be contained in a loop rather than an if because of the possibility of short counts from a socket.
  - (c) The thread may run detached or not.
  - (d) There should be a mutex to protect bytes\_served.
  - (e) The spell\_check function should protect buf with a mutex.

### Finally, the main server function.

```
int main(int argc, char **argv) {
  int listenfd, clientlen, optval=1;
 struct sockaddr_in serveraddr, clientaddr;
 if ((listenfd = socket(AF_INET, SOCK_STREAM, 0)) < 0) exit(1);</pre>
  if (setsockopt(listenfd, SOL_SOCKET, SO_REUSEADDR,
                 (const void *)&optval, sizeof(int)) < 0) exit(1);</pre>
  serveraddr.sin_family = AF_INET;
 serveraddr.sin addr.s addr = htonl(INADDR ANY);
 serveraddr.sin_port = htons(DEFAULT_PORT);
  if (bind(listenfd, (struct sockaddr*)&serveraddr, sizeof(serveraddr)) < 0)</pre>
    exit(1);
  if (listen(listenfd, 5) < 0) exit(0);</pre>
 clientlen = sizeof(clientaddr);
 while (1) {
    int clientfd;
   pthread_t thread;
    if ((clientfd = accept(listenfd, (struct_sockaddr*)&clientaddr,
               ignment<sup>1</sup>Project<sup>o</sup>Exam Help
   pthread_crea
                                                            ientfd);
   pthread_deta
                https://eduassistpro.github.io/
}
```

# 3. (5 pts) Circle all that applied et al. (5 pts) Circle

- (a) The calls to bind and listen are in the
- (b) The call to pthread\_create creates a race condition.
- (c) The calls to hton1 and htons should be replaced by ntoh1 and ntohs, respectively.
- (d) We should call pthread\_join(thread) instead of pthread\_detach(thread) in order to avoid consuming unnecessary system resources.
- (e) It would make more sense to create processes with fork instead of threads with pthread\_create because there are no shared resources anyway.

### 7. Memory Allocation (10 points)

In this problem we consider the interaction between malloc/free and multiple threads.

- 1. (5 pts) Circle all that apply. (a), (b), (d)
  - (a) Multiple threads share the same heap, so we have to consider the possibility of race conditions for malloc.
  - (b) When a correct program executes, at most one thread should call free on any given pointer.
  - (c) We do not need to worry about race conditions for free because on a correct program, at most one thread will try to call free on any given pointer.
  - (d) The internal data structures of malloc affect where best to place critical regions.
  - (e) For a correct program, memory allocated in one thread must always be freed in the same thread.
- 2. (5 pts) Describe how you would make mallog and free thread-safe. State first what kind of basic inholementation strategy (e.g., seglected free lists) is the starting point of your analysis, what kind of semaphore(s) (e.g., split binary semaphores) you would use, a oices do not need to be efficiently in the starting point of your analysis, what kind of semaphore(s) (e.g., split binary semaphores) you would use, a oices do not need to be efficiently in the starting point of your analysis, what kind of semaphore(s) (e.g., split binary semaphores) you would use, a oices do not need to be efficiently in the starting point of your analysis, what kind of semaphore(s) (e.g., split binary semaphores) you would use, a oices do not need to be efficiently in the starting point of your analysis, what kind of semaphore(s) (e.g., split binary semaphores) you would use, a oices do not need to be efficiently in the starting point of your analysis.

Assuming an explicitly linked free list, the simplest ould be to have a binary tempt hole that functions as that at most one thread is performing a ma. We wait for this semaphore upon entry to malloc and release it just before exit. The same applies for the free function. This solution could be quite inefficient if the operations take a long time and there are many calls to malloc and free from multiple threads, but one would want to perform some measurements to see if it is indeed a practical performance bottleneck. More fine-grained solutions are possible, but much trickier, and depend on more details of the implementation.

### 8. Semaphores (20 points)

In this problem we develop two symmetric solutions to the *Dining Philosophers* problem as introduced in lecture. In this problem, there is a round table with 5 plates. There are also 5 forks positioned between the plates. Philosophers think and occasionally get hungry. When they get hungry they sit down at their place and eat, for which they need the forks on both sides of their plate. When they are sated, they go back to thinking.

The following code describes a simulation of the dining philosophers for one day, assuming they eat three meals a day.

```
sem_t frk[5];
void *philosopher(void *vargp) {
 int i = (int)vargp;
 int j = 0;
 while (j < 3) {
   printf("%d thinking\n", i);
   P(&frk[i]);
   P(&frk[(i+1)%5]);
   print Assignment Project Exam Help
   V(&frk[(i+1)
   V(&frk[i]);
              https://eduassistpro.github.io/
}
              Add WeChat edu_assist_pro
int main() {
 int i;
 pthread_t tid;
 for (i = 0; i < 5; i++)
   sem_init(&frk[i], 0, 1);
 for (i = 0; i < 5; i++)
   Pthread_create(&tid, NULL, philosopher, (void *)i);
 Pthread_exit(NULL);
}
```

1. (3 pts) Explain the protocol followed by each philosopher in terms of thinking, eating, picking up, or putting down a fork which is embodied in the code.

For three iterations, each philosopher performs the following:

- (a) think
- (b) pick up fork to his right
- (c) pick up fork to his left
- (d) eat
- (e) put down fork to his left
- (f) put down fork to his right

When a fork is not available, he will simply wait until it becomes available.

## 2. (3 pts Assingrinf mounts Protine et de de Man Help

The simulatio it down and the table and pictors.//eduassistpro.glithical will.

We have a deadlock.

In terms of the code, semaphores frk[0] ll 0, and all 5 threads are at the Second FC much at the Code.

to become 1.

3. (7 pts) In order to avoid the potential deadlock, we adopt a protocol where we allow at most 4 philosophers to sit down at the table at a time. Add a semaphore to the code to implement this new protocol. Modify the code below by adding new lines to implement this protocol. Indicate clearly where the new code should go. You should not modify existing lines of code. Remember to declare and initialize your semaphore.

```
sem t frk[5];
sem_t table; /* NEW LINE 1 */
void *philosopher(void *vargp) {
 int i = (int)vargp;
 int j = 0;
 while (j < 3) {
   printf("%d thinking\n", i);
   P(&table); /* NEW LINE 2 */
   P(&frk[i]);
   Assignment Project Exam Help
   printf("%d eating\n", i);
          https://eduassistpro.github.io/
   v(&frk[iAdd WeChat edu_assist_pro
   V(&table); /* NEW LINE 3 */
}
int main() {
 int i;
 pthread_t tid;
 for (i = 0; i < 5; i++)
   sem_init(&frk[i], 0, 1);
 sem_init(&table, 0, 4); /* NEW LINE 4 */
 for (i = 0; i < 5; i++)
   Pthread_create(&tid, NULL, philosopher, (void *)i);
 Pthread_exit(NULL);
}
```

4. (7 pts) Another way to avoid the deadlock is to force every philosopher to pick up the forks to his right and left simultaneously (that is, atomically). Modify the code below by adding new lines to implement this protocol. Indicate clearly where the new code should go. You should not modify existing lines of code.

```
sem_t frk[5];
sem_t pickup;
            /* NEW LINE 1 */
void *philosopher(void *vargp) {
 int i = (int)vargp;
 int j = 0;
 while (j < 3) {
   printf("%d thinking\n", i);
   P(&pickup); /* NEW LINE 2 */
   P(&frk[i]);
   P(&frk[(i+1)%5]);
   V(&pickup); /* NEW LINE 3 */
   Aistigninent Project Exam Help
   j++;
   V(&frk[https://eduassistpro.github.io/
   V(&frk[i]);
          Add WeChat edu_assist_pro
int main() {
 int i;
 pthread_t tid;
 for (i = 0; i < 5; i++)
   sem_init(&frk[i], 0, 1);
 sem_init(&pickup, 0, 1); /* NEW LINE 4 */
 for (i = 0; i < 5; i++)
   Pthread_create(&tid, NULL, philosopher, (void *)i);
 Pthread_exit(NULL);
```