

CO526 Databases: Exercises

2018

In **family_history** database, there is a **person** table, where people are identified by their name, and always have their gender, date of birth (**dob**) and place of birth (**born_in**) recorded. In addition, each person may optionally have recorded the name of their father, and the name of their mother. If the person has died, then the date of death **dod** must be present. Note that only a fragment of the data held in the database is listed below.

person						
<u>name</u>	gender	dob	dod?	father?	mother?	born_in
Alice	F	1885-02-25	1969-12-05	null	null	Windsor
Andrew	M	1960-02-19	null	Philip	Elizabeth II	London
Andrew of Greece	M	1882-02-02	1944-12-03	George I of Greece	null	Athens
Anne (Princess)	F	1950-08-15	null	Philip	Elizabeth II	London
Charles	M	1948-11-14	null	Philip	Elizabeth II	London
Elizabeth II	F	1926-04-21	null	George VI	Elizabeth	London

⋮
 $\text{person}(\text{father}) \xrightarrow{fk} \text{person}(\text{name})$
 $\text{person}(\text{mother}) \xrightarrow{fk} \text{person}(\text{name})$

Questions

In the following questions you can test for a value v being null using the predicate $\text{isNull}(v)$, and v being not null using $\text{isNotNull}(v)$. You may use subscripts on relation names to create aliases of relations, such that person_1 , person_2 , etc. are aliases for **person**.

- Describe how you would enhance the database schema (with additional tables, columns, primary keys or foreign keys) to record the following information:
 - a monarch, and ensure that we record its name, date of birth, and date of death as **succ_year**, and **dod**.
 - the name of the monarch's mother.
 The cleanest table would be:


```
monarch(name, succ_year, country)
```

 with a foreign key constraint:


```
monarch(name)  $\xrightarrow{fk}$  person(name)
```
- Write a query in each of the following languages that returns the scheme (**name**, **born_in**) containing the name and place of birth of all people known to have been born in the same place as their mother.
 - RA
 - Datalog

(a)

$$\pi_{\text{person.name}, \text{person.born_in}} \sigma_{\text{person.mother} = \text{person}_m.\text{name} \wedge \text{person.born_in} = \text{person}_m.\text{born_in}} (\text{person} \times \text{person}_m)$$

(b) We will assume SQL type handling of NULLs in Datalog

```
shared_maternal_birthplace(Name, BornIn) :-
    person(Name, _, _, Mother, BornIn),
    person(Mother, _, _, _, BornIn).
```

- Write a query in each of the following languages that returns the scheme (**name**) containing names of all people known to be parents.

- (a) RA
- (b) Datalog

(a)

$$\pi_{\text{mother}} \sigma_{\text{IsNotNull}(\text{mother})} \text{person} \cup \pi_{\text{father}} \sigma_{\text{IsNotNull}(\text{father})} \text{person}$$

(b)

```
parent(Name) :-
    person(., ., Name, ., .),
    isNotNull(Name).
parent(Name) :-
    person(., ., ., Name, .),
    isNotNull(Name).
```

4. Write a query in each of the following languages that returns the scheme (name) containing the names of all men not known to be fathers.

- (a) RA
- (b) Datalog

(a)

$$\pi_{\text{name}} \sigma_{\text{gender}='M'} \text{person} - \pi_{\text{father}} \sigma_{\text{IsNotNull}(\text{father})} \text{person}$$

- (b) Using the general approach in the lectures:

```
isNotFather(Man) :-
    person(Man, 'M', ., ., .),
    ¬isFather(Man).
isFat
```

In this () it to

```
person(Man, 'M', ., ., .),
¬person(., ., Man, ., .)
```

Add WeChat edu_assist_pro

5. Write a query in each of the following languages returning the scheme (name) listing those people that have had at least one child of each gender that appears in the database.

- (a) RA

$$\pi_{\text{father as name,gender}} \sigma_{\text{IsNotNull}(\text{father})} \text{person} \div \pi_{\text{gender}} \text{person} \cup \pi_{\text{mother as name,gender}} \sigma_{\text{IsNotNull}(\text{mother})} \text{person} \div \pi_{\text{gender}} \text{person}$$

Note that the above answer does make the assumption that each person can be just a father, or just a mother. If you want to capture the concept of a person sometimes being a mother, and sometimes being a father, you would need a union on the LHS of each division.

- (b) Datalog

```

all_genders(Name) :-
    parent(Name, _),
    ¬missing_gender(Name).
missing_gender(Name) :-
    parent(Name, _),
    person(_, Gender, _, _, _, _),
    ¬parent(Name, Gender).
parent(Name, Gender) :-
    person(_, Gender, _, _, Name, _),
    isNotNull(Name).
parent(Name, Gender) :-
    person(_, Gender, _, _, Name, _),
    isNotNull(Name).

```

6. Suppose the following RA query q has been executed:

$\pi_{\text{person}_b.\text{name}, \text{person}_a.\text{father}} \sigma_{\text{person}_a.\text{name}=\text{person}_b.\text{mother} \wedge \text{isNotNull}(\text{person}_a.\text{father})} (\text{person}_a \times \text{person}_b)$

- If the query has been executed at one point in time, since which Δ row have been inserted into **person** to give $\text{person}' = \text{person} \cup \Delta_p$, give an RA query that returns any additional answers to the original query.
- If the enhancements requested in Question 1(a) have been added, how could your answer be improved?

(a) Note that the additional rows might be mothers, or children, or both. So

$\pi_{\Delta_p.\text{name}, \text{person}.\text{father}} \sigma_{\text{person}.\text{name}=\Delta_p.\text{mother} \wedge \text{isNotNull}(\text{person}.\text{father})} (\text{person} \times \Delta_p) \cup$
 $\pi_{\text{person}.\text{name}, \Delta_p.\text{father}} \sigma_{\Delta_p.\text{name}=\text{person}.\text{mother} \wedge \text{isNotNull}(\Delta_p.\text{father})} (\Delta_p \times \text{person}) \cup$
 $\pi_{\Delta_{p_a}.\text{name}, \Delta_{p_b}.\text{father}} \sigma_{\Delta_{p_b}.\text{name}=\Delta_{p_a}.\text{mother} \wedge \text{isNotNull}(\Delta_{p_b}.\text{father})} (\Delta_{p_b} \times \Delta_{p_a})$

- If one observes the rows of **person** in the RHS of

$\pi_{\Delta_p.\text{name}, \text{person}.\text{father}} \sigma_{\text{person}.\text{name}=\Delta_p.\text{mother} \wedge \text{isNotNull}(\text{person}.\text{father})} (\text{person} \times \Delta_p) \cup$
 $\pi_{\Delta_{p_a}.\text{name}, \Delta_{p_b}.\text{father}} \sigma_{\Delta_{p_b}.\text{name}=\Delta_{p_a}.\text{mother} \wedge \text{isNotNull}(\Delta_{p_b}.\text{father})} (\Delta_{p_b} \times \Delta_{p_a})$

7. Write an SQL query that returns the scheme (name, place of birth) of all people known to have been born in the same place as their mother.

```

SELECT person.name,
       person.born_in
FROM   person
       JOIN person AS mother
       ON  person.mother=mother.name AND person.born_in=mother.born_in

```

8. Write an SQL query that returns the scheme (name) ordered by name containing the name of all people known to be parents.

```

SELECT mother AS name
FROM person AS mother
WHERE mother IS NOT NULL
UNION
SELECT father AS name
FROM person AS father
WHERE father IS NOT NULL
ORDER BY name

```

9. Write an SQL query that returns the scheme (name) ordered by name that lists parents for whom all known children are of the same sex.

```

SELECT mother AS name,
       gender
FROM person AS mother
WHERE mother IS NOT NULL
AND gender=ALL (SELECT gender
                FROM person
                WHERE person.mother=mother.mother)
UNION
SELECT father AS name,
       gender
FROM person AS father
WHERE father IS NOT NULL
AND gender=ALL (SELECT gender
                FROM person
                WHERE person.father=father.father)
ORDER BY name;

```

Assignment Project Exam Help


10. Suppose you have information about the companies that do business with the customers, act email address, and suppliers, or business. For companies that are VAT registered, we must record their.

For suppliers, we record the purchasing manager that deal with the customers, and record a number of types of product that the supplier can supply. We record in supplier all the stock items currently being supplied. It is company policy that each stock item may come from only one supplier, and some stock items are manufactured by ACME Computing Ltd itself, and therefore have no supplier. Each stock item has a part number and description, and some stock items have their colour recorded.

For customers, we record the sales manager that deals with the customer, and a credit limit. We also record all orders made by the customer. Each order is on a particular date, is given an order number, and has a reference number given by the customer. An order may have any number of stock items, with the quantity and price for each stock item recorded.

When orders are sent, we record the tracking number of each parcel the order was sent in, and the date on which the parcel was sent. We also wish to record how much of each stock item was put in each parcel, in case the parcel gets lost and an insurance claim must be made. We record the delivery address for each order, from a record of delivery addresses, for which we record the customer name, postcode and address. We identify an address record by the combination of the customer name and postcode.

- (a) Design an ER^{ADHKLMNOSVW} schema to represent this new database.

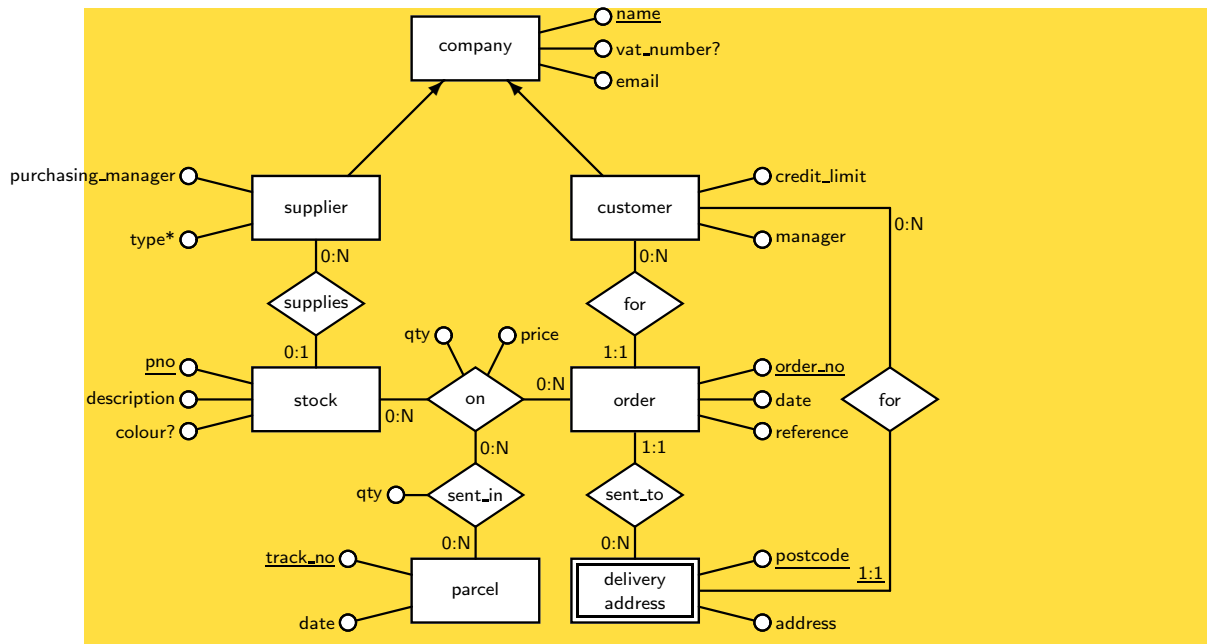

(b) Map the ER schema you designed in (i) into a relational schema.

company(name, vat_number?, email)
 supplier(name, purchasing_manager)
 supplier_type(name, type)
 customer(name, credit_limit, manager)
 stock(pno, description, colour?, name)
 order(ono, date, reference, dname, postcode)
 parcel(
 on(pno
 sent_in
 deliver
 customer(name) \xRightarrow{fk} company(name)
 supplier(name) \xRightarrow{fk} company(name)
 supplier_type(name) \xRightarrow{fk} supplier(name)
 stock(name) \xRightarrow{fk} supplier(name)
 on(pno) \xRightarrow{fk} stock(pno)
 on(ono) \xRightarrow{fk} order(ono)
 sent_in(pno, ono) \xRightarrow{fk} on(pno, ono)
 sent_in(track_no) \xRightarrow{fk} parcel(track_no)
 order(dname, postcode) \xRightarrow{fk} delivery_address(name, postcode)
 delivery_address(name) \xRightarrow{fk} customer(name)

11. Suppose that a relation $R(A, B, C, D, E, F, G, H)$ has the functional dependency set $S = \{A \rightarrow BE, AC \rightarrow G, AFG \rightarrow E, B \rightarrow ACG, CF \rightarrow D, D \rightarrow G, DEG \rightarrow FCD, G \rightarrow H\}$

(a) Compute a minimum cover S_c of S .

Rewrite with single attribute on RHS

Since $D \rightarrow G$

$DEG \rightarrow FCD \Rightarrow DE \rightarrow FCD$

Since $D \rightarrow D$

$DE \rightarrow FCD \Rightarrow DE \rightarrow CF$

Since $A \rightarrow B, B \rightarrow CG$

$AC \rightarrow G \Rightarrow \emptyset$

Since $A \rightarrow BE$

$AFG \rightarrow E \Rightarrow \emptyset$

Therefore $S_c = \{A \rightarrow BE, B \rightarrow ACG, CF \rightarrow D, D \rightarrow G, DE \rightarrow CF, G \rightarrow H\}$

- (b) Identify and justify all the candidate keys of R .

We find $A^+ = A, B, C, E, G, H$

Thus A is not a candidate key, and we should consider adding D or F to A

adding D (ie AD^+) will cover all attributes

Therefore, AF^+ covers all attributes (because of $A \rightarrow C, CF \rightarrow D$)

Therefore BD^+ and BF^+ cover all attributes (because of $B \rightarrow A$)

Since nothing determines A or B except each other, all candidate keys must include A or B , and therefore we need not consider keys based on any other attributes.

So the candidate keys are AD, BD, AF, BF

- (c) Decompose the relation R into 3NF.

Non-prime attributes are $CEGH$

Since $G \rightarrow H$, and G is not a key, remove H from R to get

$R_1(G, H)$

Since $B \rightarrow A$ and D is not a key, remove A from R to get

$R_2(D, G)$

Since

$R_3(A,$

This is

$R_4(A,$

R_1, R_2, R_3, R_4 are in 3NF.

However, the FDs $B \rightarrow G, CF \rightarrow D, D$

$B \rightarrow G$ can be preserved by adding R_5 to R_1 since $A \rightarrow B$ and $B \rightarrow A$, it is as good to preserve $A \rightarrow G$.

$DE \rightarrow CF$ can be preserved by adding $R_6(C, D, E, F)$.

Now R_1, R_2, R_4, R_5, R_6 are in 3NF and preserve FDs.

Note that it is wrong to overnormalise the relations, and you should use the algorithm to perform 3NF rather than just use all FDs to breakup the original relation.

- (d) Decompose the relation R into BCNF.

Since $A \rightarrow B$ and A is not a key, R_4 is not in BCNF, so remove B from R_4 to get

$R_7(A, B)$ and $R_8(A, D, F)$

Note that R_7 can combine into R_5 (since $A \rightarrow B$ and $B \rightarrow A$) to get $R_9(A, B, C, E, G)$

Since $CF \rightarrow D$ and CF is not a key of R_6 , we no longer can have this relation to preserve FDs. However we can add $R_{10}(C, D, F)$ to preserve $CF \rightarrow D$. To preserve $DE \rightarrow CF$ we must add $R_{11}(D, E, C)$ and $R_{12}(D, E, F)$. Now BCNF is $R_1, R_2, R_8, R_9, R_{10}, R_{11}, R_{12}$.

12. The following histories describe the sequence of operations performed respectively by four transactions T_1 – T_4 .

$H_1 = r_1[c_{CZ}], r_1[c_R], r_1[c_B], r_1[c_{GB}], c_1$

$H_2 = r_2[c_B], r_2[c_R], r_2[c_{CZ}], w_2[c_{CZ}], c_2$

$H_3 = r_3[c_B], w_3[c_B], r_3[c_{CZ}], w_3[c_{CZ}], c_3$
 $H_4 = w_4[c_R], w_4[c_B], w_4[c_{GB}], c_4$

- (a) Briefly explain if the following concurrent execution is serialisable and recoverable. If non-serialisable, explain what anomaly occurs.

$H_a = r_1[c_{CZ}], r_1[c_R], r_3[c_B], w_3[c_B], r_3[c_{CZ}], w_3[c_{CZ}],$
 $r_1[c_B], r_1[c_{GB}], c_1, c_3,$

Conflicts $r_1[c_{CZ}] \rightarrow w_3[c_{CZ}]$ and $w_3[c_B] \rightarrow r_1[c_B]$ form a cycle, therefore not serialisable.
 Anomaly is inconsistent analysis by T_1
 No dirty $r_1[c_B]$ is committed whilst still dirty, so non-recoverable

- (b) Briefly explain if the following concurrent execution is serialisable and recoverable. If non-serialisable, explain what anomaly occurs.

$H_b = r_3[c_B], w_4[c_R], w_4[c_B], w_4[c_{GB}], w_3[c_B],$
 $r_3[c_{CZ}], w_3[c_{CZ}], c_4, c_3$

Conflicts $r_3[c_B] \rightarrow w_4[c_B]$ and $w_4[c_B] \rightarrow w_3[c_B]$ form a cycle, therefore not serialisable.
 No dirty reads so recoverable and ACA. However, dirty write $w_3[c_B]$ means not ST.

- (c) Briefly explain if the following concurrent execution is serialisable and recoverable. If non-serialisable, explain what anomaly occurs.

$H_c = r_1[c_{CZ}], w_4[c_R], r_1[c_R], w_4[c_B], r_1[c_B], w_4[c_{GB}], c_4, r_1[c_{GB}], c_1$

Conflicts $w_4[c_R] \rightarrow r_1[c_R]$, $w_4[c_B] \rightarrow r_1[c_B]$, and $w_4[c_{GB}] \rightarrow r_1[c_{GB}]$, do not form a cycle, and therefore the history is serialisable.
 Two dirty reads, and therefore not ACA (or ST), but since at time of c reads are no longer dirty, the history is recoverable.


- (d) Briefly explain if the following concurrent execution is serialisable and recoverable. If non-serialisable, explain what anomaly occurs.

Since T_1 and T_2 share only one conflict (between c_R and c_Z), and therefore can sequence those two operations in any order, it means a concurrent executions of T_1, T_2 are serialisable.

Since all pairs of histories have at least one read-write conflict, there will always be a possible non-recoverable concurrent history where the read follows the write in the conflicting pair, and the transaction containing the read commits first.

- (e) Give a concurrent execution of the four transactions, which produces a deadlock involving all four transactions, and draw a waits-for graph for the deadlock state.

$r_1[c_{CZ}], r_1[c_R], r_3[c_B], w_3[c_B], r_3[c_{CZ}], \text{deadlock}$



13. The table below lists the contents of a database log, which keeps only UNDO records on a table **country**.

UNDO w_1 [c_R , population = 148,179,000]
 UNDO w_4 [c_{TR} , population = 62,481,123]
 UNDO w_2 [c_{CH} , population = 7,392,444]
 UNDO w_2 [c_{GB} , population = 58,543,111]
 UNDO w_3 [c_{CH} , population = 7,312,222]
 UNDO w_5 [c_{CH} , population = 7,210,000]
 LOG c_4
 UNDO w_3 [c_B , population = 11,020,000]
 LOG c_3

country				
name	code	capital	area	population
Czech Republic	CZ	Prague	78,703	10,321,120
Switzerland	CH	Bern	41,290	7,207,060
Russia	R	Moscow	17,075,200	148,178,487
Belgium	B	Brussels	30,510	10,170,241
Turkey	TR	Ankara	780,580	62,484,478
United Kingdom	GB	London	244,820	58,489,975
Egypt	ET	Cairo	1,001,450	63,575,107
		:		

- (a) If the country table has the contents illustrated above, describe the actions performed by the recovery procedure using the above log, and what population figures will be left after recovery.

Working back from the end of the log, we must perform the oldest UNDO action of each object from transactions which did not commit, where that UNDO is after the last UNDO action for that object from a committed transaction.

UNDO w_1 [c_R , population = 148,179,000]
 UNDO w_2 [c_{GB} , population = 58,543,111]
 UNDO w_5 [c_{CH} , population = 7,210,000]

Hence all rows of country will be the same, except for R the value will be 148,179,000, GB the value will be 58,543,111, CH the value will be 7,210,000.

- (b) If an additional LOG record were added for a_5 to record the completion of aborting T_5 , would your answer to (a) change, and if so, how does it change?

Assignment Project Exam Help
 You do not need to perform UNDO records associated with T_5 , since the purpose of recording of the abort is to indicate that the UNDO for T_5 has been completed.

- (c) Consider the above log and the following updates from transactions T_1 through T_5 written to disc, and which updates have been flushed out.

With UNDO logging, everything must be written to disc from a committed transaction, so all w_4 operations must be on disc. Since T_3 has aborted, only the updates preceding c_3 apply the the preceding c_3 .

Any transactions might have been flushed out, so all transactions preceding c_4 from T_2 , T_3 , T_4 and T_5 might be written to disc.

In UNDO only logging, there are no restrictions on which items must not have been flushed out.

<https://eduassistpro.github.io/>

Add WeChat edu_assist_pro