

THE AUSTRALIAN NATIONAL UNIVERSITY

Second Semester 2017

**COMP1600/COMP6260
(Foundations of Computation)**

Writing Period: 3 hours duration

Study Period: 15 minutes duration

Permitted Materials: One A4 page with hand-written notes on both sides

Answer ALL questions

Total marks: 100

The questions are followed by labelled blank spaces into which your answers are to be written. Additional answer panels are provided (at the end of the paper) should you wish to use more space for an answer than the space provided. If you require more space on an answer panel, be sure to indicate this by drawing a vertical line down the right-hand side of the panel.

Assignment Project Exam Help
<https://eduassistpro.github.io/>

Student Number:

Add WeChat edu_assist_pro

The following spaces are for use by the examiners.

Q1 (Logic)	Q2 (ND)	Q3 (SI)	Q4 (HL)	Q5 (FSA)	Q6 (CFL)
------------	---------	---------	---------	----------	----------

Q7 (TM)

Total

QUESTION 1 [8 marks]

Logic

- (a) Consider the truth value assignment v that assigns the following truth values to the atomic propositions p , q and r : $v(p) = F$, $v(q) = T$, $v(r) = T$.

Which of the following formulae evaluate to T under the assignment v , i.e. when the truth values of p , q and r are given according to v ?

- (1). $(p \rightarrow \neg q) \vee \neg(r \wedge q)$ (3). $\neg(\neg p \rightarrow q) \wedge r$
(2). $(\neg p \vee \neg q) \rightarrow (p \vee \neg r)$ (4). $\neg(\neg p \rightarrow q \wedge \neg r)$

QUESTION 1(a)

[4 marks]

- (b) Consider the boolean function given by the following truth table:

x	y		
F	F		
F	F		
F	T	F	F
F	T	T	T

T	T	F	T
T	T	T	

<https://eduassistpro.github.io/>

Give a formula (in variables x , y and z) that represents the function given above.
Briefly argue *why* the formula indeed represents the boolean function.

QUESTION 1(b)

[4 marks]

QUESTION 2 [14 marks]**Natural Deduction**

The following questions ask for proofs using natural deduction. Present your proofs in the Fitch style as used in lectures. You may only use the introduction and elimination rules given in Appendix 1. Number each line and include justifications for each step in your proofs.

- (a) Give a natural deduction proof of $\neg a \wedge \neg b \rightarrow \neg(a \vee b)$

QUESTION 2(a)

[8 marks]

Assignment Project Exam Help

<https://eduassistpro.github.io/>

Add WeChat edu_assist_pro

- (b)** Give a natural deduction proof of $\forall x(P(x) \rightarrow \exists y.P(y))$.

QUESTION 2(b)

[2 marks]

Assignment Project Exam Help

<https://eduassistpro.github.io/>

Add WeChat edu_assist_pro

- (c) Give a natural deduction proof of $\forall z.((\forall x.P(x) \rightarrow Q(x)) \wedge \neg Q(z) \rightarrow \neg P(z))$.

QUESTION 2(c)

[4 marks]

Assignment Project Exam Help

<https://eduassistpro.github.io/>

Add WeChat edu_assist_pro

QUESTION 3 [16 marks]

Structural Induction

- (a) Give an inductive proof the fact that consecutively mapping two functions over a list is equivalent to mapping their composition over the list. That is:

$$\text{map } f \ (\text{map } g \ xs) = \text{map } (f . g) \ xs$$

The definitions of `map` and `compose` (.) are:

$$\begin{array}{ll} \text{map } f \ [] = [] & \text{-- } M1 \\ \text{map } f \ (x:xs) = f \ x : \text{map } f \ xs & \text{-- } M2 \\ (f . g) \ x = f \ (g \ x) & \text{-- } C \end{array}$$

- (i) State and prove the base case goal

QUESTION 3(a)(i)

[2 marks]

Assignment Project Exam Help

<https://eduassistpro.github.io/>

Add WeChat edu_assist_pro

- (ii) State the inductive hypothesis

QUESTION 3(a)(ii)

[1 mark]

(iii) State and prove the step case goal.

QUESTION 3(a)(iii)

[4 marks]

Assignment Project Exam Help

<https://eduassistpro.github.io/>

Add WeChat edu_assist_pro

(b) Consider the following functions defined on lists over an arbitrary type a

```
takew :: (a -> Bool) -> [a] -> [a]
takew p [] = []
takew p (x:xs) = if (p x) then x:(takew p xs) else []
```

```
dropw :: (a -> Bool) -> [a] -> [a]
dropw p [] = []
dropw p (x:xs) = if p x then (dropw p xs) else (x:xs)
```

together with the append function and the standard equations for if

```
(++) :: [a] -> [a] -> [a]
[]      ++ ys      = ys           -- A1    if True  then p else _ = p -- I1
(x:xs) ++ ys     = x : (xs ++ ys) -- A2    if False then _ else q = q -- I2
```

Show, using structural induction on lists, that the property

$$P(xs) = \text{takew } p \text{ } xs \text{ } ++ \text{ } \text{dropw } p \text{ } xs = xs$$

holds for all lists xs and all functions $p : a \rightarrow \text{Bool}$.

In all proofs indicate the justification (eg, the line of a definition used) for each step.

- (i) State and pro-

QUES <https://eduassistpro.github.io/> [2 marks]

Add WeChat edu_assist_pro

- (ii) State the inductive hypotheses of the proof of P.

QUESTION 3(b)(ii)

[1 mark]

- (iii) State and prove the step case goal of the proof of P.

QUESTION 3(b)(iii)

[6 marks]

Assignment Project Exam Help

<https://eduassistpro.github.io/>

Add WeChat edu_assist_pro

QUESTION 4 [18 marks]**Hoare Logic**

- (a) For which programs S does $\{False\} S \{True\}$ hold?

QUESTION 4(a)

[2 marks]

- (b) The following piece of code is called *Half*:

```
x := 0;  
y := 0;  
while (x < a)  
    x := x + 2;  
    y := y + 1;
```

We wish to use Hoare Logic (Appendix 3) to show that:

Assignment Project Exam Help $\{True\} Half \quad x = 2 \quad y$

In the questions b body of the loop ($x := 0; y := 0;$)

<https://eduassistpro.github.io/>

- (i) Given the desired postcondition $\{x = 2$ (Hint: notice that the postcondition is independent of y .)

Add WeChat edu_assist_pro

[3 marks]

QUESTION 4(b)(i)

- (ii) Prove that your answer to the previous question is indeed a loop invariant. That is, if we call your invariant P , show that $\{P\} \text{ Body } \{P\}$. Be sure to properly justify each step of your proof.

QUESTION 4(b)(ii)

[3 marks]

Assignment Project Exam Help

- (iii) Using the previous result and some more proof steps show that

{ <https://eduassistpro.github.io/>

Be sure to p

QUESTION 4(b)(iii)

[4 marks]

Add WeChat edu_assist_pro

- (iv) To prove total correctness of the program *Half*, identify and state a suitable *variant* for the loop. Using the same invariant P as above, the variant E should have the following two properties:

- it should be ≥ 0 when the loop is entered, i.e. $P \wedge (x < a) \rightarrow E \geq 0$
- it should decrease every time the loop body is executed, i.e. $[P \wedge (x < a) \wedge E = k] \text{ body } [P \wedge E < k]$

You just need to state the variant, and do not need to prove the two bullet points above (yet).

QUESTION 4(b)(iv)

[2 marks]

- (v) For the variant E you have identified above, give a proof of the premise of the while-rule for total correctness, i.e. give a Hoare-logic proof of $[P \wedge (x < a) \wedge E = k] \text{ body } [P \wedge E < k]$ and argue that $P \wedge (x < a) \rightarrow E \geq 0$.

QUESTION 4(b)(v)

[4 marks]

Assignment Project Exam Help

<https://eduassistpro.github.io/>

Add WeChat edu_assist_pro

QUESTION 5 [13 marks]**Finite State Automata**

- (a) Design a Finite State Automaton that recognises the language of all strings over the alphabet $\Sigma = \{a, b, c\}$ where no a is followed by b , and no b is followed by c , and no c is followed by a .

QUESTION 5(a)

[3 marks]

Assignment Project Exam Help

<https://eduassistpro.github.io/>


Add WeChat edu_assist_pro

- (b) Is your Finite State Automaton (above) deterministic or non-deterministic? Explain.

QUESTION 5(b)

[1 mark]

(c) What language is recognised by the following Finite State Automaton?

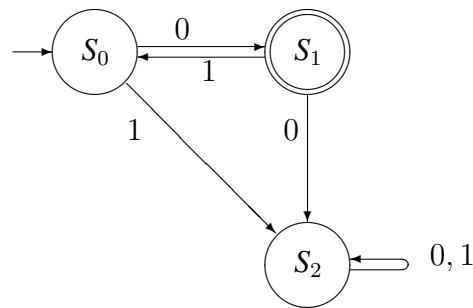

Describe the language in English, and give a regular expression defining the language.

QUESTION 5(c)

[3 marks]

Assignment Project Exam Help

<https://eduassistpro.github.io/>

(d) Consider the statement

$$\forall w \in \Sigma^* . N^*(S_2, w) = S_2$$

Express this property in English. Why might it be relevant?

QUESTION 5(d)

[2 marks]

(e) For the Finite State Automaton above, prove that

$$\forall n \in \mathbb{N} . N^*(S_1, (10)^n) = S_1$$

QUESTION 5(e)

[4 marks]

Assignment Project Exam Help

<https://eduassistpro.github.io/>

Add WeChat edu_assist_pro

QUESTION 6 [12 marks]**Context-Free Grammars**

- (a) Give a context-free grammar that generates the following language:

$$\{a^n b^m \mid n > m > 0\}$$

QUESTION 6(a)

[3 marks]

- (b) Demonstrate that the following grammar is ambiguous:

$$E \rightarrow 0 \mid 1 \mid E \& E \mid (E)$$

Assignment Project Exam Help [3 marks]

<https://eduassistpro.github.io/>

Add WeChat edu_assist_pro

- (c) Give a grammar that generates the same language as above, but is *not* ambiguous.

QUESTION 6(c)

[3 marks]

Assignment Project Exam Help

- (d) Demonstrate that the language is *not* regular.

QUESTION 6


[3 marks]

<https://eduassistpro.github.io/>

Add WeChat edu_assist_pro

QUESTION 7 [19 marks]**Turing Machines**

- (a) The following diagram shows a Turing machine, whose purpose is either to accept or reject the input string. The input string consists of ‘a’s and ‘b’s, and the rest of the tape is blank. (A string accepted if the machine reaches the halt state and rejected if the machine gets stuck in another state.) Initially the head is somewhere on the input string.

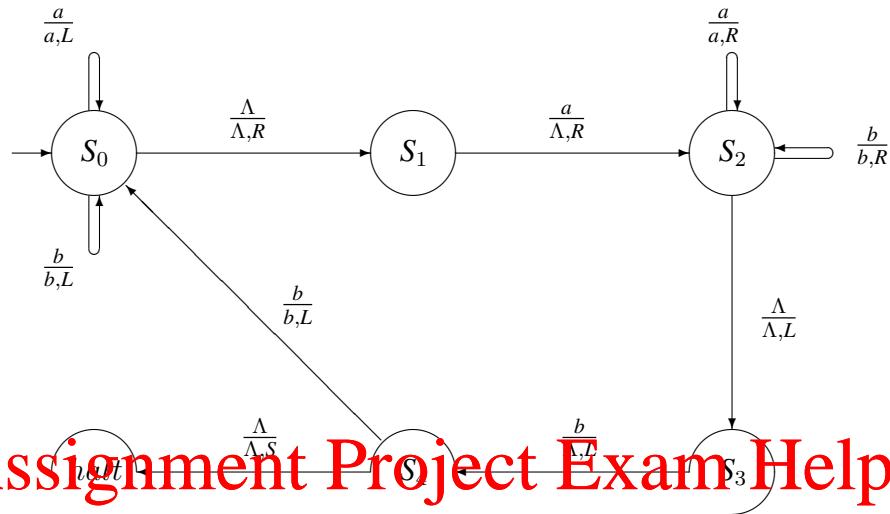

- (i) Give a general answer to the question: <https://eduassistpro.github.io/> [2 marks]

Add WeChat edu_assist_pro

- (ii) What change is accomplished on the tape if the machine moves from state S_1 to state S_4 ?

QUESTION 7(a)(ii)

[3 marks]

Assignment Project Exam Help

- (iii) What is the la

QUES <https://eduassistpro.github.io/> [3 marks]

Add WeChat edu_assist_pro

- (b)** Design a Turing Machine which adds an even parity check bit to the right hand end of a bit string. The tape initially contains a non-empty string of binary digits and the read head is somewhere on the string. If there is an *odd* number of 1s in the string, the machine adds another *1* to the right hand end of the string and halts. If there is an *even* number of 1s in the string, the machine adds a *0* to the right hand end of the string and halts. For example:

$$\begin{array}{ll} 0011000 & \xrightarrow{\quad} 0011000\underline{0} \\ 0011010 & \xrightarrow{\quad} 0011010\underline{1} \\ 0000000 & \xrightarrow{\quad} 0000000\underline{0} \end{array}$$

QUESTION 7(b)

[5 marks]

Assignment Project Exam Help

<https://eduassistpro.github.io/>

Add WeChat edu_assist_pro

(c) Answer the following questions in one sentence.

- (i) What is the class of languages recognised by Turing machines?

QUESTION 7(c)(i)

[2 marks]

- (ii) If a language L is recursively enumerable but not recursive, is the problem P_L of L decidable?

QUESTION 7(c)(ii)

[2 marks]

- (iii) Are decidable problems easy to solve? If not, give an example that is hard to solve.

QUESTION 7(c)(iii)

[2 marks]

Assignment Project Exam Help

<https://eduassistpro.github.io/>

Add WeChat edu_assist_pro

Additional answers. Clearly indicate the corresponding question and part.

Assignment Project Exam Help

Additional answers.

<https://eduassistpro.github.io/>

Add WeChat edu_assist_pro

Additional answers. Clearly indicate the corresponding question and part.

Assignment Project Exam Help

Additional answers.

<https://eduassistpro.github.io/>

Add WeChat edu_assist_pro

Additional answers: deliberately left like this for use in landscape mode. Clearly indicate the corresponding question and part.

Assignment Project Exam Help

<https://eduassistpro.github.io/>

Add WeChat edu_assist_pro

Additional answers: deliberately left like this for use in landscape mode. Clearly indicate the corresponding question and part.

Assignment Project Exam Help

<https://eduassistpro.github.io/>

Add WeChat edu_assist_pro

Appendix 1 — Natural Deduction Rules

Propositional Calculus

$$(\wedge I) \quad \frac{p \quad q}{p \wedge q} \qquad (\wedge E) \quad \frac{p \wedge q}{p} \quad \frac{p \wedge q}{q}$$

$$(\vee I) \quad \frac{p}{p \vee q} \quad \frac{p}{q \vee p} \qquad (\vee E) \quad \frac{p \vee q \quad r \quad r}{r}$$

$$(\rightarrow I) \quad \frac{q}{\frac{p \rightarrow q}{[p]}} \qquad (\rightarrow E) \quad \frac{p \quad p \rightarrow q}{[p]}$$

Assignment Project Exam Help

<https://eduassistpro.github.io/>

$$(\neg I) \quad \frac{}{\neg p} \qquad (\text{PC}) \quad \frac{}{}$$

Add WeChat edu_assist_pro

$$(\neg E) \quad \frac{p \quad \neg p}{F} \qquad (\text{T}) \quad \frac{}{T}$$

Predicate Calculus

$$(\forall I) \quad \frac{P(a) \quad (a \text{ arbitrary})}{\forall x. P(x)} \qquad (\forall E) \quad \frac{\forall x. P(x)}{P(a)}$$

$$(\exists I) \quad \frac{P(a)}{\exists x. P(x)} \qquad (\exists E) \quad \frac{\exists x. P(x) \quad q \quad (a \text{ arbitrary})}{q \quad (a \text{ is not free in } q)}$$

Appendix 2 — Truth Table Values

p	q	$p \vee q$	$p \wedge q$	$p \rightarrow q$	$\neg p$	$p \Leftrightarrow q$
T	T	T	T	T	F	T
T	F	T	F	F	F	F
F	T	T	F	T	T	F
F	F	F	F	T	T	T

Assignment Project Exam Help

<https://eduassistpro.github.io/>

Add WeChat edu_assist_pro

Appendix 3 — Hoare Logic Rules

- Precondition Strengthening:

$$\frac{P_s \rightarrow P_w \quad \{P_w\} S \{Q\}}{\{P_s\} S \{Q\}}$$

- Postcondition Weakening:

$$\frac{\{P\} S \{Q_s\} \quad Q_s \rightarrow Q_w}{\{P\} S \{Q_w\}}$$

- Assignment:

$$\{Q(e)\} x := e \{Q(x)\}$$

- Sequence:

$$\frac{\{P\} S_1 \{Q\} \quad \{Q\} S_2 \{R\}}{\{P\} S_1; S_2 \{R\}}$$

- **Assignment Project Exam Help**

$$\frac{\{P \wedge b\}}{\{ \text{https://eduassistpro.github.io/} \}}$$

- While Loop:

$$\frac{\{P \wedge b\} \vdash \{P\}}{\{P\} \text{ while } b \text{ do } S \{P \wedge \neg b\}}$$